




The contrasts created by the matte and intense striated graphite surface together with streaks of bright and fractured white veins that cross it, give the Port Noir series a sumptuous aesthetic and ideal qualities for both flooring and wall cladding uses.

Glazed Porcelain

⇔ ◇ 24"x48" R - 12"x24" R

Glazed Porcelain

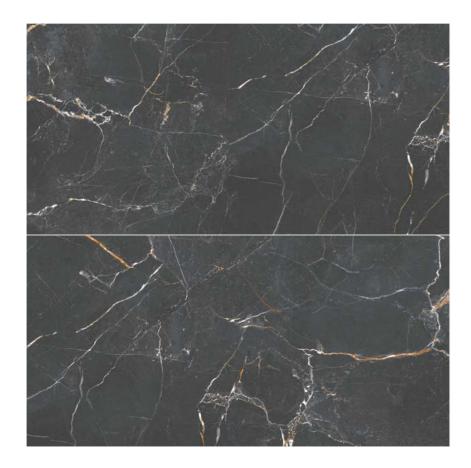


Port Noir

24"x48" R F1K7A54161

12"x24" R F1K7A57161

Other Faces

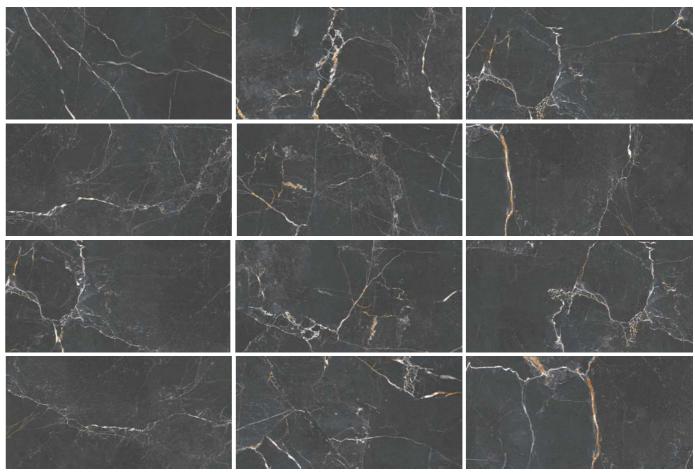

12"x24" R

4 | Port Noir | 5

Glazed Porcelain

Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	ISO-10545/3	<=0.5%
Break Strength	ISO-10545/4	>=275
Chemical Resistance	C650	Unaffected
Frost Resistance	C1026	Resistant
Group	See FAQ's	4
Deep Abrasion - Unglazed Tiles	C1243	Pass
PEI- Glazed Tiles	C1027	-
Minimum Bond Strength	C482	165
Dynamic Coefficient of Friction (DCOF)	A137.1	>=0.42
Shade and Texture Rating	CTDA	V3
Facial Dimensions	C499	Pass
Range of Thickness	C499	Pass
Warpage	C485	Pass
Wedging	C502	Pass

Packaging Information

Size	SF per carton	PC per carton	BX per pallet
12"x24" R	15.50	8	32
24"x48" R	23.25	3	30