



**EVO LUX**®  
LUXURY EVOLVING





Our commitment to innovation and quality has led us to introduce our new LVT category, we've developed a collection that not only meets but exceeds the expectations of modern living spaces. Our LVT range offers unparalleled versatility, performance, and aesthetics.

EVOLUX is engineered to withstand heavy foot traffic and daily wear, ensuring lasting beauty in any space. Our portfolio owns a nice array of styles from classic elegance to contemporary chic, ready to serve residential and commercial projects. EVOLUX matched with Roca Tile excellent customer service is a guarantee for success.



Powell Oak 7"x48"

## Table of contents

<b>Lotus</b>	<b>06</b>
<b>Lotus +</b>	<b>10</b>
<b>Powell</b>	<b>12</b>
<b>Fume</b>	<b>14</b>
<b>Iris</b>	<b>16</b>
<b>Apres</b>	<b>20</b>
<b>Packaging Information -</b>	<b>24</b>
<b>Technical Specifications -</b>	
<b>Installation - Care - Warranty</b>	

# Lotus

Glue Down




**7"x48"** 12 mil - Wood Embossed  
18x122 cm

The Lotus Series captures the classic look of natural wood, presenting a simple yet elegant aesthetic ideal for any space that desires a touch of natural beauty.



## Blonde




**7"x48"**  
EVLOTU1003



## Taupe



**7"x48"**  
EVLOTU1007

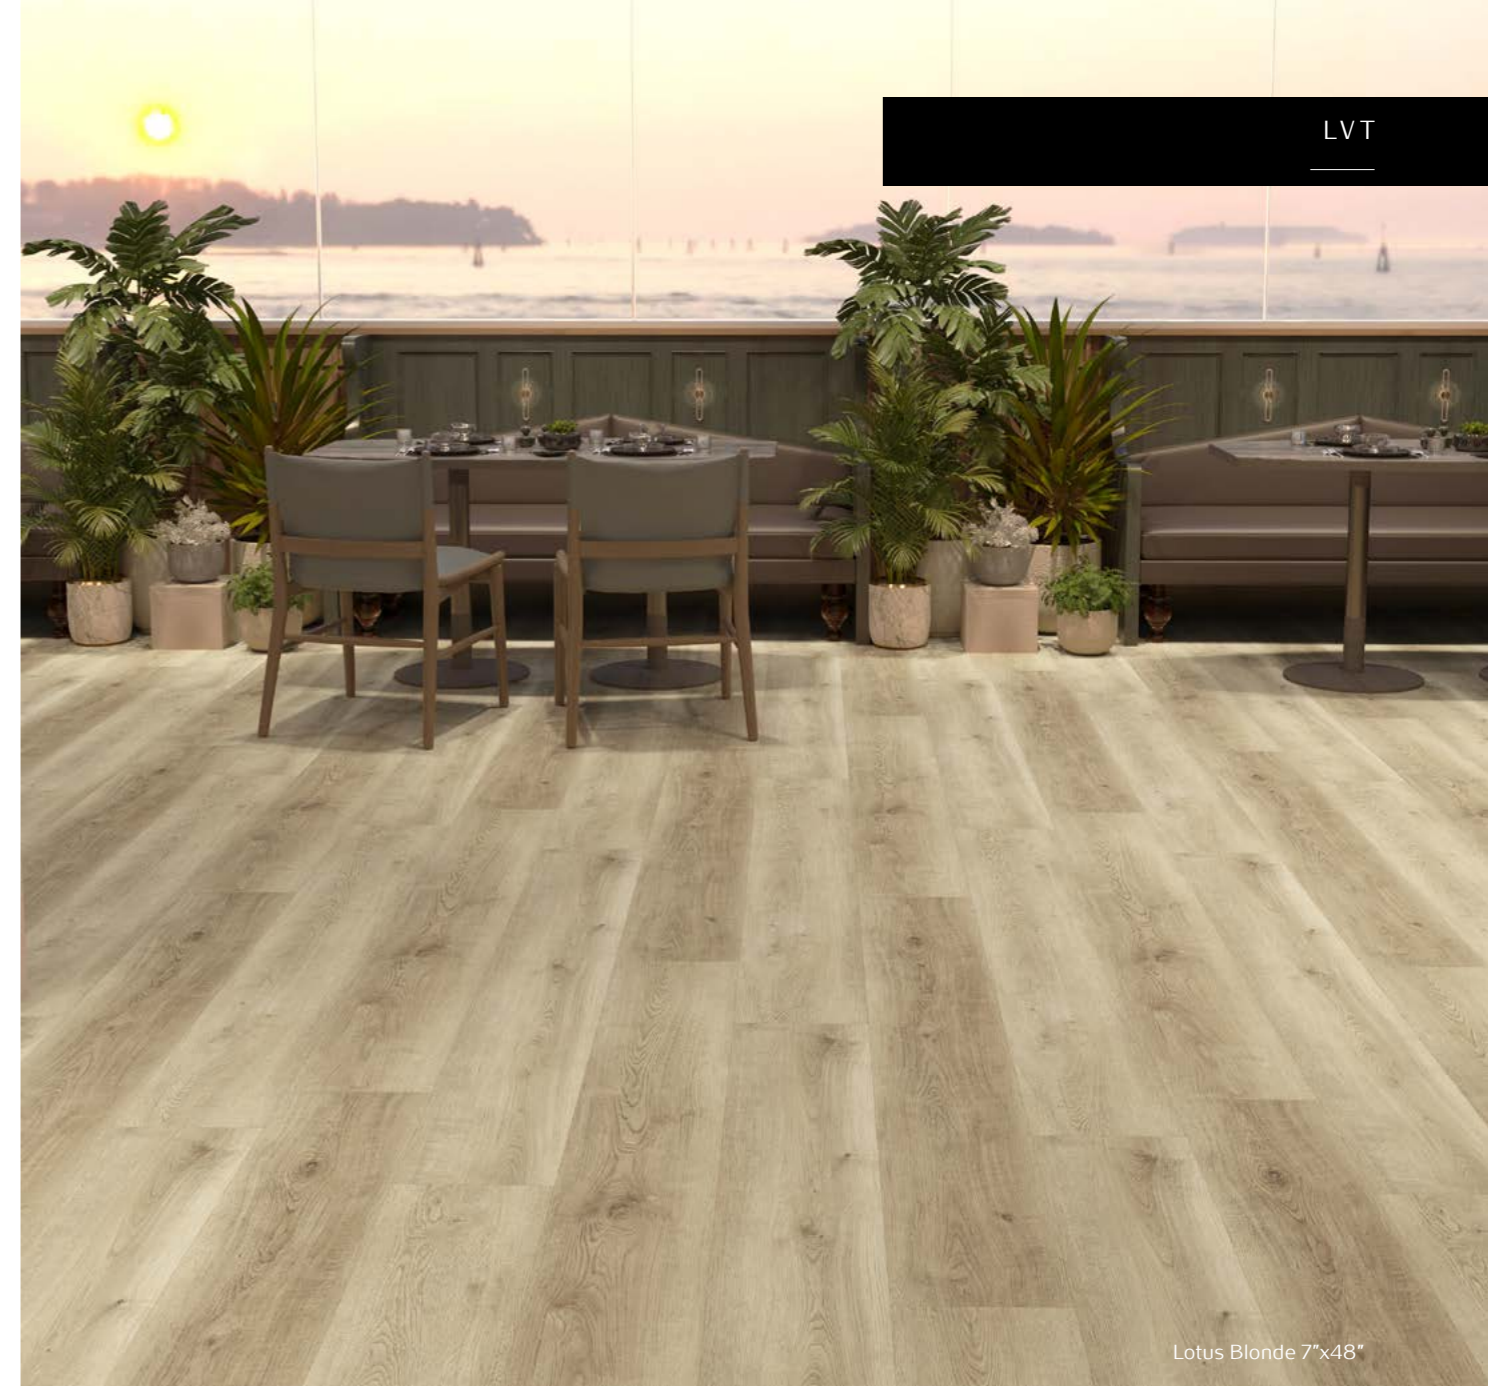

Lotus Blonde 7"x48"



Lotus Taupe 7"x48"

# Lotus

Glue Down

2 mm




**7"x48"** 12 mil - Wood Embossed  
18x122 cm



Lotus Cocoa 7"x48"




## Snow



**7"x48"**  
EVLOTU1005



## Cocoa



**7"x48"**  
EVLOTU1008



## Ash



**7"x48"**  
EVLOTUL005



## Maple



**7"x48"**  
EVLOTU1006

# Lotus +

Glue Down

2.5 mm



7"x48" 20 mil - Wood Embossed  
18x122 cm

Lotus + enhances the home with its wood-like appearance that is as authentic as it is welcoming, setting the stage for warm and sophisticated interiors.



## Honey

7"x48"  
EVLOTU3005



## Maple

7"x48"  
EVLOTU3002



## Smoke

7"x48"  
EVLOTU3003



Lotus + Honey 7"x48"



Lotus + Maple 7"x48"



Lotus + Smoke 7"x48"

# Powell

Glue Down

2.5 mm




7"x48"  
18x122 cm

20 mil - Wood Embossed

The Powell Series showcases the grandeur and depth of traditional wooden floors, providing a robust and rich visual anchor for any room.



## Silver



7"x48"  
EVPOWEL01



## Oak



7"x48"  
EVPOWEL05



## Weath



7"x48"  
EVPOWEL12




LVT

Powell Driftwood 7"x48"



## Driftwood



7"x48"  
EVPOWE604



## Oregon



7"x48"  
EVPOWE504



## Ridge



7"x48"  
EVPOWE607

# Fume

SPC Rigid Core Click Floating

4.5 mm



Finish  
NANO SILVER  
COATING


IXPE Pad  
Attached

7"x48" 12 mil - Wood Embossed  
18x122 cm

Fume offers a bold and dramatic wood-inspired look, its deep tones providing a strong and sophisticated foundation for a variety of decor styles.



## Cotton



7"x48"  
EVFUME1L4




## Silk



7"x48"  
EVFUMELO3



## Honey



7"x48"  
EVFUMELO4

\*Coordinating Trims Available  
T-mold, reducer, stairnosing.



LVT

Fume Maple 7"x48"



## Maple



7"x48"  
EVFUMELO7




## Canela



7"x48"  
EVFUME3L5



## Tabacco



7"x48"  
EVFUME623



# Iris

SPC Rigid Core Click Floating



**7"x48"** 20 mil - Wood Embossed  
18x122 cm

Bright and inviting, the Iris Series mirrors the light, natural tones of softwood, infusing spaces with an airy and open ambiance.



## Off White



**7"x48"**  
EVIRISL002



## Almond



**7"x48"**  
EVIRISL139



## Oak



**7"x48"**  
EVIRISL004

\*Coordinating Trims Available  
T-mold, reducer, stairnosing.



Iris Off White 7"x48"



Iris Almond 7"x48"



Iris Oak 7"x48"

# Iris

SPC Rigid Core Click Floating

5 mm



Finish  
NANO SILVER  
COATING

IXPE Pad  
Attached

**7"x48"** 20 mil - Wood Embossed  
18x122 cm



Iris Walnut 7"x48"



## Bleached



**7"x48"**  
EVIRISL005




## Walnut



**7"x48"**  
EVIRISL601




## Maple



**7"x48"**  
EVIRISL015



## Oil



**7"x48"**  
EVIRISL003



## Blonde



**7"x48"**  
EVIRISL012



## Smoke



**7"x48"**  
EVIRISL011

\*Coordinating Trims Available  
T-mold, reducer, stairnosing.



**9"x60"**  
 23x152 cm  
**20 mil - EIR (Embossed in Registered)**  
**Bevel: Painted Micro-Bevel**

The Apres Series embodies the cozy charm of wooden aesthetics, reminiscent of a relaxing mountain hideaway, ideal for creating a warm and inviting atmosphere.



Apres Galao 9"x60"



**Panna**



**9"x60"**  
 EVAPRES004



**Galao**



**9"x60"**  
 EVAPRES006




**Latte**



**9"x60"**  
 EVAPRES002

**\*Coordinating Trims Available**  
 T-mold, reducer, stairnosing.

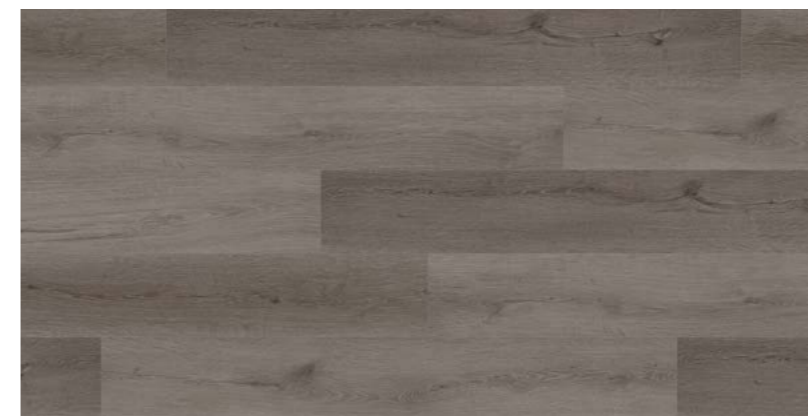

**Espresso**



**9"x60"**  
 EVAPRES007

5.5 mm

Finish


- Diamond Guard
- Health Guard
- Unilin

IXPE Pad Attached

**9"x60"**  
23x152 cm

20 mil - EIR (Embossed in Registered)  
Bevel: Painted Micro-Bevel

## TriCore™ Premium Construction

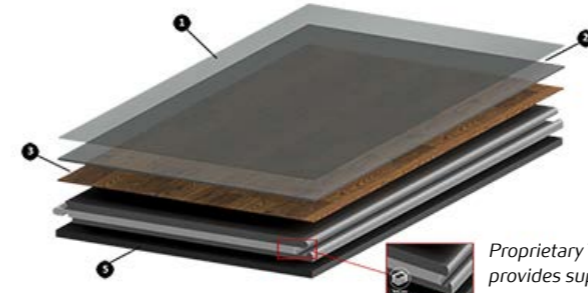

1. Diamond Guard™
2. PVC Wear Layer
3. Printed Film
4. Water proof Tri-Core™
5. QuietStep Cushion™



### Macchiato



**9"x60"**  
EVAPRES003



### Caramel



**9"x60"**  
EVAPRE5005



### Mocha



**9"x60"**  
EVAPRELO05

**\*Coordinating Trims Available**  
T-mold, reducer, stairnosing.





### Irish





**9"x60"**  
EVAPRES008

# Technical Specifications - Glue Down



Lotus 12mil Glue Down		
	Standard	Result
Thickness		2.0mm
Size		7"x48"
Material		Virgin Vinyl
Wear Layer		12 mil
Surface Treatment		Diamond Guard / Health Guard
Surface Texture		Wood Emboss
Warranty	Commercial / Residential	10 year Light Commercial / Limited Lifetime Residential
Installation		Glue down
Beveled Edge		No
Classification	ASTM F1700	Class III Type B
Reaction to fire	ASTM E648-06	Class 1
Smoke Density	ASTM E662-06	Pass <450
Slip resistance	ASTM C1028	Pass ADA Compliant (>0.50)
Staining resistance	ASTM F925	Pass
Light Resistance	ASTM F1514	Pass
Abrasion resistance	ASTM D4060-14	Pass
Dimensional stability	ASTM F2199	Pass 0.011 in / ft <0.020 in / ft
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	$\Delta$ IIC = 4 dB
Static load	ASTM F970	Pass 1000 psi / 250 psi (<0.005 in)
Flexibility	ASTM F137	Pass
Phthalate free		Yes

Powell 20mil Glue Down		
	Standard	Result
Thickness		2.5 mm
Size		7"x48"
Material		100% Virgin Vinyl
Wear Layer		20 mil
Surface Treatment		Nano Silver Coating
Surface Texture		Wood Emboss
Warranty	Commercial / Residential	15 year Commercial / Limited Lifetime Residential
Installation		Glue down
Beveled Edge		No
Classification	ASTM F1700	Class III Type B
Reaction to fire	ASTM E648-06	Class 1
Smoke Density	ASTM E662-06	Pass <450
Coefficient of Friction	ASTM C1028	Pass ADA Compliant (.0.50)
Staining resistance	ASTM F925	Pass
Light Resistance	ASTM F1515	Pass
Abrasion resistance	ASTM D4060	Pass
Dimensional stability	ASTM F2199	Pass
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	$\Delta$ IIC = 4 dB
Static load	ASTM F970	Pass
Flexibility	ASTM F137	Pass
Phthalate free		Yes

Lotus + 20mil Glue Down		
	Standard	Result
Thickness		2.5 mm
Size		7"x48"
Material		Virgin Vinyl
Wear Layer		20 mil
Surface Treatment		Diamond Guard / Health Guard
Surface Texture		Wood Emboss
Warranty	Commercial / Residential	15 year Commercial / Limited Lifetime Residential
Installation		Glue down
Beveled Edge		No
Classification	ASTM F1700	Class III Type B
Reaction to fire	ASTM E648-06	Class 1
Smoke Density	ASTM E662-06	Pass <450
Slip resistance	ASTM C1028	Pass ADA Compliant (>0.50)
Staining resistance	ASTM F925	Pass
Light Resistance	ASTM F1514	Pass
Abrasion resistance	ASTM D4060-14	Pass
Dimensional stability	ASTM F2199	Pass 0.011 in / ft <0.020 in / ft
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	$\Delta$ IIC = 4 dB
Static load	ASTM F970	Pass 1000 psi / 250 psi (<0.005 in)
Flexibility	ASTM F137	Pass
Phthalate free		Yes

# Technical Specifications - Rigid Core

## Fume Rigid Core - 12mil

	Standard	Result
Thickness		4.5mm
Size		7"x48"
Material		SPC
Wear Layer		12 mil
Surface Treatment		Nano Silver Coating
Surface Texture		Wood Emboss
Padding		1mm IXPE
Warranty	Commercial / Residential	10 year Commercial / Limited Lifetime Residential
Installation		Unilin Click
Beveled Edge		No
Smoke Density	ASTM E662-06	Pass <450
Slip resistance	ASTM C1028	Pass
Staining resistance	ASTM F925	Pass
Light Resistance	ASTM F1515	Pass
Abrasion resistance	ASTM D4060	Pass
Dimensional stability	ASTM F2199	Pass
Acoustic impact noise reduction IIC	ASTM E492-09	IIC = 62 dB concrete slab 6" drop ceiling
Calculated Sound Transmission STC	ASTM E413-16	STC = 68 db
Static load	ASTM F970-17	Pass
Indentation	ASTM F1914	Pass
Phthalate free		Yes



## Apres Rigid Core - 20mil



	Standard	Result
Thickness		5.5mm
Size		9"x60"
Material		SPC Tricore
Wear Layer		20 mil
Surface Treatment		Diamond Guard / Health Guard
Surface Texture		EIR Registered Embossed
Padding		1mm IXPE
Warranty	Commercial / Residential	15 year Commercial / Limited Lifetime Residential
Installation		Unilin Click
Beveled Edge		Painted Micro-bevel
Smoke Density	ASTM E662-19	Pass
Static Coefficient of Friction	ASTM C1028-07e1	Pass
Chemical Resistance	ASTM F925	Pass
Resistance to light	ASTM F1514	Pass
Abrasion resistance	ASTM D4060-14	Pass
Dimensional stability	ASTM F2199	Pass
Acoustic impact noise reduction IIC	ASTM E492-09	IIC = 68 dB 6" concrete slab drop ceiling
Static load	ASTM F970	Pass
Indentation	ASTM F1914	Pass
Phthalate free		Yes



## Iris Rigid Core - 20mil

	Standard	Result
Thickness		5.0mm
Size		7"x48"
Material		SPC
Wear Layer		20 mil
Surface Treatment		Nano Silver Coating
Surface Texture		Wood Emboss
Padding		1mm IXPE
Warranty	Commercial / Residential	15 year Commercial / Limited Lifetime Residential
Installation		Unilin Click
Beveled Edge		No
Smoke Density	ASTM E662-06	Pass <450
Static Coefficient of Friction	ASTM C1028	Pass
Chemical Resistance	ASTM F925	Pass
Resistance to light	ASTM F1515	Pass
Abrasion resistance	ASTM D4060	Pass
Dimensional stability	ASTM F2199	Pass
Acoustic impact noise reduction IIC	ASTM E492-09	IIC = 62 dB 6" concrete slab drop ceiling
Calculated Sound Transmission STC	ASTM E413-16	STC = 68 db
Static load	ASTM F970	Pass
Indentation	ASTM F1914	Pass
Phthalate free		Yes



						
	Pieces	Sf	Lbs	Boxes	Sf	Lbs
<b>Lotus</b>						
Lotus 7"x48"	14	32.70	27.06	85	2,779.50	2,300.00
<b>Lotus +</b>						
Lotus + 7"x48"	15	35	36.66	60	2,100.00	2,200.00
<b>Powell</b>						
Powell 7"x48"	18	44.18	45.80	55	2,429.90	2,519.00
<b>Fume</b>						
Fume 7"x48"	12	28.68	44.10	60	1,720.80	2,646.00
<b>Iris</b>						
Iris 7"x48"	10	23.90	42.03	60	1,434.00	2,522.00
<b>Apres</b>						
Apres 9"x60"	8	30.18	52.91	44	1,327.92	2,328.00

## INSTALLATION

LVP floors can be installed using several methods, depending on the type of product.

Here are some common installation methods:

### Click-lock Installation:

Some luxury vinyl plank floors feature a click-lock system that allows the planks to be securely snapped together without adhesive. This method offers additional locking mechanisms for a tighter fit. Click-lock installation is fast and easy and provides a strong, stable result. UNILIN Locking system. Angle / Angle

### Glue-down Installation:

Some luxury vinyl plank floors require adhesive to be applied to the subfloor before the planks are installed. This method provides a more permanent installation and may be preferred in areas with heavy foot traffic or moisture concerns. It can be more challenging and time-consuming than floating click installation, but it offers a more stable and secure result.

Regardless of the installation method you choose, it is important to prepare the subfloor properly before installing luxury vinyl plank floors. This may involve cleaning, leveling, and priming the subfloor to ensure a smooth and stable surface for installation.

## CARE

### EVERYDAY CLEANING OF EVOLUX

Low maintenance and easy cleaning are two of the key advantages of having Evolux on your floors. After installation, you should not clean the area or move furniture into it until the adhesive has completely dried.

Take these easy daily cleaning procedures to maintain the best-looking floor:

To get rid of dirt or grit, sweep your floors.

Mop with a pH neutral, fragrance free cleaner approved to use with vinyl floors. Routine maintenance with will

effectively kill and remove germs on the floor's surface.

Allow your floor to dry completely before walking on it.

Think about the following advice to maintain the best possible condition for your LVT flooring:

**Lift Furniture Entirely:** Always raise heavy furniture completely off the ground when moving it. Your LVT flooring may get dents and scratches from dragging furniture.

**Make Use of Furniture Pads** Underneath the legs of heavy furniture such as tables and chairs, place felt protection or furniture pads. By preventing furniture from coming into close touch with the floor, these pads lower the possibility of damage.

**Area Rugs and Mats:** Place area rugs or mats in places that get a lot of foot traffic. They serve as a buffer, preventing furniture movement and foot activity from scratching and scuffing your LVT.

**Clip Pet Nails:** Make sure your pets' nails are kept neat and tidy. The surface of LVT flooring might get scratches from puppy claws.

**Steer clear of abrasive cleaners:** Sturdy substances and abrasive cleaning equipment can damage LVT. For routine maintenance, use soft towels and mild cleaning solutions. Maintaining the longevity and beauty of your premium vinyl flooring just requires a small amount of maintenance!

## WARANTY

Product	Format	Residential	Commercial
Lotus	12mil Gluedown	Limited Lifetime	10 years
Lotus +	20mil Gluedown	Limited Lifetime	15 years
Powell	20mil Gluedown	Limited Lifetime	15 years
Fume	12mil SPC - floating/ click	Limited Lifetime	10 years
Iris	20mil SPC - floating/ click	Limited Lifetime	15 years
Apres	20mil Premium EIR SPC - floating/ click	Limited Lifetime	15 years

## WHAT THE WARRANTY COVERS?

**Manufacturing Defects:** EvoLux Floors ensures that the floating click product will be free from any manufacturing defects during the period of this warranty **Wear:** EvoLux Floors ensures that during the period of the warranty, wear due to normal foot traffic will not change the visual aspects of the product.



Apres Panna 9"x60"





---

## Locations

---

### Miami, FL.

Showroom & Distribution Center:  
11190 NW 25th St.  
Miami, FL 33172

### Chicago, IL.

Distribution Center:  
1330 Mark Street  
Elk Grove Village, IL 60007

### Houston, TX.

Showroom & Distribution Center:  
7100 Business Park Dr., Suite 250  
Houston, TX 77041

### Edison, NJ.

Showroom & Distribution Center:  
74 Carter Dr.  
Edison, NJ 08817

### Anaheim, CA.

Showroom & Distribution Center:  
1222 E. Howell Ave. Suite A.  
Anaheim, CA 92805

### Hayward, CA.

Showroom & Distribution Center:  
1857 Sabre St.  
Hayward, CA 94545

---

## Design Showrooms

---

### Miami, FL.

Design District:  
3886 Biscayne Blvd.  
Miami, FL 33137

### Chicago, IL.

Downtown Showroom:  
215 W Illinois St  
Chicago, IL 60654

### Manhattan, NY.

Downtown Showroom:  
19 W 21st Street, Suite #603  
New York, NY 10010

---

## Coming Soon

---

### Atlanta, Georgia

Showroom & Distribution Center:  
5775 Commerce Boulevard  
Alpharetta, GA 30004

The Roca logo features the word "Roca" in a bold, white, sans-serif font. Below the text is a stylized white graphic element consisting of a horizontal line that curves upwards at both ends, resembling a wave or a decorative underline.

Roca Tile USA Inc.

11190 NW 25th St.  
Miami, FL 33172

(800) 321 0684

[www.rocatileusa.com](http://www.rocatileusa.com)