



Mood



Mood Black



Mood Light Gray



Mood Dark Gray

Mood


Color Body Porcelain



36"x36" R 24"x48" R 24"x24" R 12"x24" R
90x90 cm 60x120 cm 60x60 cm 30x60 cm



Snow



36"x36" R
ARFLD05-36




24"x48" R
ARFLD01-2448




24"x24" R
ARFLD05-24



12"x24" R
ARFLD05-1224

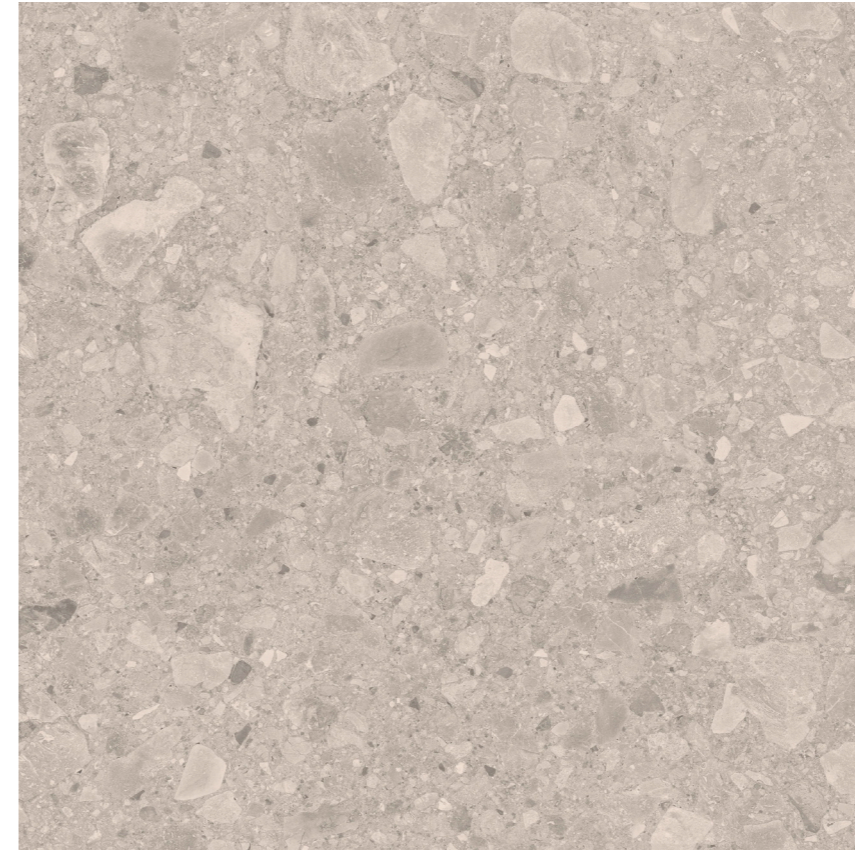

Beige



36"x36" R
ARFLD02-36



24"x48" R
ARFLD02-2448



24"x24" R
ARFLD02-24



12"x24" R
ARFLD02-1224



White



36"x36" R
ARFLD01-36




24"x48" R
ARFLD01-2448



24"x24" R
ARFLD01-24



12"x24" R
ARFLD01-1224

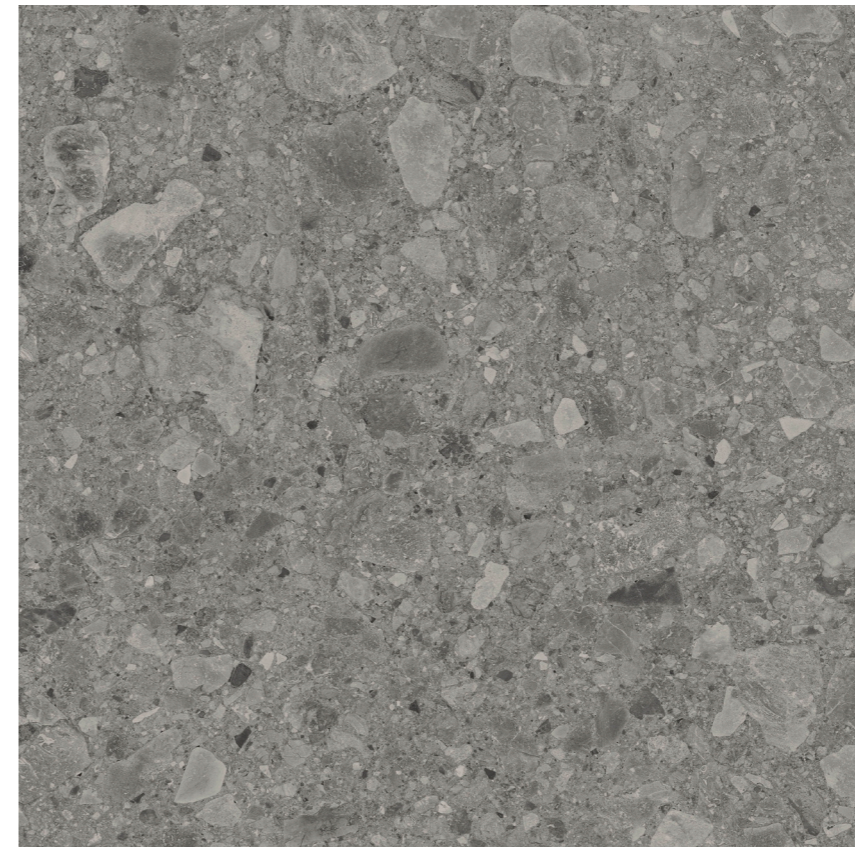

Light Gray



36"x36" R
ARFLD04-36



24"x48" R
ARFLD04-2448




24"x24" R
ARFLD04-24




12"x24" R
ARFLD04-1224

Mood


Color Body Porcelain



36"x36" R 24"x48" R 24"x24" R 12"x24" R
 90x90 cm 60x120 cm 60x60 cm 30x60 cm

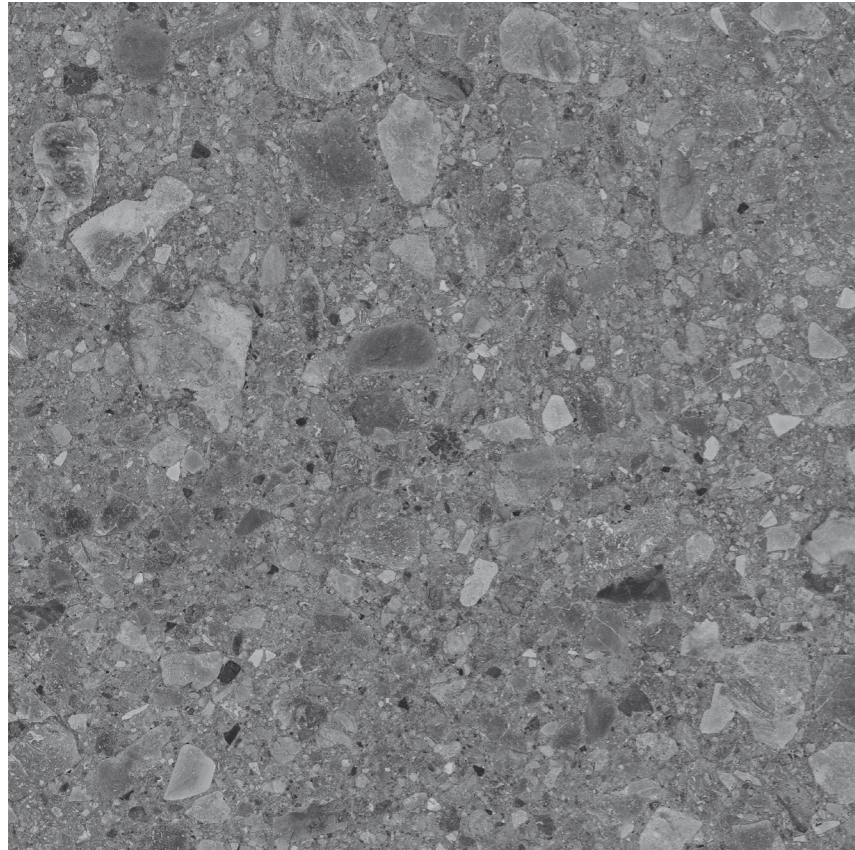

Dark Gray



36"x36" R
ARFLD04-36




24"x48" R
ARFLD06-2448




24"x24" R
ARFLD06-24



12"x24" R
ARFLD06-1224

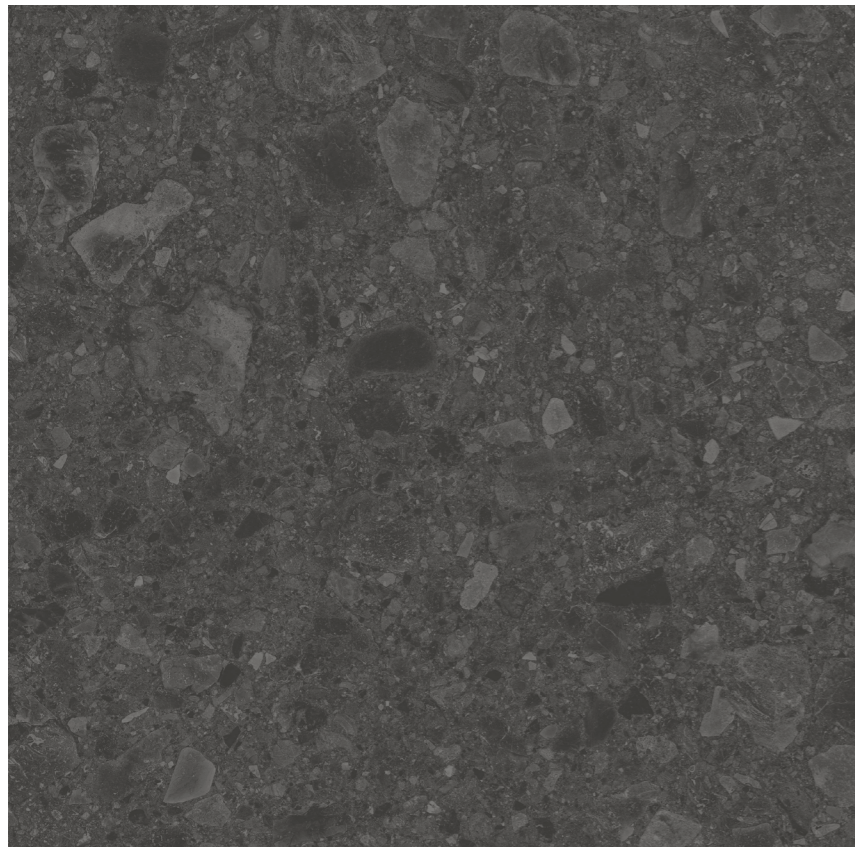

Black



36"x36" R
ARFLD03-36



24"x48" R
ARFLD03-2448



24"x24" R
ARFLD02-24



12"x24" R
ARFLD03-1224

Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	ISO-10545/3	<=0.5
Break Strength	ISO-10545/4	290
Scratch Hardness	EN-101	9
Chemical Resistance	ISO-10545/13	Unaffected
Frost Resistance	ISO-10545/12	Resistant
Group	ISO-10545/7	4
Dynamic Coefficient of Friction (DCOF)	A137.1	>=0.42
PEI	C1027	4
Shade and Texture Rating	CTDA "V"	V3
Facial Dimensions	ISO-10545/2	Pass
Range of Thickness	ISO-10545/2	Pass
Warpage	ISO-10545/2	Pass
Wedging	ISO-10545/2	Pass

Packaging Info

Size	SF per carton	PC per carton
12"x24" R	11.62	6
24"x24" R	11.62	3
24"x48" R	15.49	2
36"x36" R	17.43	2