



Black & Light
Calacatta

DUNE
UNIQUE MATTERS

Roca

Black & Light Calacatta

We reinvent the classic Black&White concept, offering new nuances and designs, in a creative exercise that renews marble from a contemporary perspective. As a result, the new Calacatta series, with an unmistakable hallmark, allows you to create both classic and contemporary environments. The Black & Light Calacatta series is characterised by its high combination possibilities, both between its two versions and between its different formats and finishes.



Black Calacatta 35.4"x35.4"


Black & Light Calacatta

Glazed Porcelain

10mm  **35.4"x35.4"**
90x90 cm



Black Calacatta



35.4"x35.4"
188632

Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM
Dimensions	ISO 10545-2	± 0.6%
Water Absorption	ISO 10545-3	E≤0.5%
Resistance to Surface Abrasion	ISO 10545-7	Class 3
Flatness	ISO 10545-2	± 0.5%
Crazing Resistance	ISO 10545-11	Accomplish
Resistance to Stains	ISO 10545-14	5
Chemical Resistance Swimmingpool	ISO 10545-13	GHB
Slip Resistance	41901 EX	Class 0
Breaking Strength	ISO 10545-4:9	≥350 lbf
Frost Resistance	ISO 10545-12	Accomplish
Resistance to Thermal Shock	ISO 10545-9	Accomplish



Packaging Info

Size	SF per carton	PC per carton	BX per pallet
35.4"x35.4"	13.35	1	80


Black & Light Calacatta

Glazed Porcelain

9mm  **10.6"x11" Mosaic**
27x28 cm




Mosaico Black & Light Calacatta



10.6"x11"
188714

Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM
Dimensions	ISO 10545-2	± 0.5%
Flatness	ISO 10545-2	± 0.5%
Crazing Resistance	ISO 10545-11	Accomplish
Resistance to Stains	ISO 10545-14	5
Chemical Resistance Swimmingpool	ISO 10545-13	GA
Breaking Strength	ISO 10545-4:9	>=350 lbf
Resistance to Thermal Shock	ISO 10545-9	Accomplish

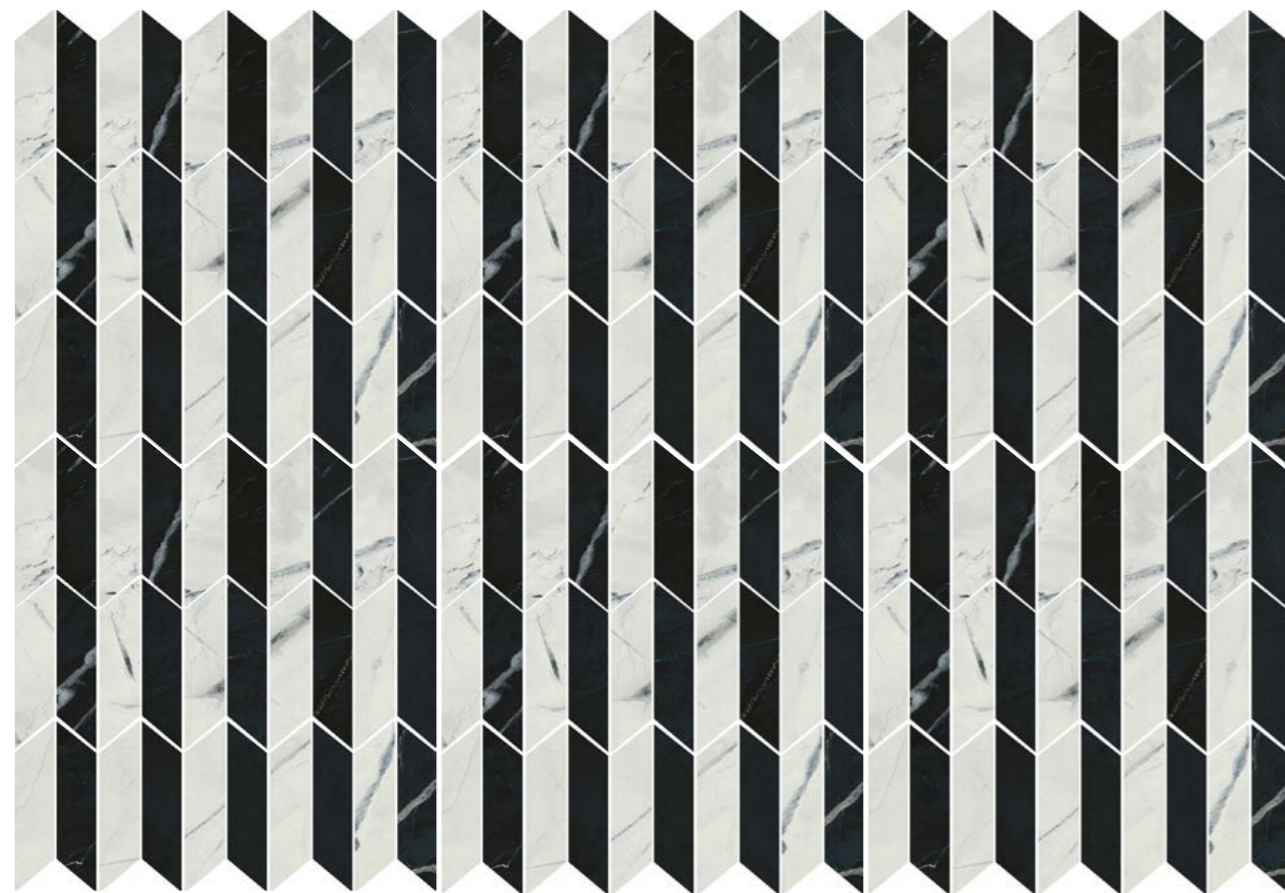


Packaging Info

Size	SF per carton	PC per carton	BX per pallet
10.6"x11"	137.35	10	54


Black & Light Calacatta

Glazed Porcelain

10mm  **11.2"x10" Mosaic**
28.5x25.5 cm

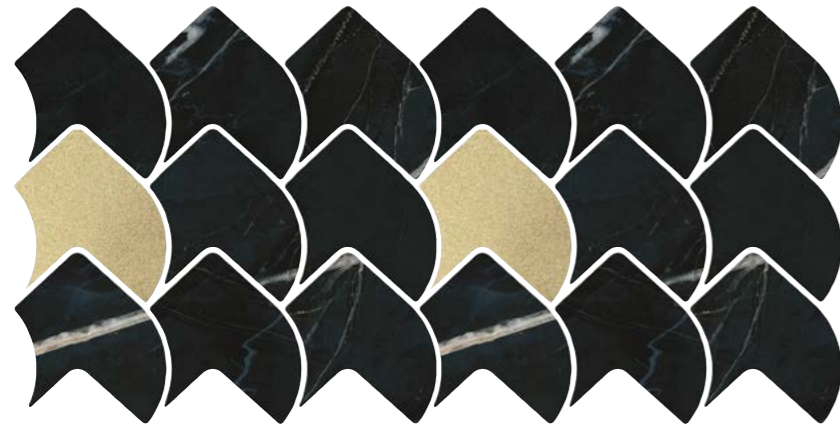

Mosaico Black Calacatta



11.2"x10"
188717



Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	ISO 10545-3	E<=0.5%
Flatness	ISO 10545-2	± 0.5%
Crazing Resistance	ISO 10545-11	Accomplish
Resistance to Stains	ISO 10545-14	5
Chemical Resistance Swimmingpool	ISO 10545-13	GA
Slip Resistance	41901 EX	Class 0
Breaking Strength	ISO 10545-4:9	>=350 lbf
Resistance to Thermal Shock	ISO 10545-9	Accomplish

Packaging Info

Size	SF per carton	PC per carton	BX per pallet
11.2"x10"	122.49	6	48