



Roca

Legend




Legend

Legend reproduces the design of English stone on different faces with a great deal of movement, unified under the same shade. Creating differential environments through its gentle contrasts, Legend evokes feelings of balance and serenity.

Legend Blanco 12"x24"

Glazed & Polished Porcelain


 24"x48" R - 12"x24" R - 12"x24" - 8"x9" Hexagon


Legend

Glazed & Polished Porcelain

7-10 mm |  | 12"x24" R
30x60 cm



Blanco



12"x24" UP
UFLG011-1224



12"x24" R PO
UFLGPO100-1224



13"x13" UP Mosaic
UFLG011-13M



3"x12" UP Bullnose
UFLG011-S43C9



Arena



12"x24" UP
UFLG371-1224




12"x24" R PO
UFLGPO371-1224



13"x13" UP Mosaic
UFLG371-13M




3"x12" UP Bullnose
UFLG371-S43C9

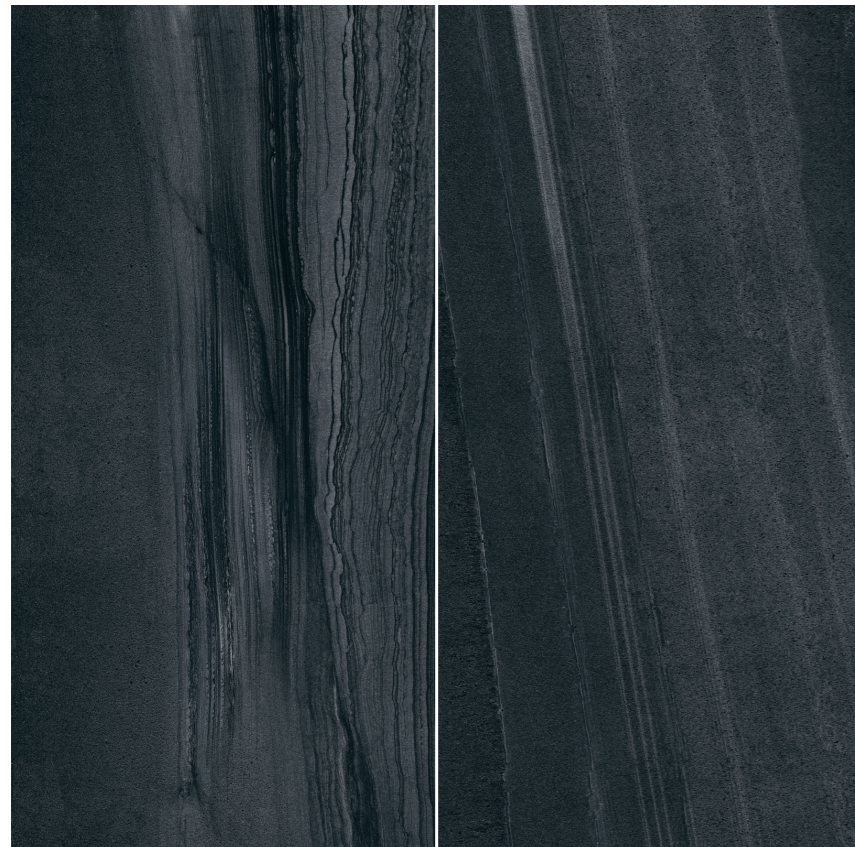

Graphite



12"x24" UP
UFLG101-1224



12"x24" PO
UFLGPO101-1224



13"x13" UP Mosaic
UFLG101-13M



3"x12" UP Bullnose
UFLG101-S43C9



Vison



12"x24" UP
UFLG141-1224



13"x13" UP Mosaic
UFLG141-13M



3"x12" UP Bullnose
UFLG141-S43C9

Legend

Glazed & Polished Porcelain

Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM	
		Polished	Unpolished
Water Absorption	C373	<=0.5%	<=0.5%*
Break Strength	C648	Min 335	Min 250
Scratch Hardness	MOH's Scale	3	5
Chemical Resistance	C650	Unaffected	Unaffected
Frost Resistance	C1026	Resistant	Resistant
Group	See FAQ's	3	4*
Deep Abrasion - Unglazed Tiles	C1243	Pass	-
PEI Glazed Tiles	C1027	4	4
Minimum Bond Strength (PSI)	C482	165	165
Dynamic Coefficient of Friction (DCOF)	A137.1	<=0.40	<=0.42
Shade and Texture Rating	CTDA "V"	V4	V4
Facial Dimensions	C499	Pass	Pass
Range of Thickness	C499	Pass	Pass
Warping	C485	Pass	Pass
Wedging	C502	Pass	Pass

*Water absorption is <3 for the 8"x9" Hexagon

*Group if 3 for the 8"9 Hexagon

Packaging Info

Size	SF per carton	PC per carton
12"x24" UP	20.34	10
12"x24" PO	18.94	10
24"x48" UP	15.5	2
24"x48" PO	22.96	3
13"x13" Mosaic	13.5	11
3"x12" Bullnose	5.89	24
8"x9" Hexagon	10.36	28