



**Calacatta**

**DUNE**  
UNIQUE MATTERS

**Roca**



# Calacatta

Calacatta a collection of white marble products with grayish veins that will make any space a stylish and appealing setting. Discover our new Superwhite floor tile models with a whiter appearance that is perfect for lifting any room.

Calacatta Lux 11.8"x35.4"



Calacatta Superwhite 35.4"x35.4"



Calacatta Superwhite 23.6"x23.6"



Calacatta Superwhite 23.6"x23.6"

# Calacatta

Ceramic Wall & Glazed Porcelain

11mm  **11.8"x35.4"**  
30x90 cm



## Lux



11.8"x35.4"  
187521N



## Carezza Lux



11.8"x35.4"  
187590N

## Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM
Dimensions	ISO 10545-2	± 0.5%
Water Absorption	ISO 10545-3	E>10%
Chemical Resistance	ISO 10545-13	GA
Flatness	ISO 10545-2	± 0.5%
Crazing Resistance	ISO 10545-11	Accomplish
Resistance to Stains	ISO 10545-14	5
Chemical Resistance Swimmingpool	ISO 10545-13	GA
Breaking Strength	ISO 10545-4:9	≥125 lbf
Frost Resistance	ISO 10545-12	N/A
Resistance to Thermal Shock	ISO 10545-9	Accomplish

## Packaging Info

Size	SF per carton	PC per carton	BX per pallet
11.8"x35.4" (Lux)	39.8	4	48
11.8"x35.4" (Carezza Lux)	39.8	4	22




Calacatta Carezza Lux 11.8"x35.4"

# Calacatta

Ceramic Wall & Glazed Porcelain

11mm  **11.8"x11.8"**  
30x90 cm

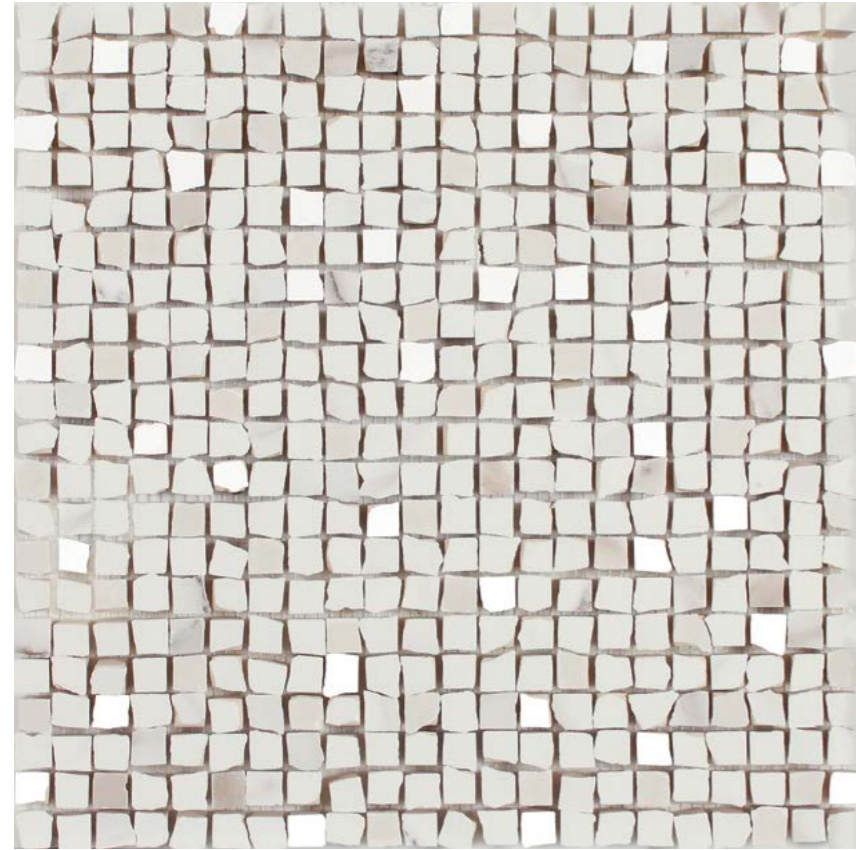

## Mosaico Lux



**11.8"x11.8"**  
187585

## Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM
Dimensions	ISO 10545-2	± 0.5%
Water Absorption	ISO 10545-3	E>10%
Chemical Resistance	ISO 10545-13	GLA
Flatness	ISO 10545-2	± 0.5%
Crazing Resistance	ISO 10545-11	Accomplish
Resistance to Stains	ISO 10545-14	5
Chemical Resistance Swimmingpool	ISO 10545-13	GA
Frost Resistance	ISO 10545-12	Accomplish
Resistance to Thermal Shock	ISO 10545-9	Accomplish



Calacatta Mosaico Lux 11.8"x11.8"

## Packaging Info

Size	SF per carton	PC per carton	BX per pallet
11.8"x11.8"	119.58	7	64


# Calacatta

Ceramic Wall & Glazed Porcelain


10mm  **35.4"x35.4"** **23.6"x23.6"**  
90x90 cm 60x60 cm



## Superwhite



35.4"x35.4"  
188204



23.6"x23.6"  
188206

## Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM
Dimensions	ISO 10545-2	± 0.6%
Water Absorption	ISO 10545-3	E<=0.5%
Resistance to Surface Abrasion	ISO 10545-7	Class 4
Flatness	ISO 10545-2	± 0.5%
Crazing Resistance	ISO 10545-11	Accomplish
Resistance to Stains	ISO 10545-14	5
Slip Resistance	41901 EX	Class 0
Breaking Strength	ISO 10545-4:9	>=350lbf
Frost Resistance	ISO 10545-12	Accomplish
Resistance to Thermal Shock	ISO 10545-9	Accomplish

## Packaging Info

Size	SF per carton	PC per carton	BX per pallet
34.4"x35.4"	13.34	1	80
23.6"x23.6"	29.92	3	40




Calacatta Superwhite 35.4"x35.4"


# Calacatta

Ceramic Wall & Glazed Porcelain


9-10mm  **35.4"x35.4"** **23.6"x23.6"**  
90x90 cm 60x60 cm

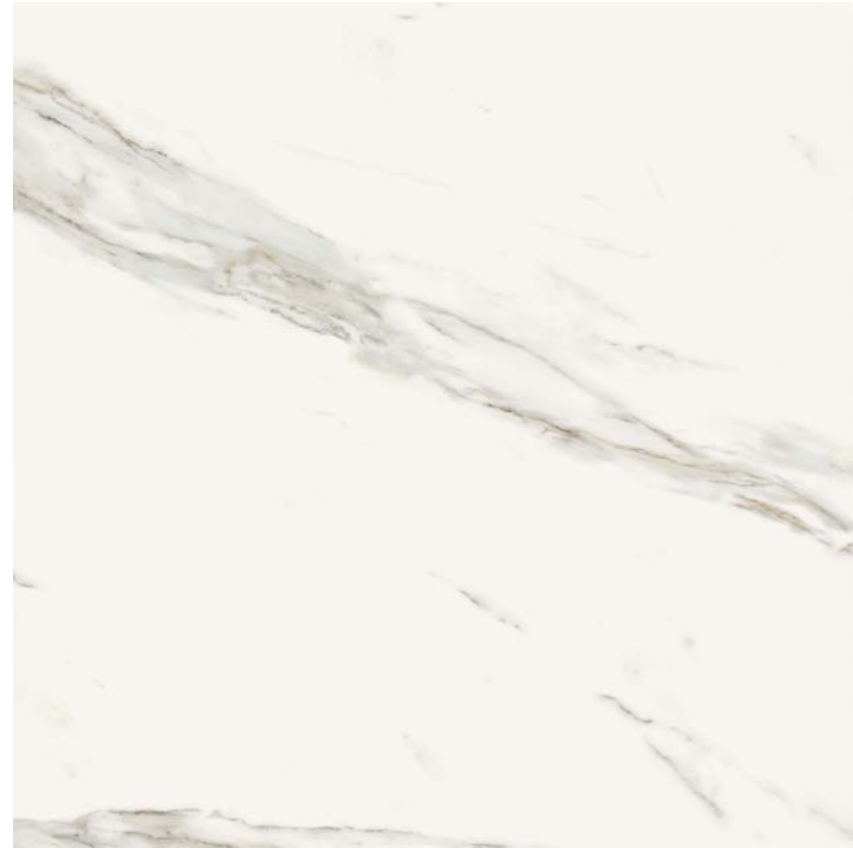

## Superwhite Satin



35.4"x35.4"  
188312



23.6"x23.6"  
188200



Calacatta Superwhite Satin 23.6"x23.6"

## Technical Specifications 35.4"x35.4"

CHARACTERISTICS	STANDARD	DECLARED ASTM
Dimensions	ISO 10545-2	± 0.6%
Water Absorption	ISO 10545-3	E<=0.5%
Resistance to Surface Abrasion	ISO 10545-7	Class 4
Flatness	ISO 10545-2	± 0.5%
Crazing Resistance	ISO 10545-11	Accomplish
Resistance to Stains	ISO 10545-14	5
Slip Resistance	41901 EX	Class 0
Breaking Strength	ISO 10545-4:9	>=350lbf
Frost Resistance	ISO 10545-12	Accomplish
Resistance to Thermal Shock	ISO 10545-9	Accomplish

## Technical Specifications 23.6"x23.6"

CHARACTERISTICS	STANDARD	DECLARED ASTM
Dimensions	ISO 10545-2	± 0.6%
Water Absorption	ISO 10545-3	E<=0.5%
Resistance to Surface Abrasion	ISO 10545-7	Class 4
Chemical Resistance	ISO 10545-13	GA
Flatness	ISO 10545-2	± 0.5%
Crazing Resistance	ISO 10545-11	Accomplish
Resistance to Stains	ISO 10545-14	5
Chemical Resistance Swimmingpool	ISO 10545-13	GA
Slip Resistance	41901 EX	Class 0
Breaking Strength	ISO 10545-4:9	>=350lbf
Frost Resistance	ISO 10545-12	Accomplish
Resistance to Thermal Shock	ISO 10545-9	Accomplish

## Packaging Info

Size	SF per carton	PC per carton	BX per pallet
35.4"x 35.4"	13.34	1	80
23.6"x23.6"	29.92	3	48

# Calacatta

Ceramic Wall & Glazed Porcelain

10mm  **23.6"x23.6"**  
60x60 cm



Superwhite



23.6"x47.2"  
188223

## Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM
Dimensions	ISO 10545-2	± 0.5%
Water Absorption	ISO 10545-3	E≤0.5%
Resistance to Surface Abrasion	ISO 10545-7	Class 2
Chemical Resistance	ISO 10545-13	GLB
Flatness	ISO 10545-2	± 0.5%
Crazing Resistance	ISO 10545-11	Accomplish
Resistance to Stains	ISO 10545-14	5
Slip Resistance	41901 EX	Class 0
Breaking Strength	ISO 10545-4:9	≥350lbf
Frost Resistance	ISO 10545-12	Accomplish



Calacatta Superwhite Satin 23.6"x47.2"

## Packaging Info

Size	SF per carton	PC per carton	BX per pallet
23.6"x47.2"	14.96	2	30