



Zement

DUNE
UNIQUE MATTERS

Roca

Zement

Character and design come together to propose a cement with a lot of personality. Available in three soft, neutral, and complementary colors, and in three formats, Zement stands out for the richness and detail of its texture.



Zement Grey 35"x35" & Exa Grey 8.5"x9.8"



Zement Gold 23.6"x47.2"



Zement White 23.6"x47.2" & Exa White 8.6"x9.8"



Zement Ivory 23.6"x47.2"


Zement

Glazed Porcelain

7mm  **35.4"x35.4"**
90x90 cm




White



35"x35"
188905




Grey



35"x35"
188906



Ivory



35"x35"
188907

Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM
Dimensions	ISO 10545-2	± 0.6%
Water Absorption	ISO 10545-3	E≤0.5%
Resistance to Surface Abrasion	ISO 10545-7	Class 5
Chemical Resistance	ISO 10545-13	GLA
Scratch Hardness	67-101	5
Resistance to Stains	ISO 10545-14	5
Chemical Resistance Swimmingpool	ISO 10545-13	GA
Slip Resistance	16165 Anexo C	Class 1
Breaking Strength	ISO 10545-4:9	≥350 lbf
Frost Resistance	ISO 10545-12	Accomplish
Slip Resistance (DCOF)	ANSI A326.3	>0.42

Packaging Information

Size	SF per carton	PC per carton	BX per pallet
35.4"x35.4"	13.34	3	40


Zement

Glazed Porcelain

7mm  **23.6"x47.2"**
60x120 cm



White



23.6"x47.2"
188908

7mm  **23.6"x47.2"**
60x120 cm



Silver



23.6"x47.2"
188984



Grey



23.6"x47.2"
188909



Gold



23.6"x47.2"
188983



Ivory



23.6"x47.2"
188910

Zement

Glazed Porcelain

Technical Specifications (White, Grey & Ivory)

CHARACTERISTICS	STANDARD	DECLARED ASTM
Dimensions	ISO 10545-2	± 0.6%
Water Absorption	ISO 10545-3	E≤0.5%
Resistance to Surface Abrasion	ISO 10545-7	Class 5
Chemical Resistance	ISO 10545-13	GLA
Scratch Hardness	67-101	5
Resistance to Stains	ISO 10545-14	5
Chemical Resistance Swimmingpool	ISO 10545-13	GA
Slip Resistance	16165 Anexo C	Class 1
Breaking Strength	ISO 10545-4:9	≥350 lbf
Frost Resistance	ISO 10545-12	Accomplish
Slip Resistance (DCOF)	ANSI A326.3	>0.42

Technical Specifications (Silver & Gold)

CHARACTERISTICS	STANDARD	DECLARED ASTM
Dimensions	ISO 10545-2	± 0.6%
Water Absorption	ISO 10545-3	E≤0.5%
Breaking Strength	ISO 10545-4:9	≥350 lbf
Frost Resistance	ISO 10545-12	Accomplish

Packaging Information

Size	SF per carton	PC per carton	BX per pallet
35.4"x35.4"	14.96	3	30

Packaging Information

Size	SF per carton	PC per carton	BX per pallet
23.6"x47.2"	14.96	2	20


Zement

Glazed Porcelain


8mm  **8.5"x9.8"**
21.5x25 cm



Exa White



8.5"x9.8"
188952

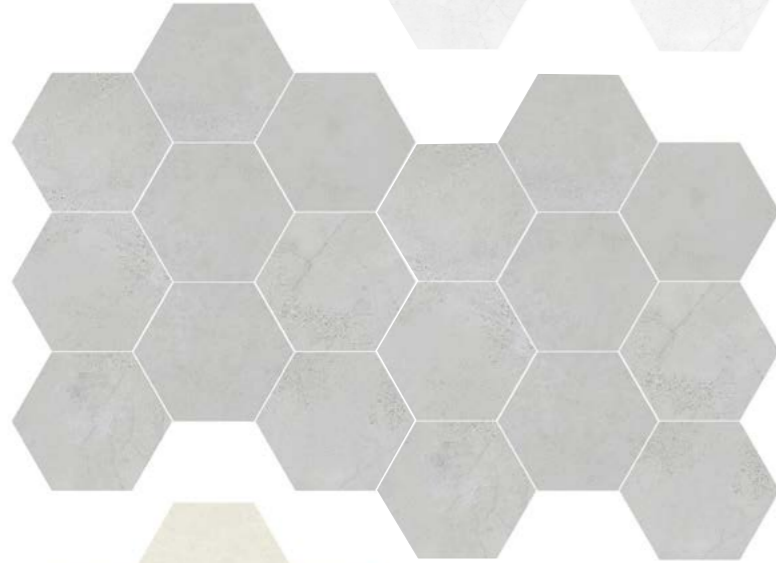


Exa Grey



8.5"x9.8"
188951




Exa Ivory



8.5"x9.8"
188953



Exa Copper



8.5"x9.8"
188981



Exa Mercury



8.5"x9.8"
188980

Technical Specifications (White, Grey & Ivory)

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	ISO 10545-3	E<=0.5%
Resistance to Surface Abrasion	ISO 10545-7	Class 3
Scratch Hardness	67-101	6
Crazing Resistance	ISO 10545-11	Accomplish
Resistance to Stains	ISO 10545-14	5
Chemical Resistance Swimmingpool	ISO 10545-13	GA
Slip Resistance	16165 Anexo C	Class 2
Breaking Strength	ISO 10545-4:9	>=350 lbf
Frost Resistance	ISO 10545-12	Accomplish
Slip Resistance (DCOF)	ANSI A326.3	>0.42

Technical Specifications (Copper & Mercury)

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	ISO 10545-3	E<=0.5%
Resistance to Surface Abrasion	ISO 10545-7	Class 3
Scratch Hardness	67-101	6
Crazing Resistance	ISO 10545-11	Accomplish
Resistance to Stains	ISO 10545-14	5
Chemical Resistance Swimmingpool	ISO 10545-13	GA
Slip Resistance	16165 Anexo C	Class 0
Breaking Strength	ISO 10545-4:9	>=350 lbf
Frost Resistance	ISO 10545-12	Accomplish

Packaging Information

Size	SF per carton	PC per carton	BX per pallet
8.5"x9.8"	265.76	27	64

Packaging Information

Size	SF per carton	PC per carton	BX per pallet
8.5"x9.8"	265.76	27	64