



**Amazonite**

**DUNE**  
UNIQUE MATTERS

**Roca**



# Amazonite

Designed to create atmospheres reminiscent of exotic landscapes, Amazonite is a versatile collection, designed to decorate any room in the home. While in living rooms and kitchens it takes absolute prominence, these marble effect tiles are capable of transforming bathrooms and elevating the room to another dimension. In this sense, in addition to the pieces in green, the series also proposes a calmer version in grey, called Amazonite Pearl. This variation is designed for those who shy away from superfluous details and seek to create a project with an elegant interior design.



Amazonite Pearl 35.4"x35.4"





Amazonite 9.1"x9.8"



Amazonite Pearl 35.4"x35.4"




Amazonite 35.4"x35.4" & Amazonite Pearl 35.4"x35.4"




# Amazonite

Glazed Porcelain

10mm **35.4"x35.4"**  
90x90 cm

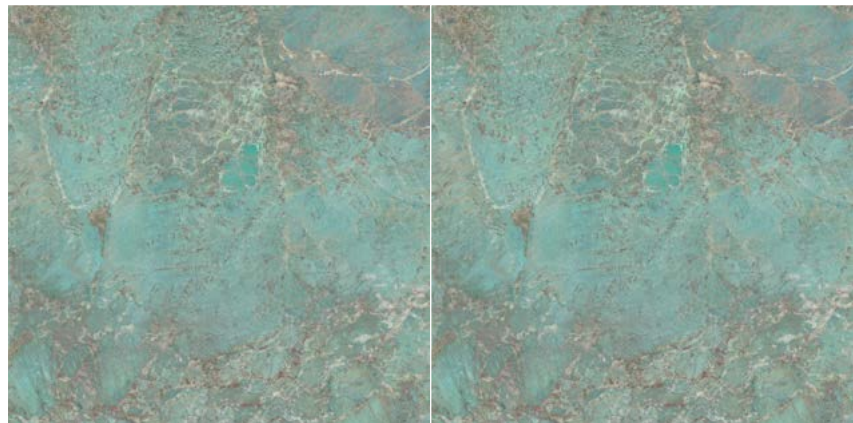

Amazonite



35.4"x35.4"  
188634

9mm **23.6"x47.2"** **10.6"x9.6"** **9.1"x9.8"**  
60x120 cm 27x24.5 cm 23x25 cm




Manila




23.6"x47.2"  
188713



Pearl



35.4"x35.4"  
188635

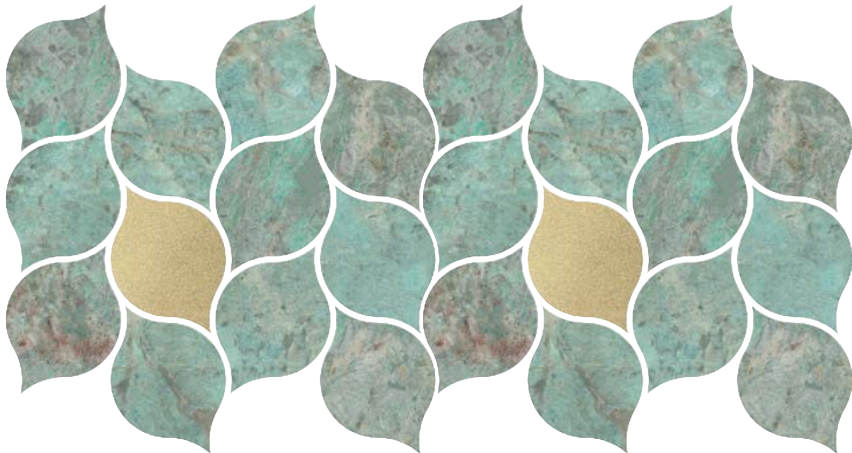


Mosaico Leaves



10.6"x9.6"  
188718



Pearl Satin



35.4"x35.4"  
188638



Amazonite



9.1"x9.8"  
188716

# Amazonite

Glazed Porcelain

## Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM
Dimensions	ISO 10545-2	± 0.6%
Water Absorption	ISO 10545-3	E<=0.5%
Resistance to Surface Abrasion	ISO 10545-7	Class 3
Flatness	ISO 10545-2	± 0.5%
Crazing Resistance	ISO 10545-11	Accomplish
Resistance to Stains	ISO 10545-14	5
Chemical Resistance Swimmingpool	ISO 10545-13	GHB
Slip Resistance	41901 EX	Class 0
Breaking Strength	ISO 10545-4:9	>=350 lbf
Frost Resistance	ISO 10545-12	Accomplish
Resistance to Thermal Shock	ISO 10545-9	Accomplish

## Technical Specifications (Mosaico Leaves & Mosaico Diamonds)

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	ISO 10545-3	E<=0.5%
Flatness	ISO 10545-2	± 0.5%
Crazing Resistance	ISO 10545-11	Accomplish
Resistance to Stains	ISO 10545-14	5
Chemical Resistance Swimmingpool	ISO 10545-13	GA
Breaking Strength	ISO 10545-4:9	>=350 lbf
Frost Resistance	ISO 10545-12	Accomplish
Resistance to Thermal Shock	ISO 10545-9	Accomplish

## Technical Specifications (Pearl Satin)

CHARACTERISTICS	STANDARD	DECLARED ASTM
Dimensions	ISO 10545-2	± 0.6%
Water Absorption	ISO 10545-3	E<=0.5%
Resistance to Surface Abrasion	ISO 10545-7	Class 4
Flatness	ISO 10545-2	± 0.5%
Crazing Resistance	ISO 10545-11	Accomplish
Resistance to Stains	ISO 10545-14	5
Chemical Resistance Swimmingpool	ISO 10545-13	GHB
Slip Resistance	41901 EX	Class 0
Breaking Strength	ISO 10545-4:9	>=350 lbf
Frost Resistance	ISO 10545-12	Accomplish
Resistance to Thermal Shock	ISO 10545-9	Accomplish

## Packaging Information

Size	SF per carton	PC per carton	BX per pallet
9.1"x9.8"	187.18	10	54
10.6"x9.6"	136.49	6	48
23.6"x47.2"	14.96	2	20
35.4"x35.4"	13.34	1	80

## Technical Specifications (Manila)

CHARACTERISTICS	STANDARD	DECLARED ASTM
Dimensions	ISO 10545-2	± 0.6%
Water Absorption	ISO 10545-3	E<=0.5%
Flatness	ISO 10545-2	± 0.5%
Crazing Resistance	ISO 10545-11	Accomplish
Breaking Strength	ISO 10545-4:9	>=350 lbf
Frost Resistance	ISO 10545-12	Accomplish
Resistance to Thermal Shock	ISO 10545-9	Accomplish