



**Roca**

**Jewels**

# Jewels

The brilliance of marble is captured in this stunning tile collection, which radiates sophistication and elegance. Whether you prefer a polished or matte finish, each tile features a distinct marble-inspired design that replicates the natural beauty and uniqueness of these stones. With a vast array of options to choose from, this collection caters to every taste and style.

## Glazed Porcelain

📏 24"x48" R - 12"x24" R

Vince White 24"x48"



Etienne 12"x24" R




Laurent White 24"x48" R



Mattia White 12"x24" R

# Jewels

Glazed Porcelain



24"x48" R 12"x24"  
60x120 cm 30x60 cm



## Etienne Cream



24"x48" R PO



24"x48" R UP



12"x24" R PO



12"x24" R UP



## Etienne Light Gray



24"x48" R PO



24"x48" R UP



12"x24" R PO



12"x24" R UP



## Etienne Gray




24"x48" R PO



24"x48" R UP



12"x24" R PO



12"x24" R UP



Etienne Gray 12"x24" R

# Jewels

Glazed Porcelain

6.5-8.0 mm |   **P** **M**   | **24"x48" R** **12"x24"**  
60x120 cm 30x60 cm



## Laurent White



24"x48" R PO



12"x24" R PO



12"x24" R UP



## Mattia White



24"x48" R PO



24"x48" R UP



12"x24" R PO



12"x24" R UP



Laurent White 24"x48" R



Mattia White 12"x24" R

# Jewels

Glazed Porcelain



24"x48" R 12"x24"  
60x120 cm 30x60 cm




### Maurice Black




24"x48" R PO



### Therry Cream



12"x24" R PO



12"x24" R UP



Maurice Black 24"x48" R



Therry Cream 12"x24" R


# Jewels

Glazed Porcelain


**24"x48" R** **12"x24"**  
 60x120 cm 30x60 cm



## Vince White

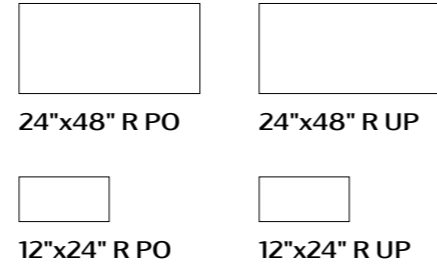

## Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM	
		Polished	Unpolished
Water Absorption	C373	<=0.5%	<=0.5%
Break Strength	C648	Min. 275	Min. 275
Chemical Resistance	C650	Class A (Resist) <sup>1</sup>	Class A (Resist) <sup>1</sup>
Stain Resistance	C1378	Class A	Class A
Frost Resistance	C1026	Resistant	Resistant
Thermal Shock Resistance	C484	Resistant	Resistant
Crazing Resistance	C424	Resistant	Resistant
Group	See FAQ's	4	4
PEI- Glazed Tiles	C1027	PEI (III)	PEI (III)
Dynamic Coefficient of Friction (DCOF)	A326.3	<0.42	>=0.42
Shade and Texture Rating	CTDA "V"	V2-V3	V2-V3
Facial Dimensions	C499	Pass	Pass
Range of Thickness	C499	Pass	Pass
Warpage	C485	Pass	Pass
Wedging	C502	Pass	Pass



Vince White 24"x48" R

## Packaging Information

Size	SF per carton	PC per carton	BX per pallet
12"x24" R	9.69	5	64
24"x48" R	23.25	3	27
24"x48" R (Maurice)	15.50	2	29