



**Roca**

**Pro**

# Pro

Basic and essential. This sums up the Pro series, which comes in an array of neutral colors that are practical to use and easy to maintain in any type of space.



Pro Sand 35"x35" R PO

## Glazed & Polished Porcelain

◇ 35"x35" R - 24"x48" R - 24"x24" R - 12"x24" R - 3x12"




Pro Cement 24"x24" R UP



Pro Ivory 24"x24" R UP


# Pro

Glazed & Polished Porcelain


7-9 mm |  35"x35" 24"x48" R 24"x24" R 12"x24" R 21"x21" 3"x12"  
90x90 cm 60x120 cm 60x60 cm 30x60 cm 54x54 cm 7.5x30 cm



## Ivory



35"x35" R PO & UP



24"x48" R PO & UP



24"x24" R PO & UP



12"x24" R PO & UP



21"x21" UP




13"x13" UP Mosaic



3"x12" Bullnose




## Sand



35"x35" R PO & UP



24"x48" R PO & UP



24"x24" R PO & UP



12"x24" R PO & UP



## Nude



35"x35" R PO & UP



24"x48" R UP



24"x24" R PO & UP



12"x24" R PO & UP



21"x21" UP




13"x13" UP Mosaic




3"x12" UP



3"x12" Bullnose

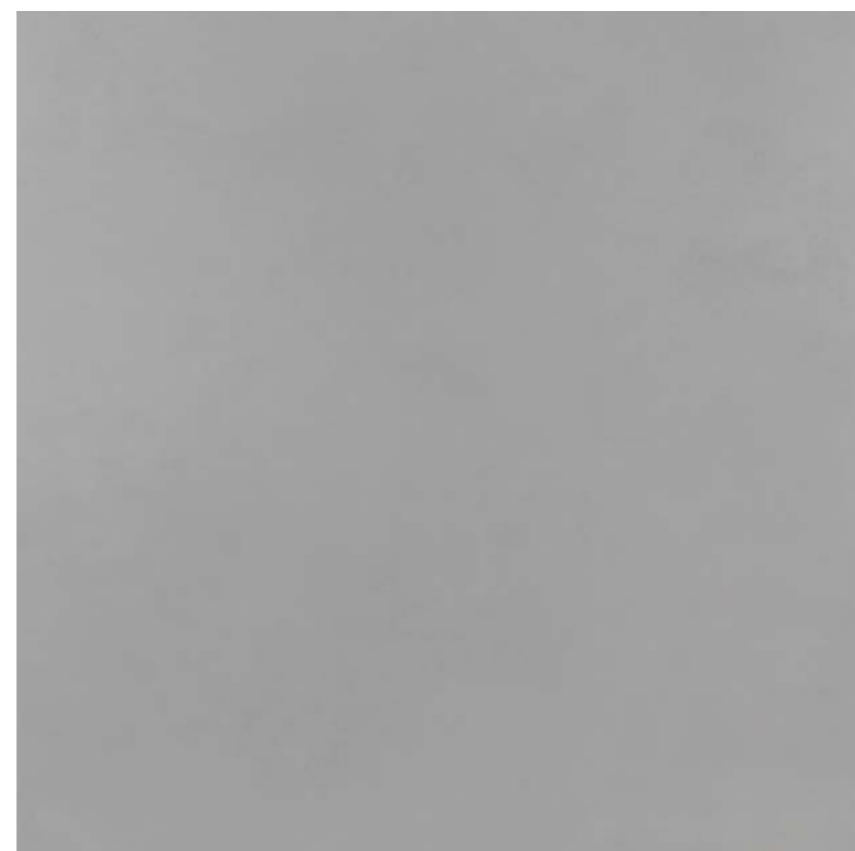

## Cement



35"x35" R PO & UP



24"x48" R PO & UP



24"x24" R PO & UP



12"x24" R PO & UP



21"x21" UP




13"x13" UP Mosaic



3"x12" Bullnose


# Pro

Glazed & Polished Porcelain


7-9 mm |  | 35"x35" 24"x48" R 24"x24" R 12"x24" R 21"x21" 3"x12"  
90x90 cm 60x120 cm 60x60 cm 30x60 cm 54x54 cm 7.5x30 cm



## Concrete

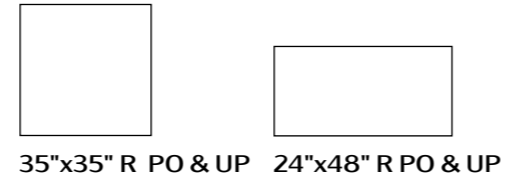

35"x35" R PO & UP 24"x48" R PO & UP

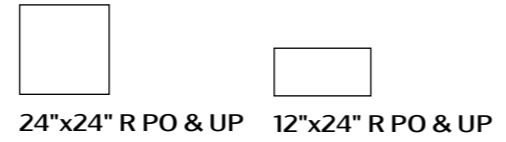

24"x24" R PO & UP 12"x24" R PO & UP



13"x13" UP Mosaic 3"x12" UP



3"x12" Bullnose



Pro Concrete 24"x48" R UP

# Porcelain Mosaics - Cut

## Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM	
		Polished	Unpolished
Water Absorption	C373	<=0.5%	<=0.5%
Break Strength	C648	Min. 335	Min. 335
Scratch Hardness	MOH's Scale	3	5
Chemical Resistance	C650	Unaffected	Unaffected
Frost Resistance	C1026	Resistant	Resistant
Group	See FAQ's	3	4
Deep Abrasion - Unglazed Tiles	C1243	Pass	Pass
PEI- Glazed Tiles***	C1027	3	-
Minimum Bond Strength (PSI)	C482	165	165
Dynamic Coefficient of Friction (DCOF)	A137.1	<=0.40	>=0.42
Shade and Texture Rating	CTDA "V"	V3	V3
Facial Dimensions	C499	Pass	Pass
Range of Thickness	C499	Pass	Pass
Warpage	C485	Pass	Pass
Wedging	C502	Pass	Pass

## Packaging Info

Size	SF per carton	PC per carton	BX per pallet
3"x12"	10.98	46	62
12"x24" R	18.94	10	32
24"x24" R PO	19.05	5	30
24"x24" R UP	23.25	6	30
35"x35" R	25.87	3	18
24"x48" R	22.96	3	28
24"x48" R	22.96	3	28
21"x21"	22.30	7	24
3"x12" Bullnose	6.03	24	120



### Characteristics:

- Precisely cut from larger tiles, often rectified.
- Sharper edges and cleaner lines.
- Tighter grout joints possible.



### Considerations:

- **Higher Precision:** Better for modern, seamless looks.
- **Edge Sharpness:** Can be more prone to chipping during handling.
- **Cost:** Often more expensive due to manufacturing precision.



### Installation Tips:

- Flat substrate is essential to maintain tight grout lines.
- Use unsanded grout for narrow joints.
- Clean excess grout quickly to prevent staining sharp edges.