



**Selene**

**DUNE**  
UNIQUE MATTERS

**Roca**

# Selene

Selene, the new ceramic collection where the natural onyx visual effect is subtly created in a carefully selected array of colors. A modern yet timeless collection, with a wide variety of accessories, to create spaces that are full of character and class.



Selene Grey



Selene Light Satin 35"x35"



Selene Mariana 12"x35"



Selene Sky 12"x35"


# Selene

Ceramic Wall & Glazed Porcelain

11mm  **12"x35"**  
30x90 cm



Mariana



12"x35"

## Technical Specifications

| CHARACTERISTICS             | STANDARD      | DECLARED ASTM |
|-----------------------------|---------------|---------------|
| Dimensions                  | ISO 10545-2   | ± 0.6%        |
| Water Absorption            | ISO 10545-3   | E>10%         |
| Flatness                    | ISO 10545-2   | ± 0.5%        |
| Crazing Resistance          | ISO 10545-11  | Accomplish    |
| Resistance to Stains        | ISO 10545-14  | 5             |
| Breaking Strength           | ISO 10545-4:9 | >=125 lbf     |
| Frost Resistance            | ISO 10545-12  | N/A           |
| Resistance to Thermal Shock | ISO 10545-9   | Accomplish    |



Selene Mariana 12"x35"

## Packaging Info

| Size    | SF per carton | PC per carton | BX per pallet |
|---------|---------------|---------------|---------------|
| 12"x35" | 11.62         | 4             | 22            |


# Selene

Ceramic Wall & Glazed Porcelain

10mm  **35"x35"**  
90x90 cm



Cappuccino



35"x35"

## Technical Specifications

| CHARACTERISTICS                  | STANDARD      | DECLARED ASTM |
|----------------------------------|---------------|---------------|
| Dimensions                       | ISO 10545-2   | ± 0.6%        |
| Water Absorption                 | ISO 10545-3   | E≤0.5%        |
| Resistance to Surface Abrasion   | ISO 10545-7   | Class 3       |
| Flatness                         | ISO 10545-2   | ± 0.5%        |
| Crazing Resistance               | ISO 10545-11  | Accomplish    |
| Resistance to Stains             | ISO 10545-14  | 5             |
| Chemical Resistance Swimmingpool | ISO 10545-13  | GHB           |
| Slip Resistance                  | 41901 EX      | Class 0       |
| Breaking Strength                | ISO 10545-4:9 | ≥350 lbf      |
| Frost Resistance                 | ISO 10545-12  | Accomplish    |
| Resistance to Thermal Shock      | ISO 10545-9   | Accomplish    |



Selene Cappuccino 35"x35"

## Packaging Info


| Size    | SF per carton | PC per carton | BX per pallet |
|---------|---------------|---------------|---------------|
| 35"x35" | 8.72          | 1             | 44            |




# Selene

Ceramic Wall & Glazed Porcelain

10mm  **35"x35"**  
90x90 cm

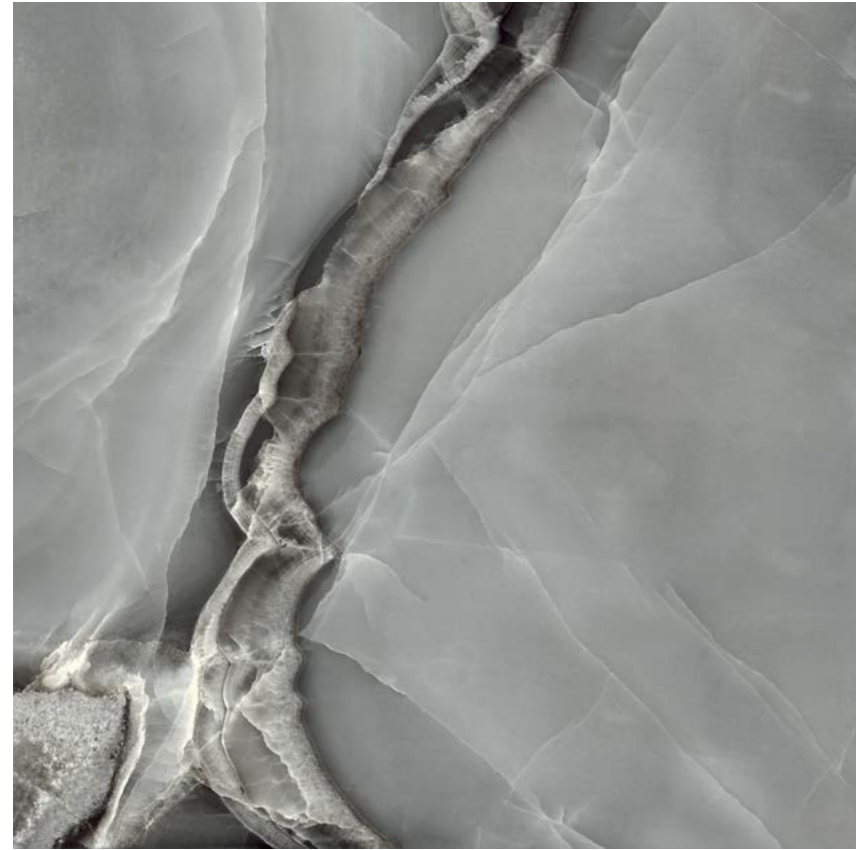

Dark



35"x35"

## Technical Specifications

| CHARACTERISTICS                | STANDARD      | DECLARED ASTM |
|--------------------------------|---------------|---------------|
| Dimensions                     | ISO 10545-2   | ± 0.6%        |
| Water Absorption               | ISO 10545-3   | E<=0.5%       |
| Resistance to Surface Abrasion | ISO 10545-7   | Class 2       |
| Chemical Resistance            | ISO 10545-13  | GHB           |
| Flatness                       | ISO 10545-2   | ± 0.5%        |
| Crazing Resistance             | ISO 10545-11  | Accomplish    |
| Resistance to Stains           | ISO 10545-14  | 5             |
| Slip Resistance                | 41901 EX      | Class 0       |
| Breaking Strength              | ISO 10545-4:9 | >=350 lbf     |
| Frost Resistance               | ISO 10545-12  | Accomplish    |
| Resistance to Thermal Shock    | ISO 10545-9   | Accomplish    |



Selene Dark 35"x35"

## Packaging Info

| Size    | SF per carton | PC per carton | BX per pallet |
|---------|---------------|---------------|---------------|
| 35"x35" | 8.72          | 1             | 44            |


# Selene

Ceramic Wall & Glazed Porcelain

9mm  **24"x24"**  
60x60 cm



Sky



24"x24"

## Technical Specifications

| CHARACTERISTICS                | STANDARD      | DECLARED ASTM |
|--------------------------------|---------------|---------------|
| Dimensions                     | ISO 10545-2   | ± 0.6%        |
| Water Absorption               | ISO 10545-3   | E≤0.5%        |
| Resistance to Surface Abrasion | ISO 10545-7   | Class 4       |
| Chemical Resistance            | ISO 10545-13  | GA            |
| Flatness                       | ISO 10545-2   | ± 0.5%        |
| Crazing Resistance             | ISO 10545-11  | Accomplish    |
| Resistance to Stains           | ISO 10545-14  | 5             |
| Slip Resistance                | 41901 EX      | Class 0       |
| Breaking Strength              | ISO 10545-4:9 | ≥350 lbf      |
| Frost Resistance               | ISO 10545-12  | Accomplish    |
| Resistance to Thermal Shock    | ISO 10545-9   | Accomplish    |



Selene Sky 24"x24"

## Packaging Info

| Size    | SF per carton | PC per carton | BX per pallet |
|---------|---------------|---------------|---------------|
| 24"x24" | 11.62         | 3             | 48            |

# Selene

Ceramic Wall & Glazed Porcelain

11mm  **12"x35"**  
30x90 cm



Sky



12"x35"

## Technical Specifications - 12"x35"

| CHARACTERISTICS             | STANDARD     | DECLARED ASTM |
|-----------------------------|--------------|---------------|
| Dimensions                  | ISO 10545-2  | ± 0.5%        |
| Water Absorption            | ISO 10545-3  | E>10%         |
| Chemical Resistance         | ISO 10545-13 | GA            |
| Flatness                    | ISO 10545-2  | ± 0.5%        |
| Crazing Resistance          | ISO 10545-11 | Accomplish    |
| Resistance to Stains        | ISO 10545-14 | 5             |
| Frost Resistance            | ISO 10545-12 | N/A           |
| Resistance to Thermal Shock | ISO 10545-9  | Accomplish    |



Selene Sky 12"x35"

## Packaging Info

| Size    | SF per carton | PC per carton | BX per pallet |
|---------|---------------|---------------|---------------|
| 12"x35" | 11.62         | 4             | 48            |


# Selene

Ceramic Wall & Glazed Porcelain

10mm  **35"x35"**  
90x90 cm



Light



35"x35"

## Technical Specifications

| CHARACTERISTICS                | STANDARD      | DECLARED ASTM |
|--------------------------------|---------------|---------------|
| Dimensions                     | ISO 10545-2   | ± 0.6%        |
| Water Absorption               | ISO 10545-3   | E≤0.5%        |
| Resistance to Surface Abrasion | ISO 10545-7   | Class 4       |
| Chemical Resistance            | ISO 10545-13  | GHB           |
| Flatness                       | ISO 10545-2   | ± 0.5%        |
| Crazing Resistance             | ISO 10545-11  | Accomplish    |
| Resistance to Stains           | ISO 10545-14  | 5             |
| Slip Resistance                | 41901 EX      | Class 0       |
| Breaking Strength              | ISO 10545-4:9 | ≥350 lbf      |
| Frost Resistance               | ISO 10545-12  | Accomplish    |
| Resistance to Thermal Shock    | ISO 10545-9   | Accomplish    |

## Packaging Info

| Size    | SF per carton | PC per carton | BX per pallet |
|---------|---------------|---------------|---------------|
| 35"x35" | 8.72          | 1             | 44            |



Selene Light 35"x35"


# Selene

Ceramic Wall & Glazed Porcelain

11mm  **12"x35"**  
30x90 cm



Light



12"x35"

## Technical Specifications

| CHARACTERISTICS             | STANDARD      | DECLARED ASTM |
|-----------------------------|---------------|---------------|
| Dimensions                  | ISO 10545-2   | ± 0.5%        |
| Water Absorption            | ISO 10545-3   | E>10%         |
| Chemical Resistance         | ISO 10545-13  | GA            |
| Flatness                    | ISO 10545-2   | ± 0.5%        |
| Crazing Resistance          | ISO 10545-11  | Accomplish    |
| Resistance to Stains        | ISO 10545-14  | 5             |
| Breaking Strength           | ISO 10545-4:9 | >=125 lbf     |
| Frost Resistance            | ISO 10545-12  | N/A           |
| Resistance to Thermal Shock | ISO 10545-9   | Accomplish    |



Selene Light 12"x35"

## Packaging Info

| Size    | SF per carton | PC per carton | BX per pallet |
|---------|---------------|---------------|---------------|
| 12"x35" | 11.62         | 4             | 48            |




# Selene

Ceramic Wall & Glazed Porcelain

10mm  **35"x35"**  
90x90 cm



## Light Satin



35"x35"

## Technical Specifications

| CHARACTERISTICS                | STANDARD      | DECLARED ASTM |
|--------------------------------|---------------|---------------|
| Dimensions                     | ISO 10545-2   | ± 0.6%        |
| Water Absorption               | ISO 10545-3   | E≤0.5%        |
| Resistance to Surface Abrasion | ISO 10545-7   | Class 4       |
| Flatness                       | ISO 10545-2   | ± 0.5%        |
| Crazing Resistance             | ISO 10545-11  | Accomplish    |
| Resistance to Stains           | ISO 10545-14  | 5             |
| Slip Resistance                | 41901 EX      | Class 0       |
| Breaking Strength              | ISO 10545-4:9 | ≥350 lbf      |
| Frost Resistance               | ISO 10545-12  | Accomplish    |
| Resistance to Thermal Shock    | ISO 10545-9   | Accomplish    |

## Packaging Info

| Size    | SF per carton | PC per carton | BX per pallet |
|---------|---------------|---------------|---------------|
| 35"x35" | 8.72          | 1             | 80            |



Selene Light Satin 35"x35"