



Roca

Alba

Alba

Inspired by the quiet beauty of natural stone, this porcelain collection features soft veining, gentle tonal movement, and a luminous glossy finish. Each piece reflects subtle variation, creating surfaces that feel warm, refined, and effortlessly timeless.




Alba Avorio & Beige 8"x8" / 2"x8"

Glazed Porcelain & Ceramic Wall

◆ □ M B □ | 8"x8" 3"x12" 2"x8"

Alba

Glazed Porcelain

7-7.3 mm |  | **8"x8"**
19.87x19.87 cm



Bianco



8"x8" Matte



Avorio




8"x8" Matte



Crema



8"x8" Matte

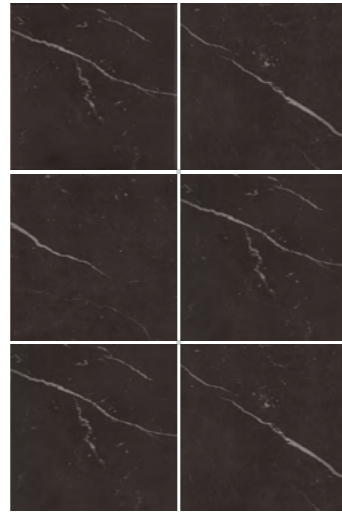

Noite



8"x8" Matte

Alba

Ceramic Wall


7-7.3 mm |  | **3"x12"** **2"x8"**
7.72x30.47 cm 5.02x20.2 cm




Bianco



2"x8" Bright & Matte




3"x12" Bright & Matte

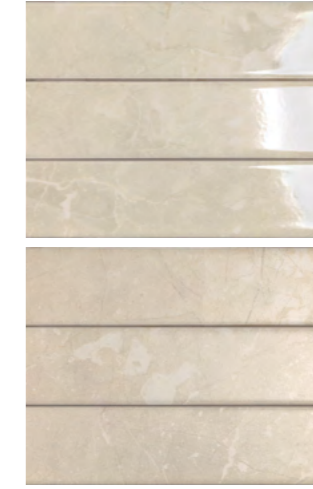

Avorio



2"x8" Bright & Matte




3"x12" Bright & Matte




Crema



2"x8" Bright & Matte



3"x12" Bright & Matte

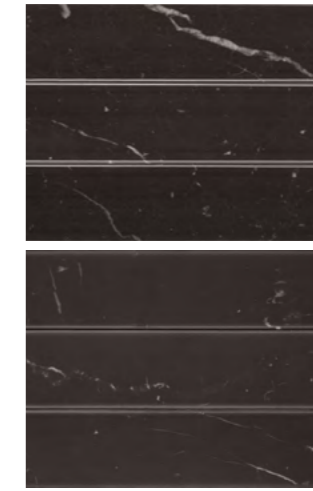

Nero



2"x8" Bright & Matte



3"x12" Bright & Matte

- 2"x8" and 8"x8" do not modulate.
- 2"x8" and 3"x12" are for wall use only.

Technical Specifications - WALL

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	ISO-10545/3	≤20%
Break Strength	ISO-10545/4	Not Applicable
Chemical Resistance	C650	Unaffected
Group	See FAQ's	3
PEI- Glazed Tiles	C1027	Not Applicable
Dynamic Coefficient of Friction (DCOF)	A326.3	Not Applicable
Shade and Texture Rating	CTDA	V3
Warpage	C485	Pass
Wedging	C502	Pass

Technical Specifications - FLOOR

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	ISO-10545/3	≤0.5%
Break Strength	ISO-10545/4	≥ 275
Chemical Resistance	C650	CLASS A(Resist) ¹
Stain Resistance	ISO-10545/14	CLASS A
Frost Resistance	C1026	Resistant
Thermal Shock Resistance	ISO-10545/9	Resistant
Crazing Resistance	ISO-10545/11	Resistant
Group	See FAQ's	4
PEI- Glazed Tiles	C1027	PEI IV
Dynamic Coefficient of Friction (DCOF)	A326.3	≥0.42
Shade and Texture Rating	CTDA	V3
Facial Dimensions	C499	Pass
Range of Thickness	C499	Pass
Warpage	C485	Pass
Wedging	C502	Pass

Packaging Info

Size	SF per carton	PC per carton	BX per pallet
8"x8"	14.45	34	45
3"x12"	12.64	50	84
2"x8"	6.50	60	105