



**Roca**

**Calacata Gold**

# Calacata Gold

The Calacata Gold generates unique atmospheres and bright spaces offering a balance between the matte and polished finishes. Also adding warmth through its gold veining, making way for versatile combinations of elements.



Calacata Gold 24"x48" UP, 12"x24" R PO, 6"x18" Wall & 13"x13" Mosaic.

### Matte & Polished Porcelain + Ceramic Wall


- ◇ 24"x48 R PO - 24"x48 R UP - 12"x24" R PO - 12"x24" UP - 6"x18" Wall

# Calacata Gold


Matte & Polished Porcelain



24"x48" R 60x120 cm    12"x24" R 30x60 cm    12"x24" 31x61 cm    6"x18" 15x45 cm

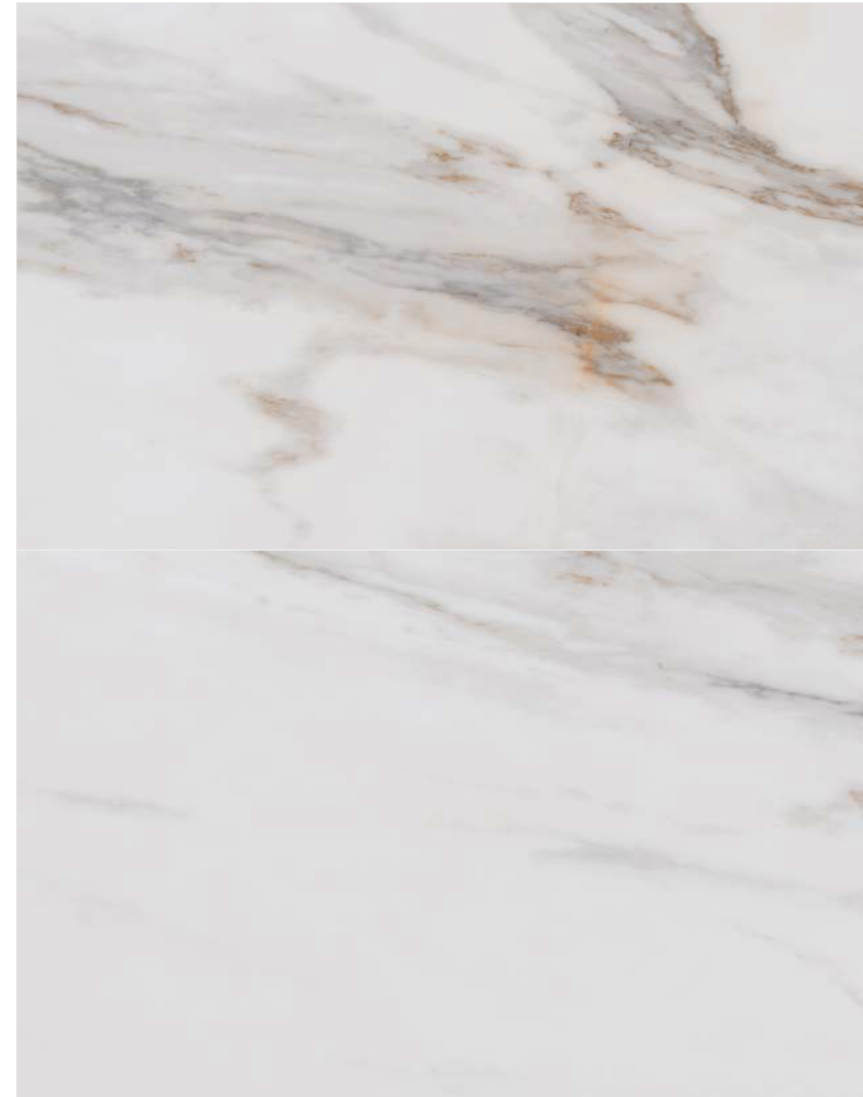


## Gold




24"x48" R PO UCALGPO2448R    24"x48" R UP UCALGMT2448R



12"x24" R PO FCGPER5171    12"x24" UP FCGPPR5171



6"x18" Wall FCGRW2171

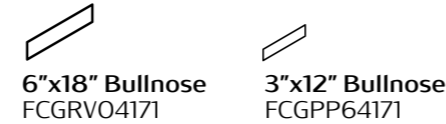

6"x18" Bullnose FCGRVO4171    3"x12" Bullnose FCGPP64171



13"x13" Mosaic FCGPPR8171



## Technical Specifications - Wall

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	C373	>10%
Break Strength	C648	Meets or Exceeds
Scratch Hardness	MOH's Scale	N/A
Chemical Resistance	C650	Unaffected
Shade and Texture Rating	CTDA "V"	V3
Warpage	C485	Pass
Wedging	C502	Pass

## Technical Specifications - Floor

CHARACTERISTICS	STANDARD	DECLARED ASTM	
		Matte	Polished
Water Absorption	C373	<=0.5%	<=0.5%
Break Strength	C648	Min. 335	Min. 335
Scratch Hardness	MOH's Scale	5	3
Chemical Resistance	C650	Unaffected	Unaffected
Frost Resistance	C1026	Resistant	Resistant
Group	See FAQ's	4	3
Deep Abrasion - Unglazed Tiles	C1043	Pass	Pass
PEI- Glazed Tiles***	C1027	4	3
Minimum Bond Strength (PSI)	C482	165	165
Dynamic Coefficient of Friction (DCOF)	A137.1	>=0.42	<=0.40
Shade and Texture Rating	CTDA "V"	V3	V3
Facial Dimensions	C499	Pass	Pass
Range of Thickness	C499	Pass	Pass
Warpage	C485	Pass	Pass
Wedging	C502	Pass	Pass

## Packaging Info

Size	SF per carton	PC per carton	BX per pallet
12"x24" R PO	18.84	10	32
12"x24" UP	20.34	10	32
24"x48" R	22.93	3	27
13"x13" Mosaic	13.13	11	36
3"x12" Bullnose	5.92	24	96
6"x18" Wall	11.95	16	55
6"x18" Bullnose	11.95	16	65

# Porcelain Mosaics - Cut



## Characteristics:

- Precisely cut from larger tiles, often rectified.
- Sharper edges and cleaner lines.
- Tighter grout joints possible.



## Considerations:

- **Higher Precision:** Better for modern, seamless looks.
- **Edge Sharpness:** Can be more prone to chipping during handling.
- **Cost:** Often more expensive due to manufacturing precision.



## Installation Tips:

- Flat substrate is essential to maintain tight grout lines.
- Use unsanded grout for narrow joints.
- Clean excess grout quickly to prevent staining sharp edges.