



Roca

XL SLAB



Fulmine

Fulmine

Polished Porcelain



63"x126" R
160x320 cm

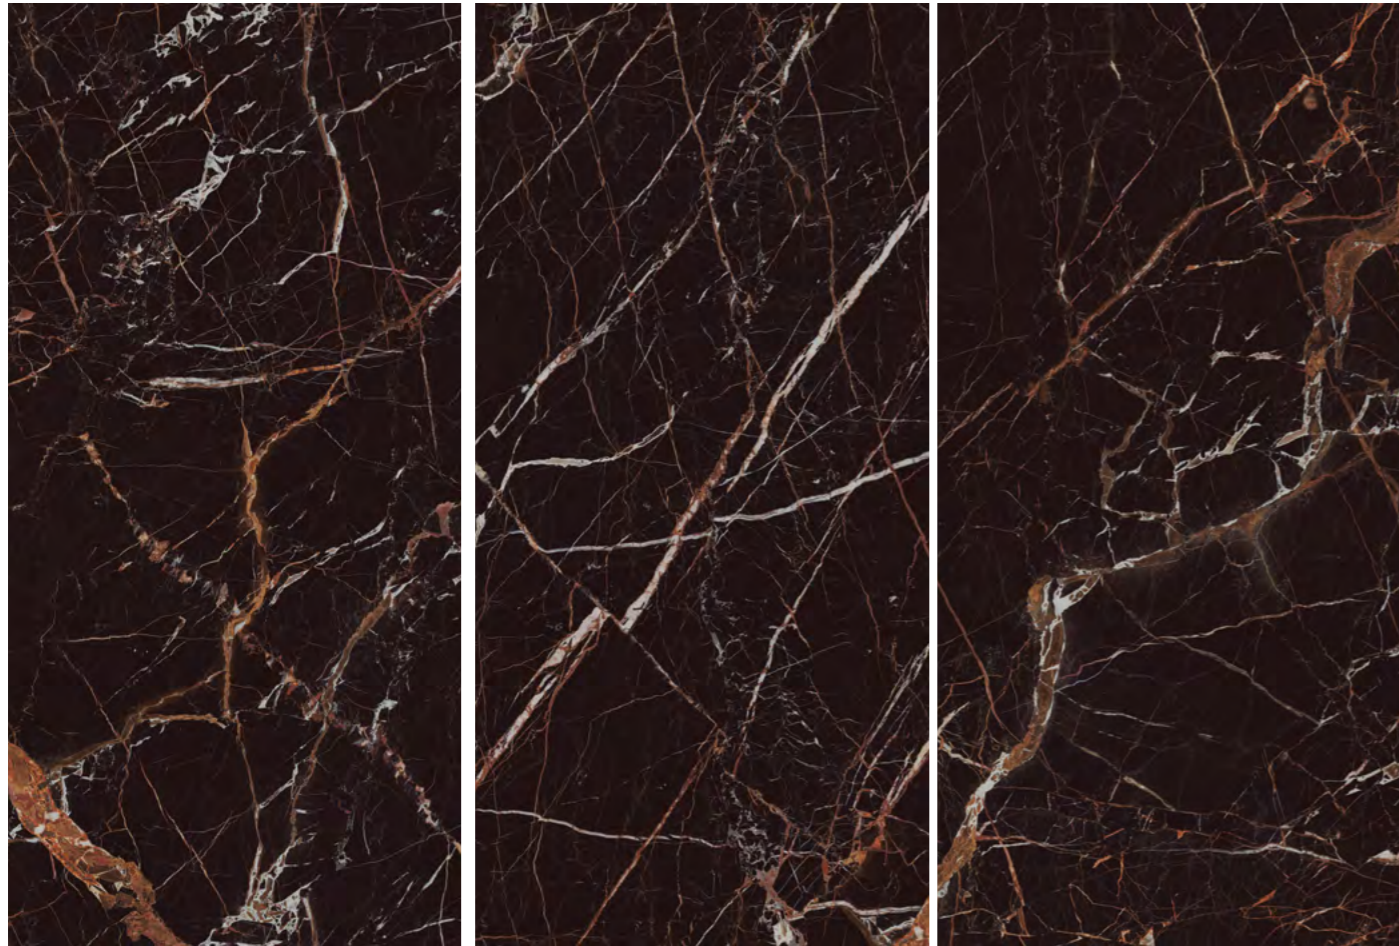

63"x126" R PO

Fulmine

Polished Porcelain

Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	ISO-10545/3	<=0.5%
Break Strength	ISO-10545/4	Min. 200 N
Chemical Resistance	C650	Unaffected
Stain Resistance	ISO-10545/14	5
Frost Resistance	C1026	Resistant
Thermal Shock Resistance	ISO-10545/9	Resistant
Crazing Resistance	ISO-10545/11	Resistant
Group	See FAQ's	4
PEI- Glazed Tiles	C1027	PEI (V)
Dynamic Coefficient of Friction (DCOF)	A326.3	<0.40
Shade and Texture Rating	CTDA	V3
Facial Dimensions	C499	Pass
Range of Thickness	C499	Pass
Warpage	C485	Pass
Wedging	C502	Pass

Packaging Info

Size	SF per carton	PC per carton	BX per pallet
63"x126" R	55.11	1	36