



**Roca**






**Riviere**



# Riviere

Inspired by limestone shaped by the passage of time and water, Riviere conveys calm, elegance and authenticity. The surface of this porcelain tile is characterised by a matte, almost silky background from which subtle veins emerge that are only revealed with light, adding movement and a genuinely organic effect. This effect is amplified by InTech+ technology, which captures the tonal variations, reliefs and nuances with the maximum precision that make each piece a living surface. When walking on Riviere, you can feel the duality that defines it: subtlety and character. The calm, contemporary base comes to life through delicate veins that give it an organic movement. With these features, Riviere conquers space with the quiet elegance of the essential.

## Glazed Porcelain






| 24"x48" R   24"x24"R   12"x24" R

Riviere Beige 24"x48" R





Riviere Beige 24"x48" R



Riviere Rigato Gris 24"x48" R



Riviere Gris 24"x48" R




Riviere Gris 24"x48" R



# Riviere

Glazed Porcelain



<b>24"x48" R</b> 60x120 cm	<b>24"x24" R</b> 60x60 cm	<b>12"x24" R</b> 30x60 cm
-------------------------------	------------------------------	------------------------------



## Beige




24"x48" R



12"x24" R



24"x24" R

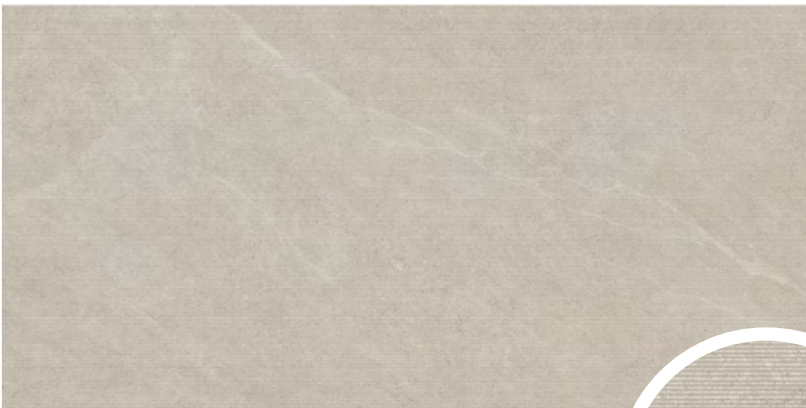

## Rigato Beige




24"x48" R



# Riviere

Glazed Porcelain



<b>24"x48" R</b> 60x120 cm	<b>24"x24" R</b> 60x60 cm	<b>12"x24" R</b> 30x60 cm
-------------------------------	------------------------------	------------------------------



## Gris



24"x48" R



12"x24" R




24"x24" R



## Rigato Gris



24"x48" R



## Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	ISO-10545/3	$\leq 0.5\%$
Break Strength	ISO-10545/4	Min. 1500 N
Chemical Resistance	C650	Class A (Resist) <sup>1</sup>
Stain Resistance	ISO-10545/14	5
Frost Resistance	C1026	Resistant
Thermal Shock Resistance	ISO-10545/9	Resistant
Crazing Resistance	ISO-10545/11	Resistant
Group	See FAQ's	4
PEI- Glazed Tiles	C1027	PEI (V)
Dynamic Coefficient of Friction (DCOF)	A326.3	$\geq 0.42$
Shade and Texture Rating	CTDA	V3
Facial Dimensions	C499	Pass
Range of Thickness	C499	Pass
Warpage	C485	Pass
Wedging	C502	Pass

## Packaging Info

Size	SF per carton	PC per carton
24"x48" R	15.50	2
24"x24" R	15.50	3
12"x24" R	11.63	6