





Statuary, the spirit of marble. A contemporary take on natural Italian marble setting new standards in styles and trends whilst conserving all its prestige and quality. A faithful ceramic adaptation of the marble par excellence. The same texture, the same aesthetic effect, but with more design input and enhanced functionality.

Glazed & Polished Porcelain


⇒ 35"x35" R - 24"x48" R - 24"x24" R - 12"x24" R - 8"x9" Hex

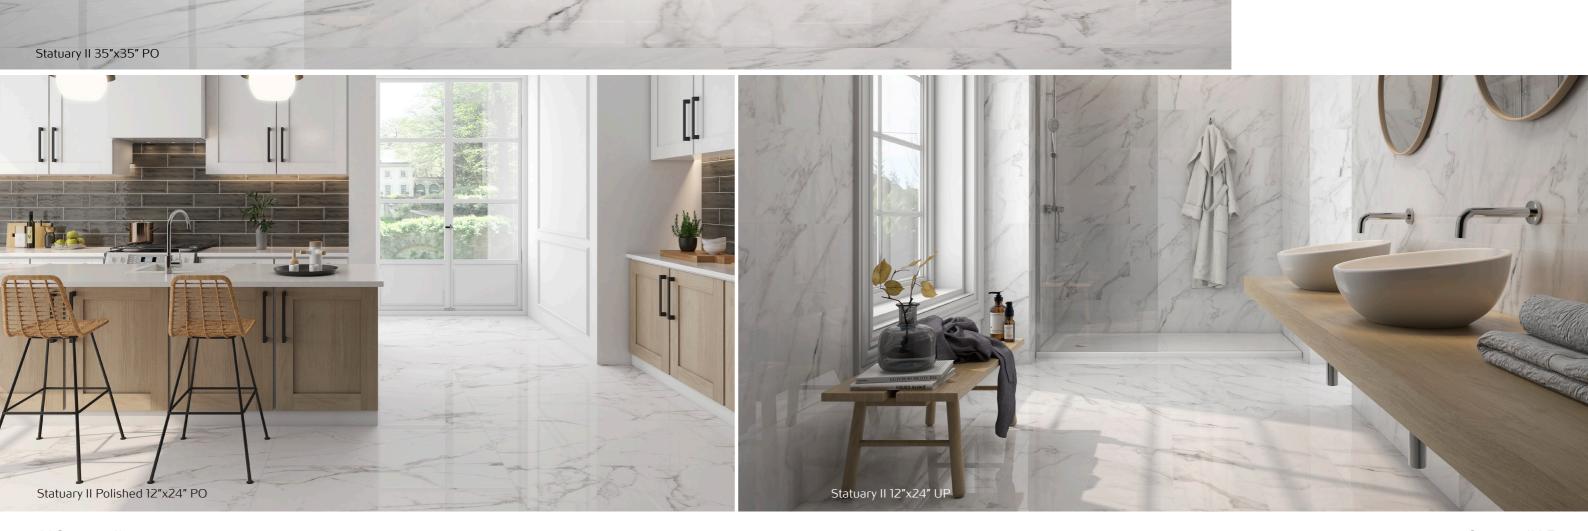


NATURE




Glazed & Polished Porcelain

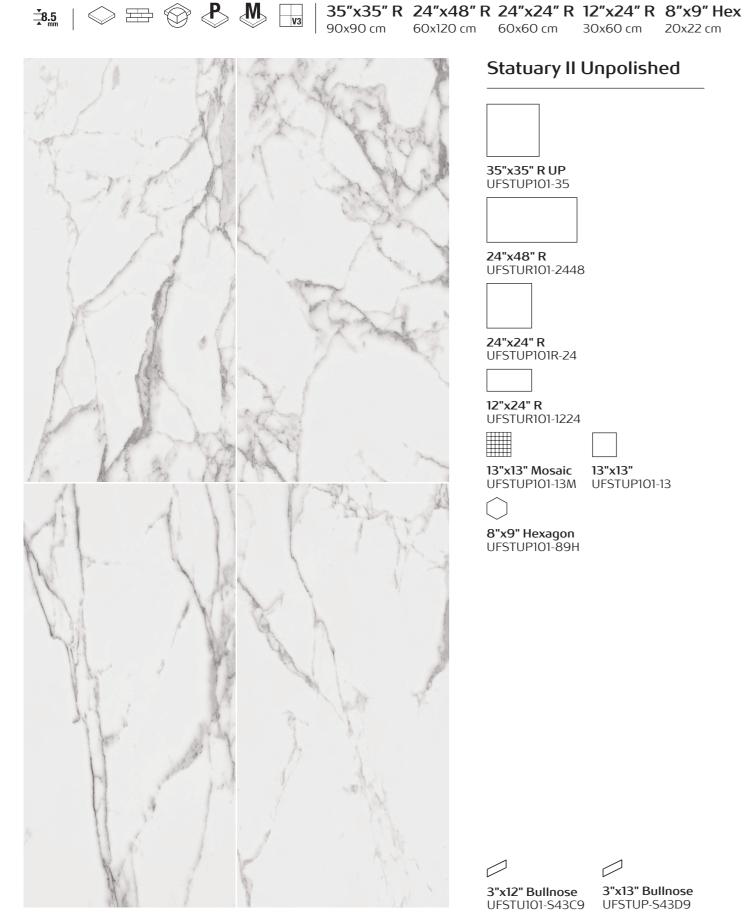

Statuary II Unpolished

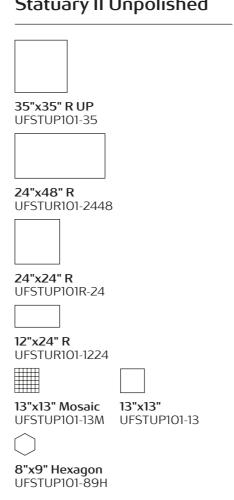

3"x12" Bullnose UFSTU101-S43C9 UFSTUP-S43D9

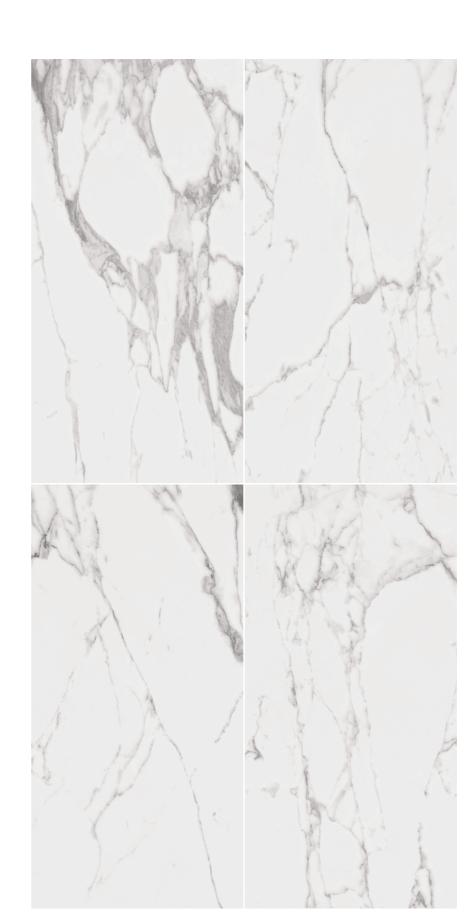

Statuary II Polished

35"x35" R PO UFST100-35PO



24"x48" R UFST100-2448PO



24"x24" R UFST100-24P0



12"x24" R UFST100-1224P0

6 | Statuary II Statuary II | 7



Statuary Wall

Statuary, the spirit of marble. A contemporary take on natural Italian marble, setting new standards in styles and trends whilst conserving all its prestige and quality. A faithful ceramic adaptation of marble with the same aesthetic effect, adding more design and enhanced funtionality.

Ceramic Wall


3"x6" - 4"x10" - 9.5"x13"


Gres Stoneware

₩ 😂 8"x9" Hexagon


8 | Statuary II | 9

Ceramic Wall & Gres Stoneware

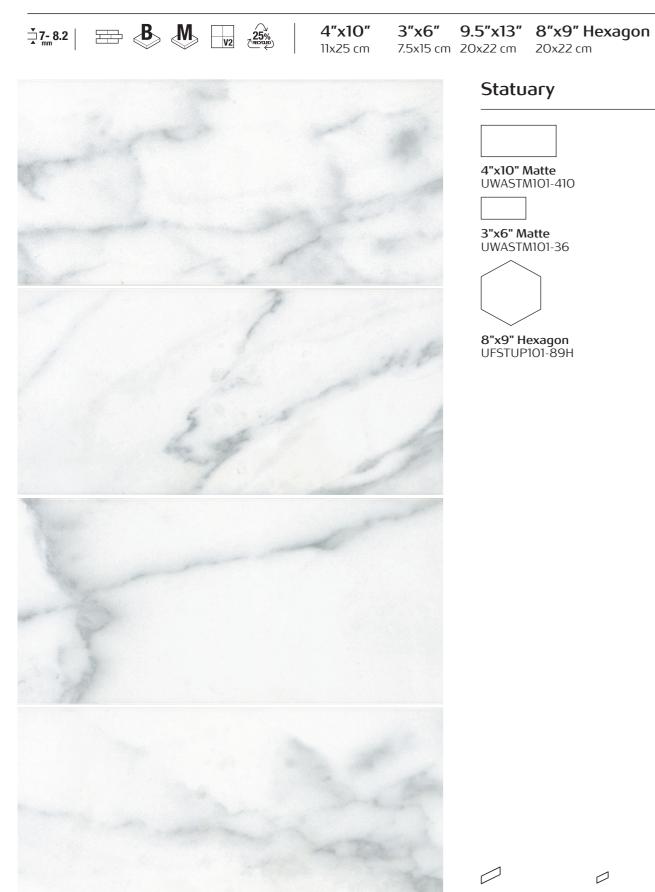



8"x9" Hexagon UFSTUP101-89H

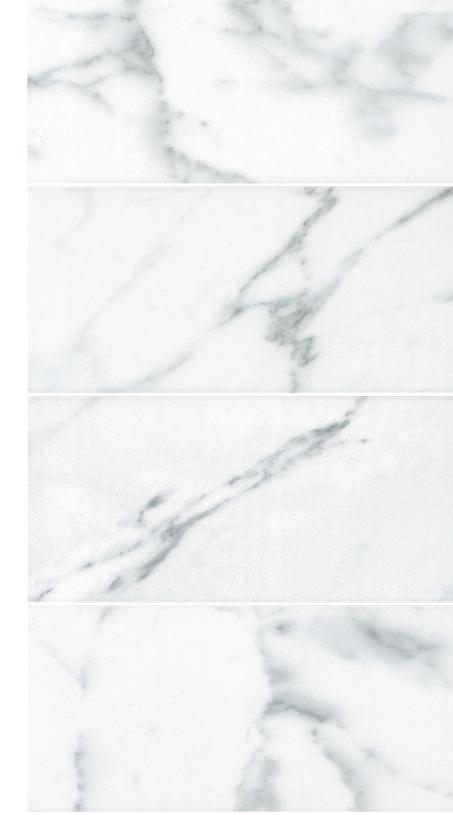



3"x10" Bullnose UWSTM101-S4310 UWSTM101-S4369

3"x10" Bullnose UWSTB101-S4310 **3"x6" Bullnose** UWSTB101-S4369

3"x9.5" Bullnose UWSTB101-S439

Ceramic Wall & Gres Stoneware

Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM	
		Polished	Unpolished
Water Absorption	C373	<=0.5%	<=0.5%
Break Strength	C648	Min. 335	Min. 335
Scratch Hardness	MOH's Scale	3	5
Chemical Resistance	C650	Unaffected	Unaffected
Frost Resistance	C1026	Resistant	Resistant
Group	See FAQ's	4	4
Deep Abrasion - Unglazed Tiles	C1243	Pass	Pass
PEI- Glazed Tiles***	C1027	4	4
Minimum Bond Strength (PSI)	C482	165	165
Dynamic Coefficient of Friction (DCOF)	A137.1	<0.42	>=0.42
Shade and Texture Rating	CTDA "V"	V3	V3
Facial Dimensions	C499	Pass	Pass
Range of Thickness	C499	Pass	Pass
Warpage	C485	Pass	Pass
Wedging	C502	Pass	Pass

Packaging Info

Size	SF per carton	PC per carton
13"x13"	19.12	16
13"x24" Mosaic	13.15	11
12"x24" PO	18.94	10
12"x24" UP	19.38	10
24"x24" PO	19.05	5
24"x24" UP	15.50	4
24"x48" PO	15.28	2
24"x48" UP	15.50	2
35"x35"	17.22	2
8"x9" Hexagon	10.36	28

Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	C373	>10%
Break Strength	C648	Meets or Exceeds
Scratch Hardness	MOH's Scale	N/A
Chemical Resistance	C650	Unaffected
Shade and Texture Rating	CTDA "V"	V2
Warpage	C485	Pass
Wedging	C502	Pass

Packaging Info

Size	SF per carton	PC per carton
3"x6"	9.99	80
4"x10"	11.25	38
9.5"x13"	25.58	30

12 | Statuary II | 13