



**Roca**

**Derby**



# Derby

Derby, industrial design. With a minimalistic inspiration, Derby offers a range of full body porcelain tiles that replicate the design of marked cement where the movement of graphics plays subtly in changes of hues and less defined frames. Its porcelain finish makes it suitable both for commercial and residential applications.



Derby Beige 32"x32" R

## Color Body Porcelain

32"x32" R - 12"x24"





Derby Vison 32"x32" R & Vison 11.5"x17" Hexagon Mosaic



Derby Negro 32"x32"R




Derby Beige Hexagon Mosaic 11.5"x17"



# Derby

## Color Body Porcelain



32"x32" R 12"x24" R  
80x80 cm 30x60 cm

## Beige




32"x32" R  
FZ5ROAE041



12"x24"  
FZ56T35041



**11.5"x17" Hexagon Mosaic**  
FZ5T3GW041

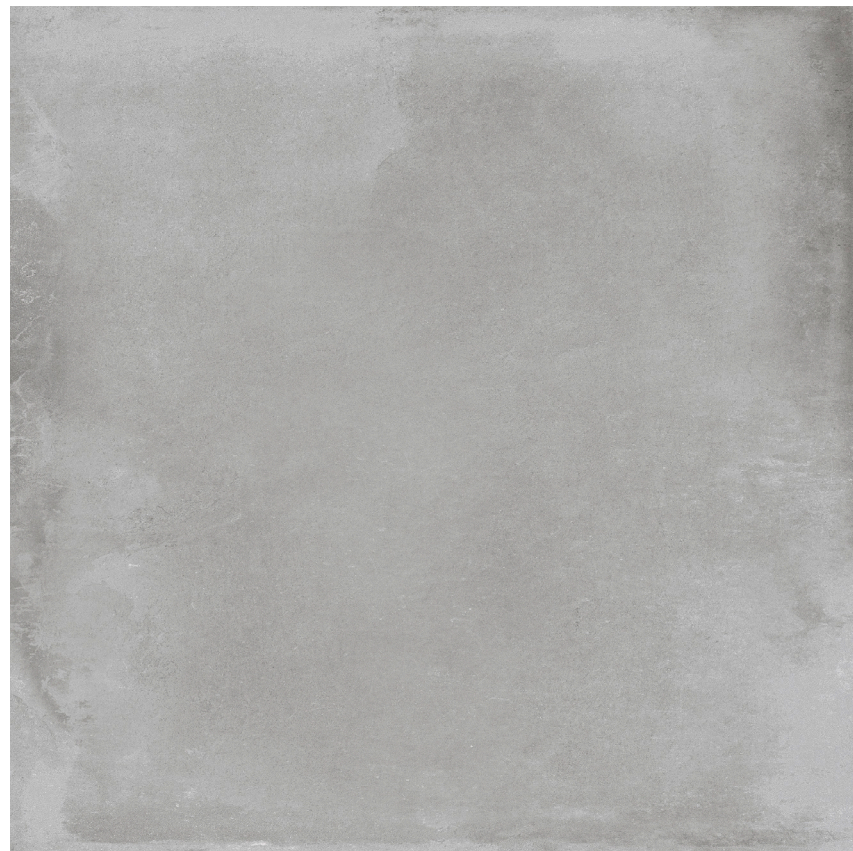

## Gris



32"x32" R  
FZ5R0AE021




12"x24"  
FZ56T35021



11.5"x17" Hexagon Mosaic  
FZ5T3GW021



## Vison




32"x32" R  
FZ5ROAE141




12"x24"  
FZ56T35141



**11.5"x17" Hexagon Mosaic**  
FZ5T3GW141

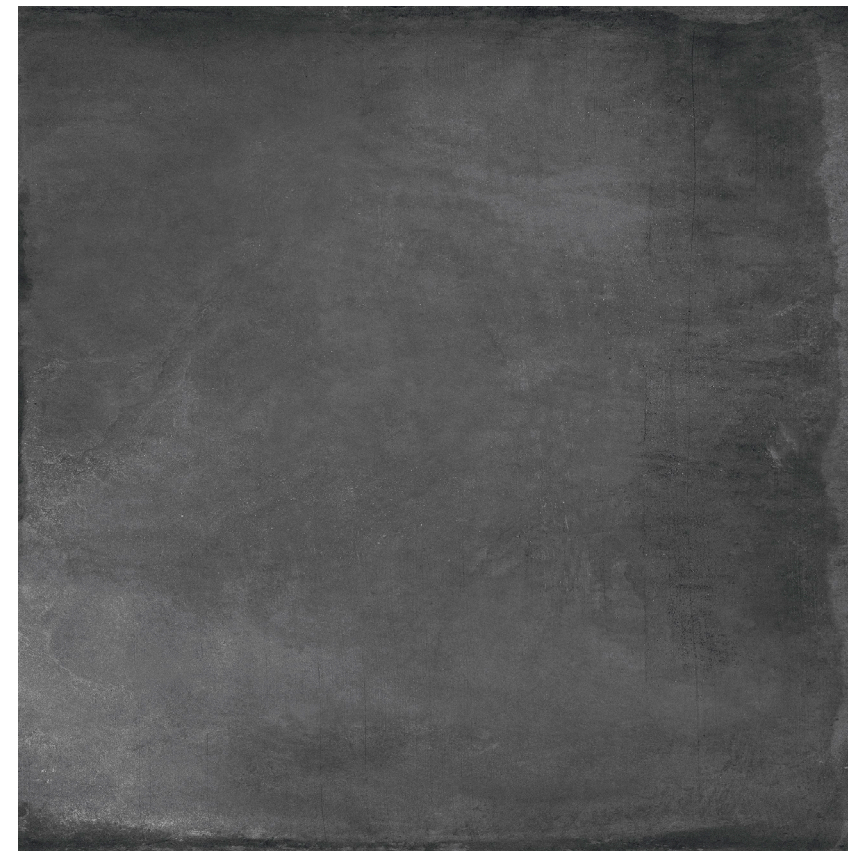

Negro



32"x32" R  
FZ5ROAE161



12"x24"  
FZ56T35161



11.5"x17" Hexagon Mosaic  
FZ5T3GW161



# Derby

## Color Body Porcelain

### Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	C373	<=0.5%
Break Strength	C648	Min. 450
Scratch Hardness	MOH's Scale	5
Chemical Resistance	C650	Unaffected
Frost Resistance	C1026	Resistant
Group	See FAQ's	4
Deep Abrasion - Unglazed Tiles	C1043	Pass
PEI- Glazed Tiles***	C1027	-
Minimum Bond Strength (PSI)	C482	165
Dynamic Coefficient of Friction (DCOF)	A137.1	>=0.42
Shade and Texture Rating	CTDA "V"	V3
Facial Dimensions	C499	Pass
Range of Thickness	C499	Pass
Warpage	C485	Pass
Wedging	C502	Pass

\*\*\* Contains a percentage of pre-consumer recycled content superior to 80% which has been certified by Bureau Veritas.

### Packaging Info

Size	SF per carton	PC per carton
32"x32"	13.78	2
12"x24"	14.25	7
11.5"x17" Mosaic	5.53	7