



Roca

Positano II

Positano II

Our Positano series derives its inspiration from the Brescia marble. Let the beautiful movement and luxurious veining take center stage in your next project. This series offers a complete package of floor, wall tile and mosaics, which comes in three stylish colors and 2 finishes that are suitable for both residential and commercial applications.



Positano II Beige 12"x24" UP

Glazed & Polished Porcelain

◇ □ 21"x21" - 12"x24" R - 12"x24"



Positano II Gris 21"x21" UP



Positano II Beige 21"x21" UP




Positano II Blanco 21"x21"UP


Positano II

Glazed & Polished Porcelain

8.5
mm




21"x21" 12"x24" R
53x53 cm 30x60 cm

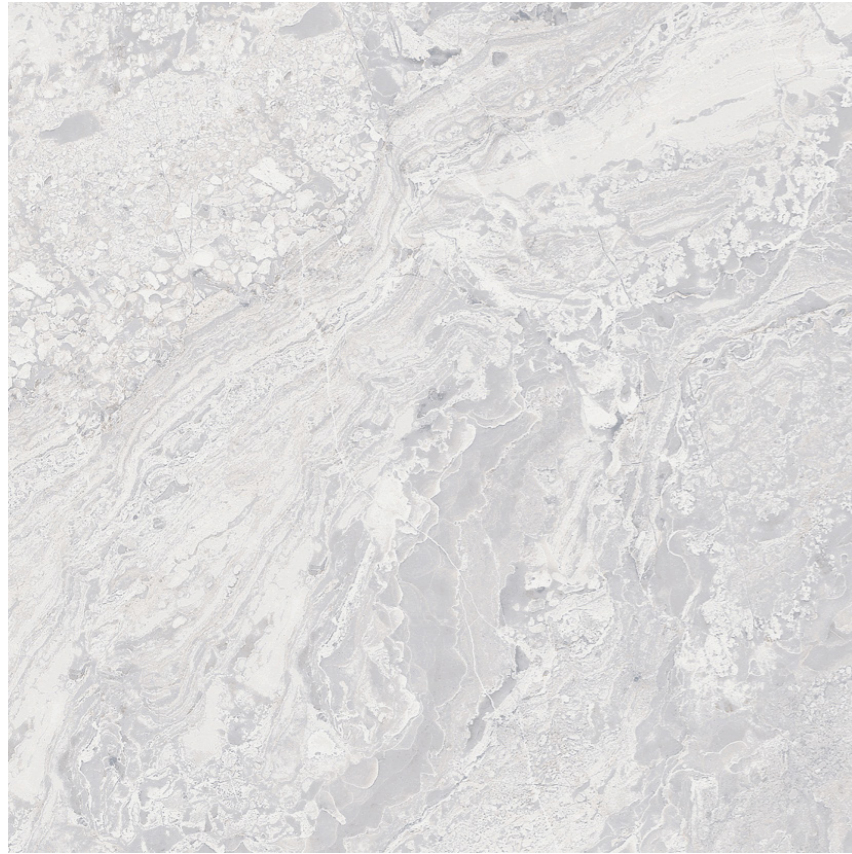

Blanco



21"x21" UP
UFPS100-21



12"x24" UP
UFPS100-1224



12"x24" R PO
UFPSP001-1224



13"x13" UP Mosaic
UFPS100-13M



3"x12" UP Bullnose
UFPS100-S43C9



Beige



21"x21" UP
UFPS101-21



12"x24" UP
UFPS101-1224



12"x24" R PO
UFPSP002-1224



13"x13" UP Mosaic
UFPS101-13M




3"x12" UP Bullnose
UFPS101-S43C9



Gris



21"x21" UP
UFPS102-21



12"x24" UP
UFPS102-1224



12"x24" R PO
UFPSP003-1224



13"x13" UP Mosaic
UFPS102-13M



3"x12" UP Bullnose
UFPS102-S43C9

Positano II

Glazed & Polished Porcelain

Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM	
		Polished	Unpolished
Water Absorption	C373	<=0.5%	<=0.5%
Break Strength	C648	Min. 335	Min. 300
Scratch Hardness	MOH's Scale	3	4
Chemical Resistance	C650	Unaffected	Unaffected
Frost Resistance	C1026	Resistant	Resistant
Group	See FAQ's	3	4
Deep Abrasion - Unglazed Tiles	C1243	Pass	-
PEI- Glazed Tiles***	C1027	4	4
Minimum Bond Strength (PSI)	C482	165	165
Dynamic Coefficient of Friction (DCOF)	A137.1	<=0.42	>=0.42
Shade and Texture Rating	CTDA "V"	V3	V3
Facial Dimensions	C499	Pass	Pass
Range of Thickness	C499	Pass	Pass
Warpage	C485	Pass	Pass
Wedging	C502	Pass	Pass

Packaging Info

Size	SF per carton	PC per carton
12"x24"	18.94	10
21"x21"	22.28	7
13"x13" Mosaic	13.5	11
3"x12" Bullnose	5.89	24