



Abaco

color body porcelain

Roca



Abaco Oxido



Abaco Grafito



Abaco Gris



Abaco Grafito



Abaco Arena



Abaco Oxido

Available Sizes

12"x24"

24"x24"

24"x48"

TECHNICAL INFORMATION


CHARACTERISTICS	STANDARD	Declared ASTM Matte	Declared ASTM In&Out
Water Absorption	ISO-10545/3	<=0.5%	<=0.5%
Break Strength	ISO-10545/4	450 Lbs	450 Lbs
Scratch Hardness	EN-101	7	7
Chemical Resistance	ISO-10545/13	Unaffected	Unaffected
Frost Resistance	ISO-10545/12	Resistant	Resistant
Group	ISO-10545/7	4	4
Minimum Bond Strength (PSI)	C482		
Dynamic Coefficient of Friction (DCOF)	A137.1	<=0.42	>=0.42
Shade and Texture Rating	CTDA	V3	V3
Facial Dimensions	ISO-10545/2	Pass	Pass
Range of Thickness	ISO-10545/2	Pass	Pass
Warpage	ISO-10545/2	Pass	Pass
Wedging	ISO-10545/2	Pass	Pass
PEI	C1027		

PACKAGING INFORMATION

SIZE	SF PER CARTON	PC PER CARTON
12"x24"	13.563	7
24"x24"	11.625	3
24"x48"	15.5	2



Abaco Deko Gris

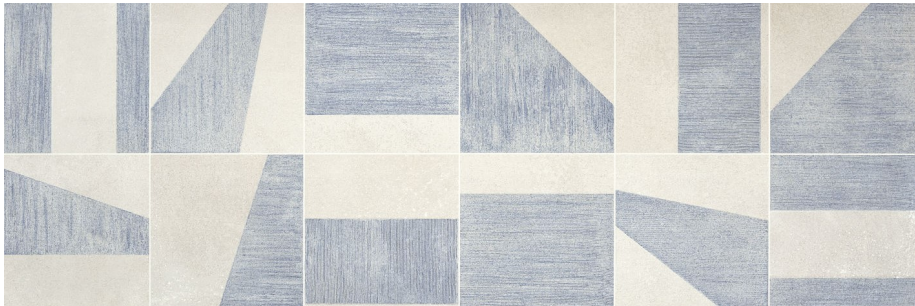

Abaco Deko Azul



Abaco Deko Arena

Available Sizes

16"x48"

TECHNICAL INFORMATION		
CHARACTERISTICS	STANDARD	Declared ASTM
Water Absorption	ISO-10545/3	>10%
Break Strength	ISO-10545/4	N/A
Scratch Hardness	EN-101	-
Chemical Resistance	ISO-10545/13	Unaffected
Shade and Texture Rating	CTDA	V3
Warpage	ISO-10545/2	Pass
Wedging	ISO-10545/2	Pass

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
16"x48"	15.50	3