



Roca

force

glazed porcelain



Force Metal & Force Crema



Force Caldera & Force Perla



Force Crema



Force Metal



Force Perla




Force Rust



Force Titanio

Available Sizes

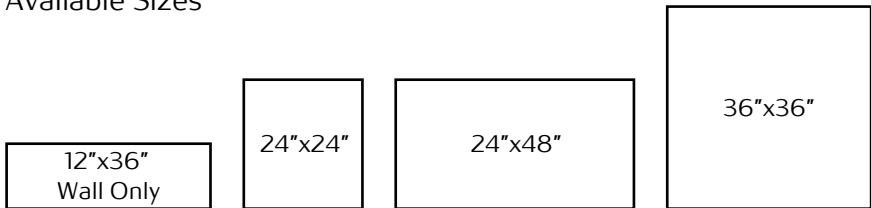

TECHNICAL INFORMATION

CHARACTERISTICS	STANDARD	Declared ASTM Floor	Declared ASTM Wall
Water Absorption	ISO-10545/3	<=0.5%	<=0.10%
Break Strength	ISO-10545/4	290 Lbs	135 Lbs
Scratch Hardness	EN-101	6	
Chemical Resistance	ISO-10545/13	Unaffected	Unaffected
Frost Resistance	ISO-10545/12	Resistant	
Group	ISO-10545/7	4	N/A
Minimum Bond Strength (PSI)	C482		
Dynamic Coefficient of Friction (DCOF)	A137.1	>=0.42	
Shade and Texture Rating	CTDA	V2	V2
Facial Dimensions	ISO-10545/2	Pass	Pass
Range of Thickness	ISO-10545/2	Pass	Pass
Warpage	ISO-10545/2	Pass	Pass
Wedging	ISO-10545/2	Pass	Pass
PEI	CI027	4	

PACKAGING INFORMATION

SIZE	SF PER CARTON	PC PER CARTON
12"x36" (wall only)	14.53	5
24"x24"	11.62	3
24"x48"	15.49	2
36"x36"	17.43	2