Roca

2021
Special Order Program

abaco

glazed porcelain

Abaco Oxido

Abaco Grafito

M V3 8.7 mm

Abaco Gris

Abaco Grafito

Abaco Arena

Abaco Oxido

Available Sizes

24”x24”

24”x48”

TECHNICAL INFORMATION		
CHARACTERISTICS	STANDARD	Declared ASTM Matte
Water Absorption	ISO-10545/3	<=0.5%
Break Strength	ISO-10545/4	450 Lbs
Scratch Hardness	EN-101	7
Chemical Resistance	ISO-10545/13	Unaffected
Frost Resistance	ISO-10545/12	Resistant
Group	ISO-10545/7	4
Minimum Bond Strength (PSI)	C482	
Dynamic Coefficient of Friction (DCOF)	A137.1	<=0.42
Shade and Texture Rating	CTDA	V3
Facial Dimensions	ISO-10545/2	Pass
Range of Thickness	ISO-10545/2	Pass
Warpage	ISO-10545/2	Pass
Wedging	ISO-10545/2	Pass
PEI	C1027	

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
24”x24”	11.625	3
24”x48”	15.5	2

M V3 10.5 mm

Abaco Deko Gris

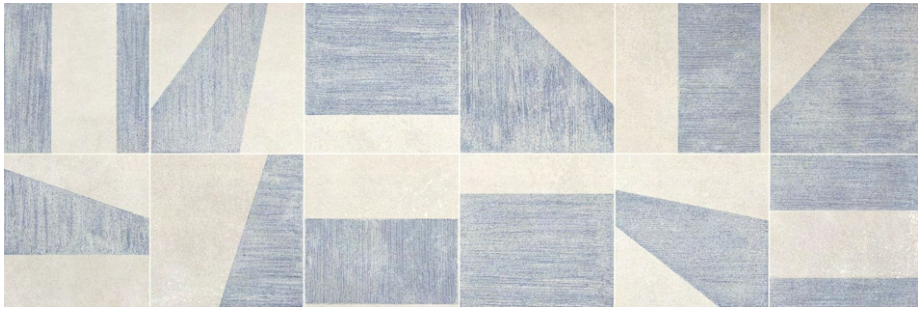

Abaco Deko Azul

Abaco Deko Arena

Available Sizes

16"x48"

TECHNICAL INFORMATION		
CHARACTERISTICS	**STANDARD**	**Declared ASTM**
Water Absorption	ISO-10545/3	>10%
Break Strength	ISO-10545/4	N/A
Scratch Hardness	EN-101	-
Chemical Resistance	ISO-10545/13	Unaffected
Shade and Texture Rating	CTDA	V3
Warpage	ISO-10545/2	Pass
Wedging	ISO-10545/2	Pass

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
16"x48"	15.50	3

Roca

abbey suites

ceramic wall

10.5 mm

Abbey Suite Fresno

Abbey Suite Lines Fresno

Abbey Suite Lines Gris

Abbey Suite Lines Vison

Available Sizes

12"x36"

16"x48"

TECHNICAL INFORMATION		
CHARACTERISTICS	**STANDARD**	**Declared ASTM**
Water Absorption	ISO-10545/3	>=0.10%
Break Strength	ISO-10545/4	135 Lbs
Scratch Hardness	EN-101	0
Chemical Resistance	ISO-10545/13	Unaffected
Shade and Texture Rating	CTDA	V2
Warpage	ISO-10545/2	Pass
Wedging	ISO-10545/2	Pass

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
12"x36"	14.56	5
16"x48"	15.5	3

Roca

art

glazed porcelain

M V4 8 mm

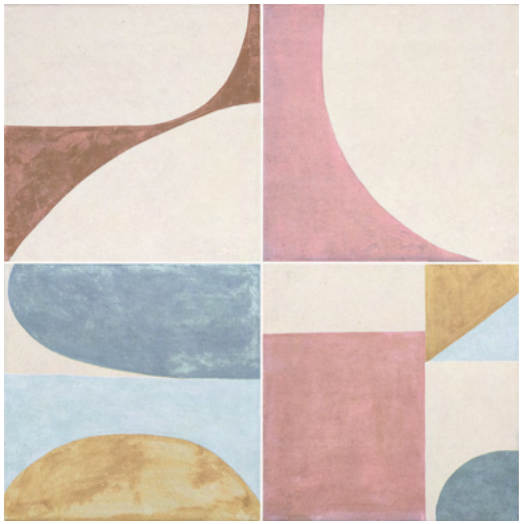

Art Multicolor

TECHNICAL INFORMATION		
CHARACTERISTICS	STANDARD	Declared ASTM
Water Absorption	ISO-10545/3	<=0.5%
Break Strength	ISO-10545/4	290 Lbs
Scratch Hardness	EN-101	5
Chemical Resistance	ISO-10545/13	Unaffected
Frost Resistance	ISO-10545/12	Resistant
Group	ISO-10545/7	4
Dynamic Coefficient of Friction (DCOF)	A137.1	>=0.42
Shade and Texture Rating	CTDA	V4
Facial Dimensions	ISO-10545/2	Pass
Range of Thickness	ISO-10545/2	Pass
Warpage	ISO-10545/2	Pass
Wedging	ISO-10545/2	Pass

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
8"x8"	12.92	30

Available Size

8"x8"

Roca

atlas II

technical porcelain

Atlas II Azul

M P V1 10 mm

Atlas II Aloe

Atlas II Azul

Atlas II Perla

Atlas II Marron

Atlas II Rojo

**12"x24" polished, 24"x24" polished & matte*

Available Sizes

12"x24"

24"x24"

TECHNICAL INFORMATION			
CHARACTERISTICS	STANDARD	Declared ASTM Matte	Declared ASTM Polished
Water Absorption	ISO-10545/3	<=0.1%	<=0.1%
Break Strength	ISO-10545/4	630 Lbs	630 Lbs
Scratch Hardness	EN-101	7	5
Chemical Resistance	ISO-10545/13	Unaffected	Unaffected
Frost Resistance	ISO-10545/12	Resistant	Resistant
Group	ISO-10545/7	4	3
Minimum Bond Strength (PSI)	C482		
Dynamic Coefficient of Friction (DCOF)	A137.1	>0.4 2	<=0.42
Shade and Texture Rating	CTDA	V1	V1
Facial Dimensions	ISO-10545/2	Pass	Pass
Range of Thickness	ISO-10545/2	Pass	Pass
Warpage	ISO-10545/2	Pass	Pass
Wedging	ISO-10545/2	Pass	Pass
PEI	C1027		

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
12"x24"	11.62	6
24"x24"	11.62	3

Roca

boho

ceramic wall

M V1 11 mm

Boho Blanco

TECHNICAL INFORMATION		
CHARACTERISTICS	**STANDARD**	**Declared ASTM**
Water Absorption	ISO-10545/3	>=0.10%
Break Strength	ISO-10545/4	135 Lbs
Scratch Hardness	EN-101	0
Chemical Resistance	ISO-10545/13	Unaffected
Shade and Texture Rating	CTDA	V1
Warpage	ISO-10545/2	Pass
Wedging	ISO-10545/2	Pass

PACKAGING INFORMATION		
	SF PER CARTON	PC PER CARTON
12"x36"	11.65	4

Available Size

12"x36"

Roca

bosco

color body porcelain & ceramic wall

Bosco Roble 8"x48" R

Bosco Vison 8"x48" R & Suite Bosco Vison 12"x24" R

Bosco Gris 8"x48" R

M V3 8.7 mm

Bosco Gris

Bosco Roble

Bosco Vison

Available Size

8"x48"

TECHNICAL INFORMATION		
CHARACTERISTICS	STANDARD	Declared ASTM
Water Absorption	ISO-10545/3	<=0.5%
Break Strength	ISO-10545/4	450 Lbs
Scratch Hardness	EN-101	6
Chemical Resistance	ISO-10545/13	Unaffected
Frost Resistance	ISO-10545/12	Resistant
Group	ISO-10545/7	4
Dynamic Coefficient of Friction (DCOF)	A137.1	>=0.42
Shade and Texture Rating	CTDA	V3
Facial Dimensions	ISO-10545/2	Pass
Range of Thickness	ISO-10545/2	Pass
Warpage	ISO-10545/2	Pass
Wedging	ISO-10545/2	Pass

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
8"x48"	10.12	4

M V3 9.4 mm

Suite Bosco Gris

Suite Bosco Roble

Suite Bosco Vison

Available Size

12"x24"

TECHNICAL INFORMATION		
CHARACTERISTICS	STANDARD	Declared ASTM
Water Absorption	ISO-10545/3	>10%
Break Strength	ISO-10545/4	N/A
Scratch Hardness	EN-101	-
Chemical Resistance	ISO-10545/13	Unaffected
Shade and Texture Rating	CTDA	V2
Warpage	ISO-10545/2	Pass
Wedging	ISO-10545/2	Pass

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
12"x24"	13.56	7

brick metallic

glazed porcelain

8.5 mm

Brick Metallic Cobre

Brick Metallic Iron

TECHNICAL INFORMATION		
CHARACTERISTICS	STANDARD	Declared ASTM
Water Absorption	ISO-10545/3	<=0.5%
Break Strength	ISO-10545/4	335 Lbs
Scratch Hardness	EN-101	5
Chemical Resistance	ISO-10545/13	Unaffected
Frost Resistance	ISO-10545/12	Resistant
Group	ISO-10545/7	2
Minimum Bond Strength (PSI)	C482	165
Dynamic Coefficient of Friction (DCOF)	A137.1	<0.40
Shade and Texture Rating	CTDA	V2
Facial Dimensions	ISO-10545/2	Pass
Range of Thickness	ISO-10545/2	Pass
Warpage	ISO-10545/2	Pass
Wedging	ISO-10545/2	Pass
PEI	C1027	2

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
3"x12"	10.98	46

Available Size

3"x12"

Roca

chalk

ceramic wall

Chalk Terracota 3"x12"

Chalk Blanco, Beige & Verde 3"x12"

Chalk Verde 3"x12"

Chalk Gris 3"x12"

M V1 9 mm

Chalk Blanco

Chalk Gris

Chalk Nude

Chalk Terracota

Chalk Verde

Chalk Beige

Available Sizes

3”x12”

TECHNICAL INFORMATION		
CHARACTERISTICS	STANDARD	Declared ASTM
Water Absorption	ISO-10545/3	>=0.10%
Break Strength	ISO-10545/4	250 Lbs
Scratch Hardness	EN-101	-
Chemical Resistance	ISO-10545/13	Unaffected
Shade and Texture Rating	CTDA	V1
Warpage	ISO-10545/2	Pass
Wedging	ISO-10545/2	Pass

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
3"x12"	6.03	25

Roca

continental hexagon

glazed porcelain

M V3 10 mm

Continental Hexagon Blanco

Continental Hexagon Arena

Continental Hexagon Gris



Continental Hexagon Grafito

TECHNICAL INFORMATION		
CHARACTERISTICS	STANDARD	Declared ASTM
Water Absorption	ISO-10545/3	<=0.5%
Break Strength	ISO-10545/4	247 Lbs
Scratch Hardness	EN-101	5
Chemical Resistance	ISO-10545/13	Unaffected
Frost Resistance	ISO-10545/12	Resistant
Group	ISO-10545/7	3
Minimum Bond Strength (PSI)	C482	-
Dynamic Coefficient of Friction (DCOF)	A137.1	>=0.42
Shade and Texture Rating	CTDA	V3
Facial Dimensions	ISO-10545/2	Pass
Range of Thickness	ISO-10545/2	Pass
Warpage	ISO-10545/2	Pass
Wedging	ISO-10545/2	Pass
PEI	C1027	3

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
10"x12"	14.53	18

Available Sizes

10"x12"

cotto

glazed & polished porcelain

M P V4 7 mm

Cotto Verde

Cotto Rosso

TECHNICAL INFORMATION			
CHARACTERISTICS	STANDARD	Declared ASTM Soft Touch	Declared ASTM Polished
Water Absorption	ISO-10545/3	<=0.5%	<=0.5%
Break Strength	ISO-10545/4	200 Lbs	200 Lbs
Scratch Hardness	EN-101	3	3
Chemical Resistance	ISO-10545/13	Unaffected	Unaffected
Frost Resistance	ISO-10545/12	Resistant	Resistant
Group	ISO-10545/7	3	3
Minimum Bond Strength (PSI)	C482	165	165
Dynamic Coefficient of Friction (DCOF)	A137.1	<0.40	<0.40
Shade and Texture Rating	CTDA	V4	V4
Facial Dimensions	ISO-10545/2	Pass	Pass
Range of Thickness	ISO-10545/2	Pass	Pass
Warpage	ISO-10545/2	Pass	Pass
Wedging	ISO-10545/2	Pass	Pass
PEI	C1027	3	3

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
48”x48”	30.68	2

Available Sizes

48”x48”

dimensions block

ceramic wall

M V2 34 mm

Block Gold



Block Rust



Block Oxide

TECHNICAL INFORMATION		
CHARACTERISTICS	STANDARD	Declared ASTM
Water Absorption	ISO-10545/3	>=0.10%
Break Strength	ISO-10545/4	135 Lbs
Scratch Hardness	EN-101	0
Chemical Resistance	ISO-10545/13	Unaffected
Shade and Texture Rating	CTDA	V2
Warpage	ISO-10545/2	Pass
Wedging	ISO-10545/2	Pass

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
6"x6"	4.59	18

Available Sizes

6"x6"

district

color body porcelain

District Caldera

M V2 9+ mm

District Gris

District Caldera

District Negro

Available Sizes

20”x40”
24”x24”
24”x48”
40”x40”

TECHNICAL INFORMATION		
CHARACTERISTICS	STANDARD	Declared ASTM
Water Absorption	ISO-10545/3	<=0.5%
Break Strength	ISO-10545/4	290 Lbs
Scratch Hardness	EN-101	5
Chemical Resistance	ISO-10545/13	Unaffected
Frost Resistance	ISO-10545/12	Resistant
Group	ISO-10545/7	3
Minimum Bond Strength (PSI)	C482	
Dynamic Coefficient of Friction (DCOF)	A137.1	>=0.42
Shade and Texture Rating	CTDA	V2
Facial Dimensions	ISO-10545/2	Pass
Range of Thickness	ISO-10545/2	Pass
Warpage	ISO-10545/2	Pass
Wedging	ISO-10545/2	Pass
PEI	C1027	3 (Gris) | 2 (Caldera & Negro)

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
20”x40”	16.14	3
24”x24”	11.62	3
24”x48”	15.49	2
40”x40”	21.52	2

ferro

color body porcelain

Ferro Silver

M V2 10+ mm

Ferro Silver

Ferro Brown

Ferro Steel

Available Sizes

12”x24”

24”x24”

24”x48”

TECHNICAL INFORMATION		
CHARACTERISTICS	STANDARD	Declared ASTM
Water Absorption	ISO-10545/3	<=0.5%
Break Strength	ISO-10545/4	290 Lbs
Scratch Hardness	EN-101	5
Chemical Resistance	ISO-10545/13	Unaffected
Frost Resistance	ISO-10545/12	Resistant
Group	ISO-10545/7	3
Minimum Bond Strength (PSI)	C482	
Dynamic Coefficient of Friction (DCOF)	A137.1	>=0.42
Shade and Texture Rating	CTDA	V2
Facial Dimensions	ISO-10545/2	Pass
Range of Thickness	ISO-10545/2	Pass
Warpage	ISO-10545/2	Pass
Wedging	ISO-10545/2	Pass
PEI	C1027	3 (Silver) & 2 (Brown & Steel)

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
12”X24”	11.62	6
24”X24”	11.62	3
24”X48”	15.49	2

Roca

flow

ceramic wall

B V3 7.3 mm

Flow Night Fall

Flow Ocean Storm

Flow Spirit Blue

Flow Neo Mint

Flow Purple Dusk

Flow Lilac Sand

Flow Loganberry

Flow Mist Gray

Flow Vivid Orange

Flow Solar Orange

Available Size

3”x12”

TECHNICAL INFORMATION		
CHARACTERISTICS	STANDARD	Declared ASTM
Water Absorption	ISO-10545/3	>=0.10%
Break Strength	ISO-10545/4	135 Lbs
Scratch Hardness	EN-101	N/A
Chemical Resistance	ISO-10545/13	Unaffected
Shade and Texture Rating	CTDA	V3
Warpage	ISO-10545/2	Pass
Wedging	ISO-10545/2	Pass

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
3”x12”	12.64	50

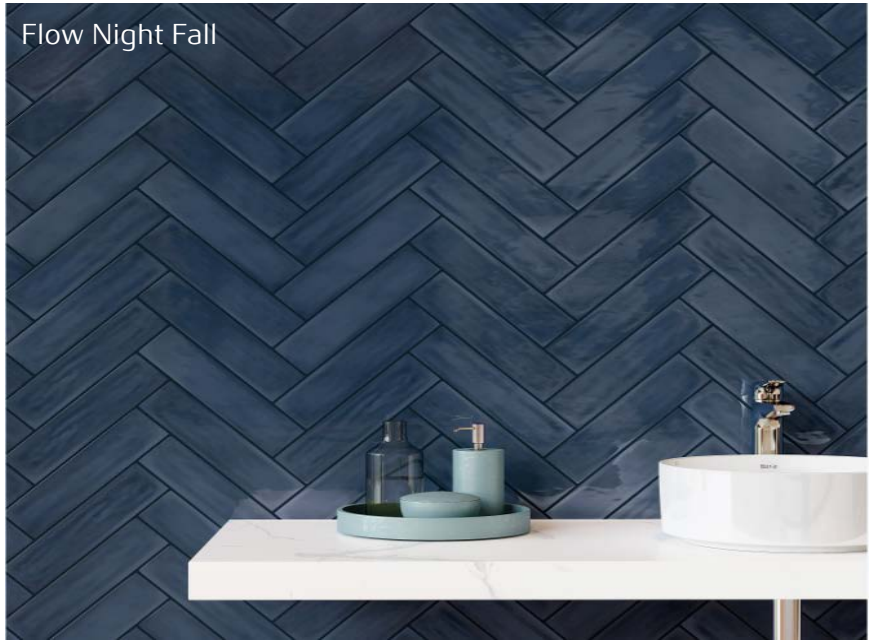

force

glazed porcelain

Force Metal & Force Crema

Force Caldera & Force Perla

M V2 10+ mm

Force Crema

Force Metal

Force Perla

Force Caldera

Force Titanio

Available Sizes

12"x36"
Wall Only

24"x24"

24"x48"

36"x36"

TECHNICAL INFORMATION			
CHARACTERISTICS	STANDARD	Declared ASTM Floor	Declared ASTM Wall
Water Absorption	ISO-10545/3	<=0.5%	<=0.10%
Break Strength	ISO-10545/4	290 Lbs	135 Lbs
Scratch Hardness	EN-101	6	
Chemical Resistance	ISO-10545/13	Unaffected	Unaffected
Frost Resistance	ISO-10545/12	Resistant	
Group	ISO-10545/7	4	N/A
Minimum Bond Strength (PSI)	C482		
Dynamic Coefficient of Friction (DCOF)	A137.1	>=0.42	
Shade and Texture Rating	CTDA	V2	V2
Facial Dimensions	ISO-10545/2	Pass	Pass
Range of Thickness	ISO-10545/2	Pass	Pass
Warpage	ISO-10545/2	Pass	Pass
Wedging	ISO-10545/2	Pass	Pass
PEI	C1027	4	

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
12"x36" (wall only)	14.53	5
24"x24"	11.62	3
24"x48"	15.49	2
36"x36"	17.43	2

Roca

forma

ceramic wall

M V1 8.5 mm

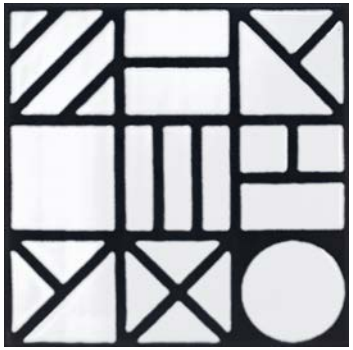

Forma Black & White

Forma Black

TECHNICAL INFORMATION		
CHARACTERISTICS	STANDARD	Declared ASTM
Water Absorption	ISO-10545/3	>=0.10%
Break Strength	ISO-10545/4	250 Lbs
Scratch Hardness	EN-101	0
Chemical Resistance	ISO-10545/13	Unaffected
Shade and Texture Rating	CTDA	V1
Warpage	ISO-10545/2	Pass
Wedging	ISO-10545/2	Pass

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
8.5”x8.5”	7.97	16

Available Sizes

8.5”x8.5”

gatsby

ceramic wall

M V1 8.5 mm

Gatsby White

Gatsby White-Pearl

Gatsby White-Chrome

Gatsby Black

Gatsby Black-Pearl



Gatsby Black-Chrome

Available Sizes

8.5"x8.5"

TECHNICAL INFORMATION		
CHARACTERISTICS	STANDARD	Declared ASTM
Water Absorption	ISO-10545/3	>=0.10%
Break Strength	ISO-10545/4	250 Lbs
Scratch Hardness	EN-101	0
Chemical Resistance	ISO-10545/13	Unaffected
Shade and Texture Rating	CTDA	V1
Warpage	ISO-10545/2	Pass
Wedging	ISO-10545/2	Pass

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
8.5"x8.5"	7.97	16

grain

glazed porcelain

Grain Roble

Grain Bianco

M V3 10.5 mm

Grain Natural

Grain Miele

Grain Roble

Grain Taupe

Grain Grey

Grain Bianco

Available Sizes

8"x48"

TECHNICAL INFORMATION		
CHARACTERISTICS	STANDARD	Declared ASTM
Water Absorption	ISO-10545/3	<=0.5%
Break Strength	ISO-10545/4	290 Lbs
Scratch Hardness	EN-101	7
Chemical Resistance	ISO-10545/13	Unaffected
Frost Resistance	ISO-10545/12	Resistant
Group	ISO-10545/7	4
Minimum Bond Strength (PSI)	C482	
Dynamic Coefficient of Friction (DCOF)	A137.1	>=0.42
Shade and Texture Rating	CTDA	V3
Facial Dimensions	ISO-10545/2	Pass
Range of Thickness	ISO-10545/2	Pass
Warpage	ISO-10545/2	Pass
Wedging	ISO-10545/2	Pass
PEI	C1027	4

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
8"x48"	12.91	5

hangar

glazed porcelain

M ABS V3 7 mm

Hangar Cement

TECHNICAL INFORMATION			
CHARACTERISTICS	STANDARD	Declared ASTM Matte	Declared ASTM ABS
Water Absorption	ISO-10545/3	<=0.5%	<=0.5%
Break Strength	ISO-10545/4	330 Lbs	330 Lbs
Scratch Hardness	EN-101	4	7
Chemical Resistance	ISO-10545/13	Unaffected	Unaffected
Frost Resistance	ISO-10545/12	Resistant	Resistant
Group	ISO-10545/7	3	4
Minimum Bond Strength (PSI)	C482	165	165
Dynamic Coefficient of Friction (DCOF)	A137.1	<0.40	>0.42
Shade and Texture Rating	CTDA	V3	V3
Facial Dimensions	ISO-10545/2	Pass	Pass
Range of Thickness	ISO-10545/2	Pass	Pass
Warpage	ISO-10545/2	Pass	Pass
Wedging	ISO-10545/2	Pass	Pass
PEI	C1027	3	4

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
48”x48”	30.68	2

Available Sizes

48”x48”

Roca

hedra

glazed porcelain

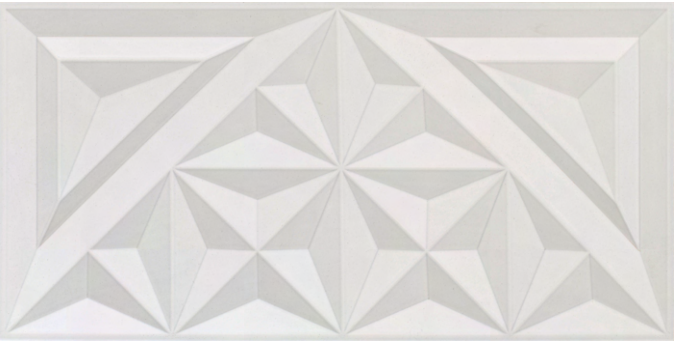

Hedra White

TECHNICAL INFORMATION		
CHARACTERISTICS	STANDARD	Declared ASTM
Water Absorption	ISO-10545/3	<=0.5%
Break Strength	ISO-10545/4	335 Lbs
Scratch Hardness	EN-101	4
Chemical Resistance	ISO-10545/13	Unaffected
Frost Resistance	ISO-10545/12	Resistant
Group	ISO-10545/7	3
Minimum Bond Strength (PSI)	C482	165
Dynamic Coefficient of Friction (DCOF)	A137.1	<0.40
Shade and Texture Rating	CTDA	V3
Facial Dimensions	ISO-10545/2	Pass
Range of Thickness	ISO-10545/2	Pass
Warpage	ISO-10545/2	Pass
Wedging	ISO-10545/2	Pass
PEI	C1027	3

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
12”x24”	7.75	4

Available Size

12”x24

Roca

hotel

ceramic wall

M V3 10 mm

Hotel Blanco

Hotel Beige

Hotel Vison

TECHNICAL INFORMATION		
CHARACTERISTICS	STANDARD	Declared ASTM
Water Absorption	ISO-10545/3	>10%
Break Strength	ISO-10545/4	N/A
Scratch Hardness	EN-101	-
Chemical Resistance	ISO-10545/13	Unaffected
Shade and Texture Rating	CTDA	V3
Warpage	ISO-10545/2	Pass
Wedging	ISO-10545/2	Pass

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
12"x36"	14.56	5

Available Size

12"x36"

M V3 10 mm

Suite Hotel Blanco

Suite Hotel Beige

Suite Hotel Vison

TECHNICAL INFORMATION		
CHARACTERISTICS	STANDARD	Declared ASTM
Water Absorption	ISO-10545/3	>10%
Break Strength	ISO-10545/4	N/A
Scratch Hardness	EN-101	-
Chemical Resistance	ISO-10545/13	Unaffected
Shade and Texture Rating	CTDA	V3
Warpage	ISO-10545/2	Pass
Wedging	ISO-10545/2	Pass

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
12"x36"	14.56	5

Available Size

12"x36"

Roca

indiana

color body porcelain

Indiana Roble 8"x48" R

Indiana Nocce 8"x48" R

Indiana Roble 8"x48" R

M V3 8.7 mm

Indiana Roble

Indiana Nocce

Indiana Natural

TECHNICAL INFORMATION		
CHARACTERISTICS	STANDARD	Declared ASTM
Water Absorption	ISO-10545/3	<=0.5%
Break Strength	ISO-10545/4	337 Lbs
Scratch Hardness	EN-101	6
Chemical Resistance	ISO-10545/13	Unaffected
Frost Resistance	ISO-10545/12	Resistant
Group	ISO-10545/7	4
Dynamic Coefficient of Friction (DCOF)	A137.1	>=0.42
Shade and Texture Rating	CTDA	V3
Facial Dimensions	ISO-10545/2	Pass
Range of Thickness	ISO-10545/2	Pass
Warpage	ISO-10545/2	Pass
Wedging	ISO-10545/2	Pass

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
8"x48"	10.12	4

Available Sizes

8"x48"

limestone

glazed porcelain

Limestone Arena

Limestone Vison

M V3 8.7 mm

Limestone Blanco

Limestone Arena

Limestone Gris

Limestone Vison

TECHNICAL INFORMATION		
CHARACTERISTICS	STANDARD	Declared ASTM
Water Absorption	ISO-10545/3	<=0.5%
Break Strength	ISO-10545/4	290 Lbs
Scratch Hardness	EN-101	5
Chemical Resistance	ISO-10545/13	Unaffected
Frost Resistance	ISO-10545/12	Resistant
Group	ISO-10545/7	4
Minimum Bond Strength (PSI)	C482	
Dynamic Coefficient of Friction (DCOF)	A137.1	<=0.42
Shade and Texture Rating	CTDA	V3
Facial Dimensions	ISO-10545/2	Pass
Range of Thickness	ISO-10545/2	Pass
Warpage	ISO-10545/2	Pass
Wedging	ISO-10545/2	Pass
PEI	C1027	4

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
24"X24"	11.625	3

Available Sizes

24"x24"

lithus

glazed porcelain

M ABS V3 10 mm

Lithus Black

TECHNICAL INFORMATION			
CHARACTERISTICS	STANDARD	Declared ASTM Matte	Declared ASTM ABS
Water Absorption	ISO-10545/3	<=0.5%	<=0.5%
Break Strength	ISO-10545/4	335 Lbs	335 Lbs
Scratch Hardness	EN-101	4	8
Chemical Resistance	ISO-10545/13	Unaffected	Unaffected
Frost Resistance	ISO-10545/12	Resistant	Resistant
Group	ISO-10545/7	3	4
Minimum Bond Strength (PSI)	C482	165	165
Dynamic Coefficient of Friction (DCOF)	A137.1	<0.40	>0.42
Shade and Texture Rating	CTDA	V3	V3
Facial Dimensions	ISO-10545/2	Pass	Pass
Range of Thickness	ISO-10545/2	Pass	Pass
Warpage	ISO-10545/2	Pass	Pass
Wedging	ISO-10545/2	Pass	Pass
PEI	C1027	3	4

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
35”x35”	17.44	2
3”x12”	10.98	**46**

Available Sizes

35”x35

3”x12”

luthier

glazed porcelain

8.5 mm

Luthier Metallic

TECHNICAL INFORMATION		
CHARACTERISTICS	STANDARD	Declared ASTM
Water Absorption	ISO-10545/3	<=0.5%
Break Strength	ISO-10545/4	335 Lbs
Scratch Hardness	EN-101	4
Chemical Resistance	ISO-10545/13	Unaffected
Frost Resistance	ISO-10545/12	Resistant
Group	ISO-10545/7	2
Minimum Bond Strength (PSI)	C482	165
Dynamic Coefficient of Friction (DCOF)	A137.1	<0.40
Shade and Texture Rating	CTDA	V2
Facial Dimensions	ISO-10545/2	Pass
Range of Thickness	ISO-10545/2	Pass
Warpage	ISO-10545/2	Pass
Wedging	ISO-10545/2	Pass
PEI	C1027	2

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
12”x12”	9.69	10

Available Sizes

12”x12”

mob

ceramic wall

M B V1 9.8 mm

Mob White

Mob Fendi
*Matte only

Mob Black

Different Faces

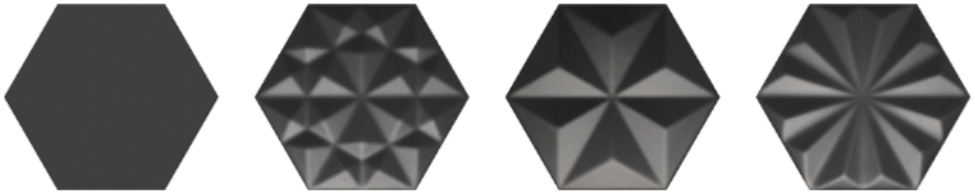

TECHNICAL INFORMATION		
CHARACTERISTICS	STANDARD	Declared ASTM
Water Absorption	ISO-10545/3	>=0.10%
Break Strength	ISO-10545/4	135 Lbs
Scratch Hardness	EN-101	0
Chemical Resistance	ISO-10545/13	Unaffected
Shade and Texture Rating	CTDA	V1
Warpage	ISO-10545/2	Pass
Wedging	ISO-10545/2	Pass

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
6"x7"	8.07	38

Available Size



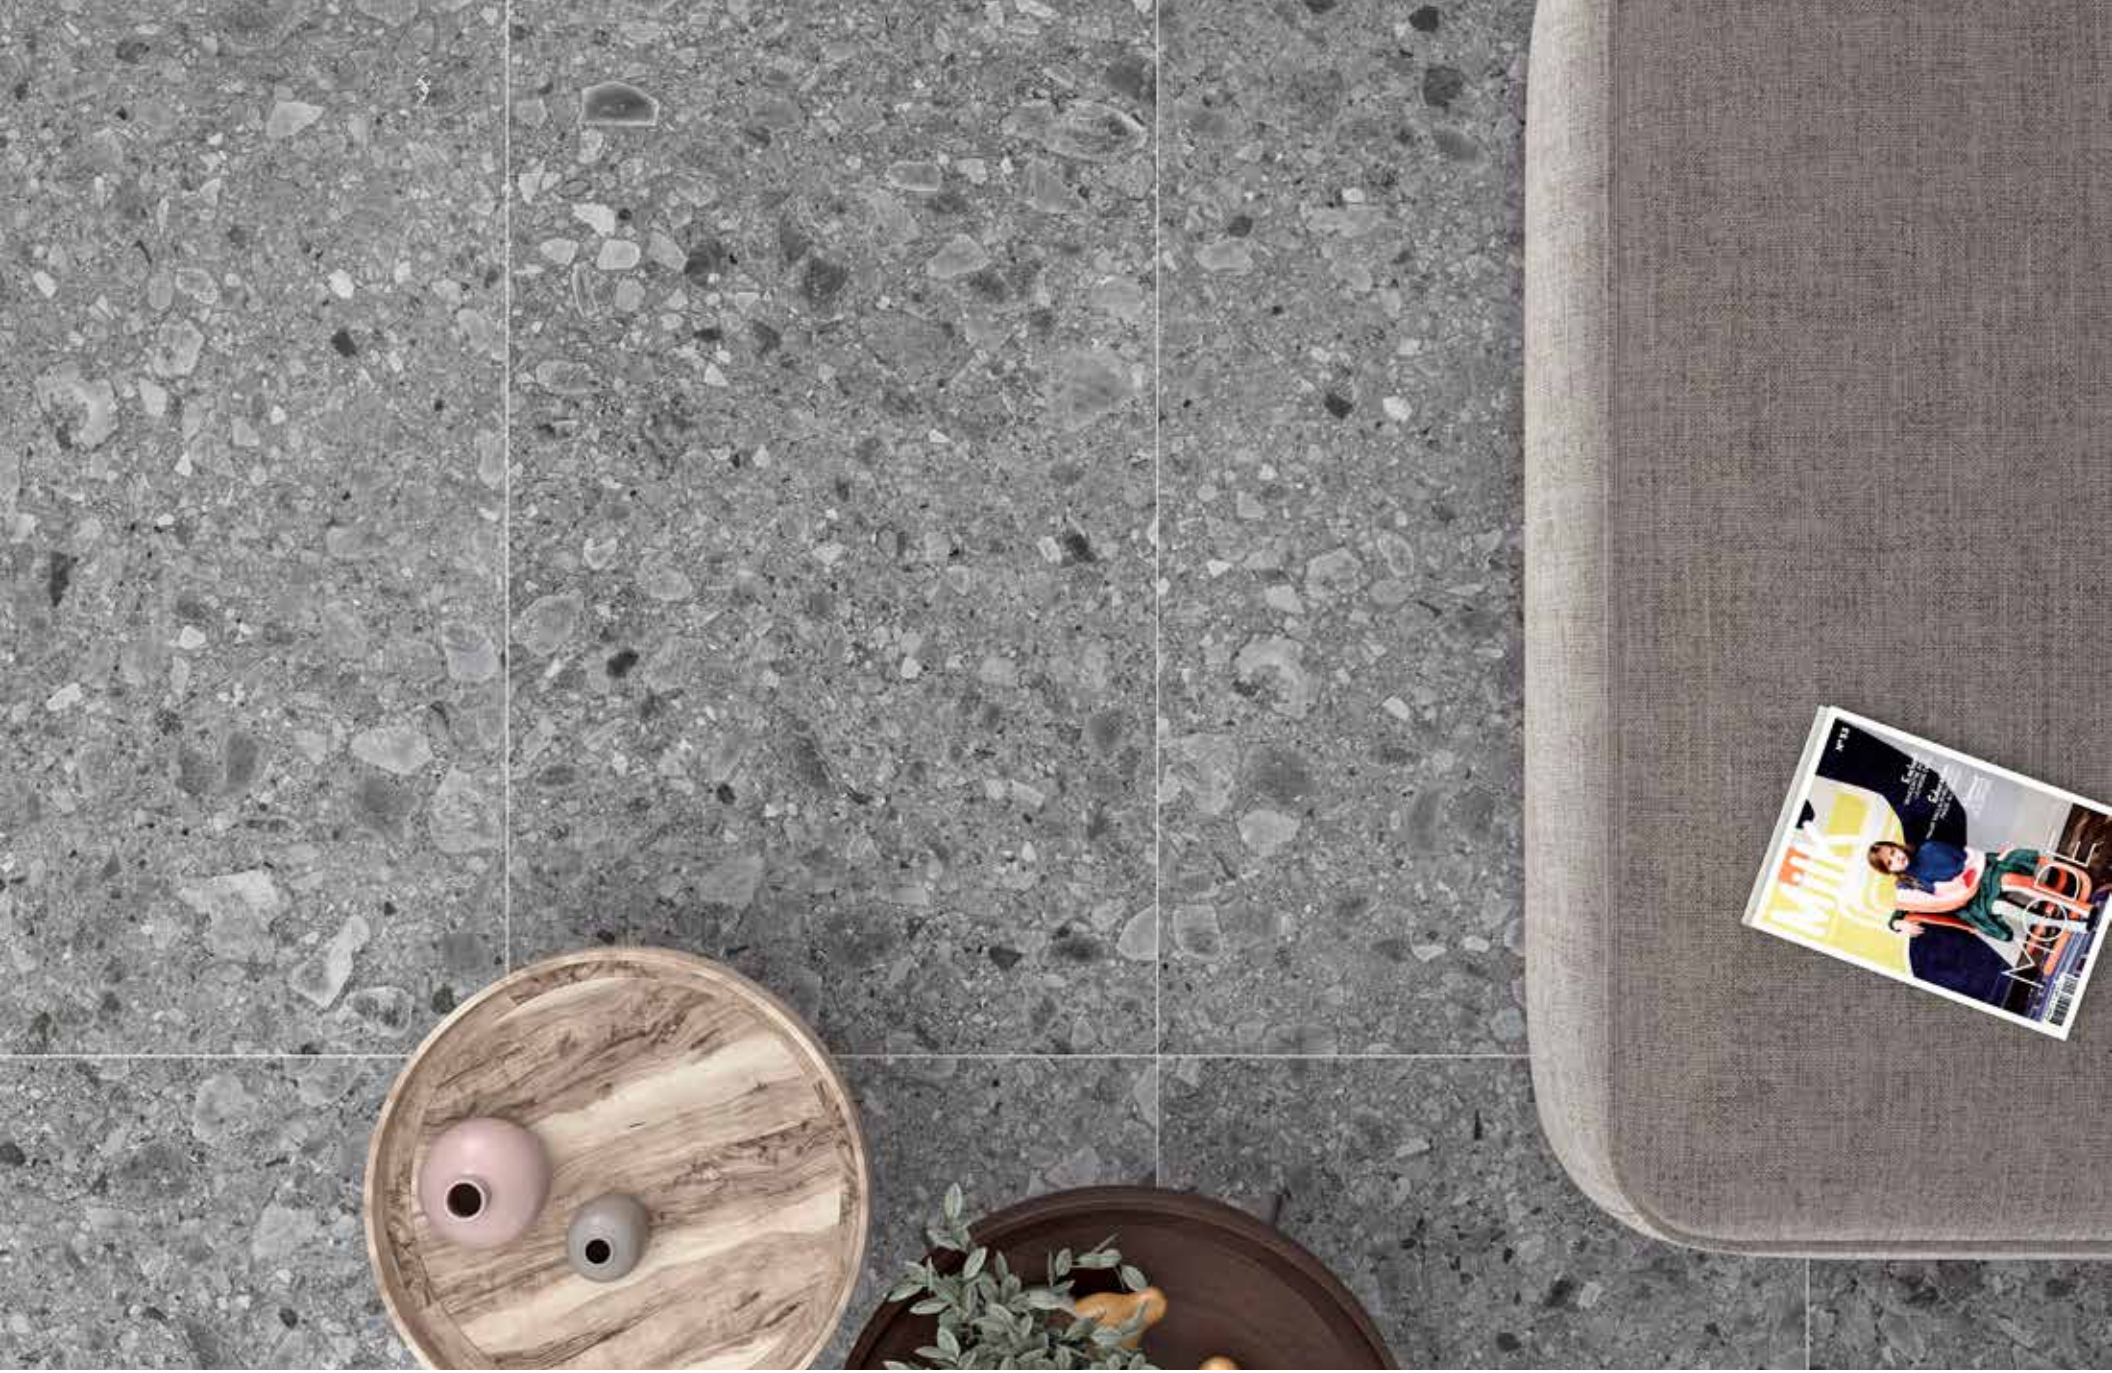

mood

color body porcelain

Mood Black

Mood Light Grey

M V3 10+ mm

Mood Snow

Mood Dark Grey

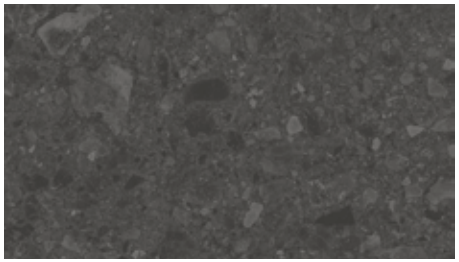

Mood Black

Mood White

Mood Beige

Mood Light Grey

Available Sizes

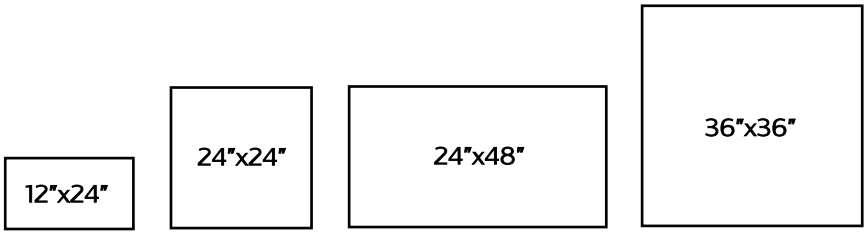

TECHNICAL INFORMATION		
CHARACTERISTICS	STANDARD	Declared ASTM
Water Absorption	ISO-10545/3	<=0.5%
Break Strength	ISO-10545/4	290 Lbs
Scratch Hardness	EN-101	9
Chemical Resistance	ISO-10545/13	Unaffected
Frost Resistance	ISO-10545/12	Resistant
Group	ISO-10545/7	4
Minimum Bond Strength (PSI)	C482	
Dynamic Coefficient of Friction (DCOF)	A137.1	>=0.42
Shade and Texture Rating	CTDA	V3
Facial Dimensions	ISO-10545/2	Pass
Range of Thickness	ISO-10545/2	Pass
Warpage	ISO-10545/2	Pass
Wedging	ISO-10545/2	Pass
PEI	C1027	4

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
12"x24"	11.62	6
24"x24"	11.62	3
24"x48"	15.49	2
36"x36"	17.43	2

natur

glazed porcelain

Natur Light Grey

M V2 8.7 mm

Natur White

Natur Suite White

Natur Beige

Natur Suite Beige

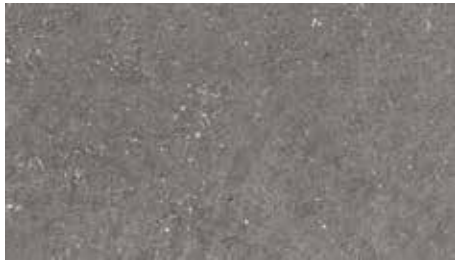

Natur Light Grey

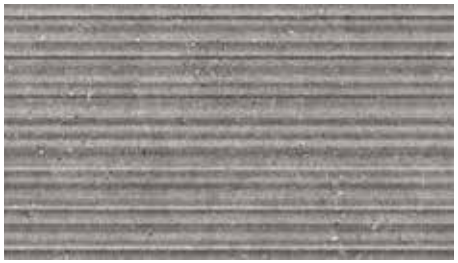

Natur Suite Light Grey

Available Sizes | Wall

12"x36"

TECHNICAL INFORMATION		
CHARACTERISTICS	STANDARD	Declared ASTM
Water Absorption	ISO-10545/3	>10%
Break Strength	ISO-10545/4	135 Lbs
Scratch Hardness	EN-101	
Chemical Resistance	ISO-10545/13	Unaffected
Frost Resistance	ISO-10545/12	Resistant
Group	ISO-10545/7	N/A
Minimum Bond Strength (PSI)	C482	
Dynamic Coefficient of Friction (DCOF)	A137.1	
Shade and Texture Rating	CTDA	V2
Facial Dimensions	ISO-10545/2	Pass
Range of Thickness	ISO-10545/2	Pass
Warpage	ISO-10545/2	Pass
Wedging	ISO-10545/2	Pass
PEI	C1027	

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
12"x36"	14.53	5

M V2 10+ mm

Natur White

Natur Beige

Natur Light Grey

Natur Dark Grey

Natur Snow

Natur Black

Available Sizes | Floor

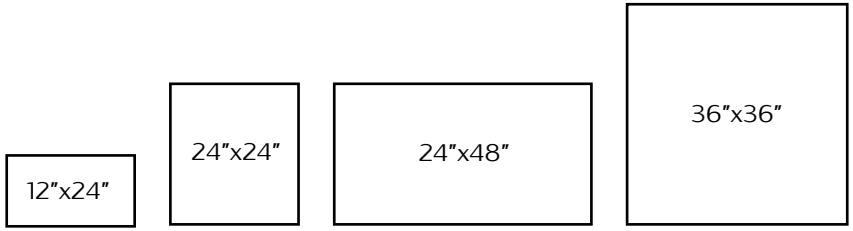

TECHNICAL INFORMATION		
CHARACTERISTICS	STANDARD	Declared ASTM
Water Absorption	ISO-10545/3	<=0.5%
Break Strength	ISO-10545/4	290 Lbs
Scratch Hardness	EN-101	9
Chemical Resistance	ISO-10545/13	Unaffected
Frost Resistance	ISO-10545/12	Resistant
Group	ISO-10545/7	3
Minimum Bond Strength (PSI)	C482	
Dynamic Coefficient of Friction (DCOF)	A137.1	>=0.42
Shade and Texture Rating	CTDA	V2
Facial Dimensions	ISO-10545/2	Pass
Range of Thickness	ISO-10545/2	Pass
Warpage	ISO-10545/2	Pass
Wedging	ISO-10545/2	Pass
PEI	C1027	3

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
12”x24”	11.62	6
24”x24”	11.62	3
24”x48”	15.49	2
36”x36”	17.43	2

Roca

orion II

technical porcelain

Orion II Nieve

M P V3 11 mm

Orion II Blanco

Orion II Perla

Orion II Crema

Orion II Beige



Orion II Grafito

Orion II Charcoal

Available Sizes

12"x24"

24"x24"

TECHNICAL INFORMATION			
CHARACTERISTICS	STANDARD	Declared ASTM Matte	Declared ASTM Polished
Water Absorption	ISO-10545/3	<=0.1%	<=0.1%
Break Strength	ISO-10545/4	630 Lbs	550 Lbs
Scratch Hardness	EN-101	7	5
Chemical Resistance	ISO-10545/13	Unaffected	Unaffected
Frost Resistance	ISO-10545/12	Resistant	Resistant
Group	ISO-10545/7	4	3
Minimum Bond Strength (PSI)	C482		
Dynamic Coefficient of Friction (DCOF)	A137.1	>0.4 2	<=0.42
Shade and Texture Rating	CTDA	V3	V3
Facial Dimensions	ISO-10545/2	Pass	Pass
Range of Thickness	ISO-10545/2	Pass	Pass
Warpage	ISO-10545/2	Pass	Pass
Wedging	ISO-10545/2	Pass	Pass
PEI	C1027		

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
12"x24"	11.62	6
24"x24"	11.62	3

Roca

pavers

full body porcelain stoneware

M V3 20 mm

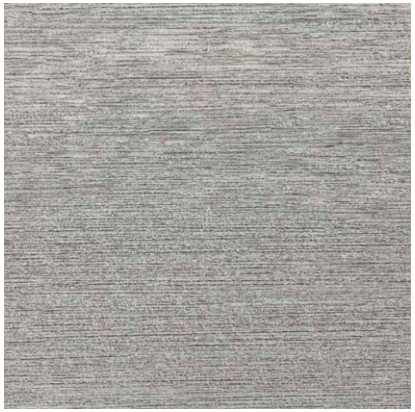

Pavers Highland Gray

Pavers Aspen Mocha

Pavers Aspen Charcoal

Pavers Terrain Gray

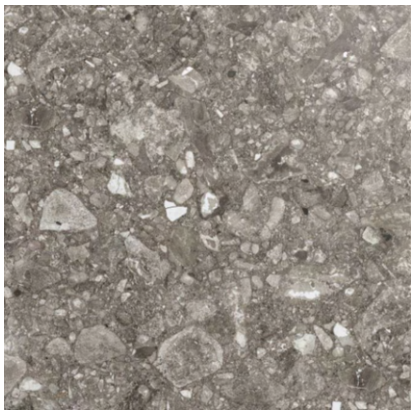

Pavers Terrain Mocha

TECHNICAL INFORMATION		
CHARACTERISTICS	STANDARD	Declared ASTM
Water Absorption	ISO-10545/3	<=0.1%
Break Strength	ISO-10545/4	2,200 Lbs
Scratch Hardness	EN-101	5
Chemical Resistance	ISO-10545/13	Unaffected
Frost Resistance	ISO-10545/12	Resistant
Group	ISO-10545/7	-
Minimum Bond Strength (PSI)	C482	Pass
Dynamic Coefficient of Friction (DCOF)	A137.1	>=0.42
Shade and Texture Rating	CTDA	V3
Facial Dimensions	ISO-10545/2	Pass
Range of Thickness	ISO-10545/2	Pass
Warpage	ISO-10545/2	Pass
Wedging	ISO-10545/2	Pass
PEI	C1027	4

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
24"x24"	7.75	2

Available Sizes

24"x24"

Roca

pigment

glazed & polished porcelain

Pigment Multicolor

Pigment Multicolor

8.7 mm

Pigment Multicolor

TECHNICAL INFORMATION		
CHARACTERISTICS	STANDARD	Declared ASTM Polished
Water Absorption	ISO-10545/3	<=0.1%
Break Strength	ISO-10545/4	630 Lbs
Scratch Hardness	EN-101	5
Chemical Resistance	ISO-10545/13	Unaffected
Frost Resistance	ISO-10545/12	Resistant
Group	ISO-10545/7	4
Minimum Bond Strength (PSI)	C482	
Dynamic Coefficient of Friction (DCOF)	A137.1	<=0.42
Shade and Texture Rating	CTDA	V3
Facial Dimensions	ISO-10545/2	Pass
Range of Thickness	ISO-10545/2	Pass
Warpage	ISO-10545/2	Pass
Wedging	ISO-10545/2	Pass
PEI	C1027	

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
32”x32	13.778	2

Available Sizes

32”x32”

Roca

rockart +

marble

8 mm

Tulip
12"x12" Marble Mosaic



Thassos-Carrara
14"x10" Marble Mosaic

Large Basketweave
12"x12" Marble Mosaic

Calacatta Gold Oval
12"x11" Marble Mosaic

Lantern
9"x10" Marble Mosaic

Thassos-Calacatta
13"x14" Marble Mosaic

Calacatta Gold & Metal
11"x10" Marble Mosaic

Calacatta Gold & Metal Hex
11"x14" Marble Mosaic

Elongated Hexagon
12"x14" Marble Mosaic

Shell
12"x12" Marble Mosaic

TECHNICAL INFORMATION	
Recommended Traffic	Residential
Floor / Wall Use	Wall

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
Tulip	10.00	10
Thassos-Carrara	4.86	5
Lantern	3.02	5
Thassos-Calacatta	5.71	5
Elongated Hexagon	5.83	5
Shell & Large Basketweave	5.00	5
Calacatta Gold Oval	4.75	5
Calacatta Gold & Metal	3.92	5
Calacatta Gold & Metal Hex	5.69	5

Available Sizes

12"x12"	12"x11"	13"x14"	11"x14"
14"x10"	9"x10"	11"x10"	12"x14"

rockart scales

recycled glass

6 mm



Scales Gris



Scales Rosa



Scales Marino



Scales Verde



Scales Terracota



Scales Ocre

Available Sizes

11”x12”

TECHNICAL INFORMATION	
Recommended Traffic	Residential
Floor / Wall Use	Both

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
11”x12	10.44	11

Roca

room

ceramic wall

M V1 10 mm

Room Blanco

Suite Room Blanco

TECHNICAL INFORMATION		
CHARACTERISTICS	STANDARD	Declared ASTM
Water Absorption	ISO-10545/3	>10%
Break Strength	ISO-10545/4	N/A
Scratch Hardness	EN-101	-
Chemical Resistance	ISO-10545/13	Unaffected
Shade and Texture Rating	CTDA	V1
Warpage	ISO-10545/2	Pass
Wedging	ISO-10545/2	Pass

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
12"x36"	14.56	5

Available Size

12"x36"

Roca

sense

ceramic wall

B V2 8.5 mm

Sense Atoll Blue

Sense Neo Mint

Sense Velvet Pink

Sense White

TECHNICAL INFORMATION		
CHARACTERISTICS	STANDARD	Declared ASTM
Water Absorption	ISO-10545/3	>=0.10%
Break Strength	ISO-10545/4	135 Lbs
Scratch Hardness	EN-101	0
Chemical Resistance	ISO-10545/13	Unaffected
Shade and Texture Rating	CTDA	V2
Warpage	ISO-10545/2	Pass
Wedging	ISO-10545/2	Pass

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
6"x6"	10.01	20

* 4 patterns randomly repeated in box

Available Size

8.5"x8.5"

silvertone

glazed porcelain

Silvertone Taupe

Silvertone Mud

M V2 9+ mm

Silvertone Marfil

Silvertone Taupe

Silvertone Gris

Silvertone Beige

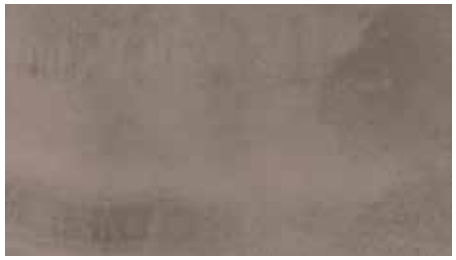

Silvertone Mud

Available Sizes

12"x24"

24"x24"

24"x48"

TECHNICAL INFORMATION		
CHARACTERISTICS	STANDARD	Declared ASTM
Water Absorption	ISO-10545/3	<=0.5%
Break Strength	ISO-10545/4	290 Lbs
Scratch Hardness	EN-101	6
Chemical Resistance	ISO-10545/13	Unaffected
Frost Resistance	ISO-10545/12	Resistant
Group	ISO-10545/7	4
Minimum Bond Strength (PSI)	C482	
Dynamic Coefficient of Friction (DCOF)	A137.1	>=0.42
Shade and Texture Rating	CTDA	V2
Facial Dimensions	ISO-10545/2	Pass
Range of Thickness	ISO-10545/2	Pass
Warpage	ISO-10545/2	Pass
Wedging	ISO-10545/2	Pass
PEI	C1027	4

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
12"X24"	11.62	6
24"X24"	11.62	3
24"X48"	15.49	2

Terre

glazed porcelain

Terre Grafito

Terre Gris

M V3 8.7 mm

Terre Blanco

Terre Gris

Terre Beige

Terre Grafito

TECHNICAL INFORMATION		
CHARACTERISTICS	STANDARD	Declared ASTM
Water Absorption	ISO-10545/3	<=0.5%
Break Strength	ISO-10545/4	290 Lbs
Scratch Hardness	EN-101	7
Chemical Resistance	ISO-10545/13	Unaffected
Frost Resistance	ISO-10545/12	Resistant
Group	ISO-10545/7	4
Minimum Bond Strength (PSI)	C482	
Dynamic Coefficient of Friction (DCOF)	A137.1	<=0.42
Shade and Texture Rating	CTDA	V3
Facial Dimensions	ISO-10545/2	Pass
Range of Thickness	ISO-10545/2	Pass
Warpage	ISO-10545/2	Pass
Wedging	ISO-10545/2	Pass
PEI	C1027	5

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
12”x24”	13.563	7
24”x24”	10.656	5
24”x48”	14.531	5

Available Sizes

12”x24”

24”x24”

24”x48”

M V2 10 mm

Terre Suite Blanco

Terre Suite Gris

Terre Suite Beige

Terre Suite Grafito

TECHNICAL INFORMATION		
CHARACTERISTICS	**STANDARD**	**Declared ASTM**
Water Absorption	ISO-10545/3	>10%
Break Strength	ISO-10545/4	N/A
Scratch Hardness	EN-101	-
Chemical Resistance	ISO-10545/13	Unaffected
Shade and Texture Rating	CTDA	V2
Warpage	ISO-10545/2	Pass
Wedging	ISO-10545/2	Pass

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
12"x36"	14.53	5

Available Sizes

12"x36"

8.7 mm

Terre Deko Gris

Terre Deko Beige

TECHNICAL INFORMATION		
CHARACTERISTICS	**STANDARD**	**Declared ASTM**
Water Absorption	ISO-10545/3	>10%
Break Strength	ISO-10545/4	N/A
Scratch Hardness	EN-101	-
Chemical Resistance	ISO-10545/13	Unaffected
Shade and Texture Rating	CTDA	V2
Warpage	ISO-10545/2	Pass
Wedging	ISO-10545/2	Pass

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
12"x36"	14.53	5

Available Sizes

12"x36"

tissue

ceramic wall

12 mm

Tissue Black

TECHNICAL INFORMATION		
CHARACTERISTICS	**STANDARD**	**Declared ASTM**
Water Absorption	ISO-10545/3	>=0.10%
Break Strength	ISO-10545/4	135 Lbs
Scratch Hardness	EN-101	0
Chemical Resistance	ISO-10545/13	Unaffected
Shade and Texture Rating	CTDA	V1
Warpage	ISO-10545/2	Pass
Wedging	ISO-10545/2	Pass

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
16"x48"	20.67	4

Available Size

16"x48"

vulcano

glazed & polished porcelain

M P V3 10 mm

Vulcano Cobre

TECHNICAL INFORMATION			
CHARACTERISTICS	STANDARD	Declared ASTM Matte	Declared ASTM Polished
Water Absorption	ISO-10545/3	<=0.5%	<=0.5%
Break Strength	ISO-10545/4	300 Lbs	335 Lbs
Scratch Hardness	EN-101	5	4
Chemical Resistance	ISO-10545/13	Unaffected	Unaffected
Frost Resistance	ISO-10545/12	Resistant	Resistant
Group	ISO-10545/7	2	2
Minimum Bond Strength (PSI)	C482	165	165
Dynamic Coefficient of Friction (DCOF)	A137.1	<0.40	<0.40
Shade and Texture Rating	CTDA	V3	V3
Facial Dimensions	ISO-10545/2	Pass	Pass
Range of Thickness	ISO-10545/2	Pass	Pass
Warpage	ISO-10545/2	Pass	Pass
Wedging	ISO-10545/2	Pass	Pass
PEI	C1027	2	2

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
35”x35”	17.22	2

Available Sizes

35”x35

8.5 mm

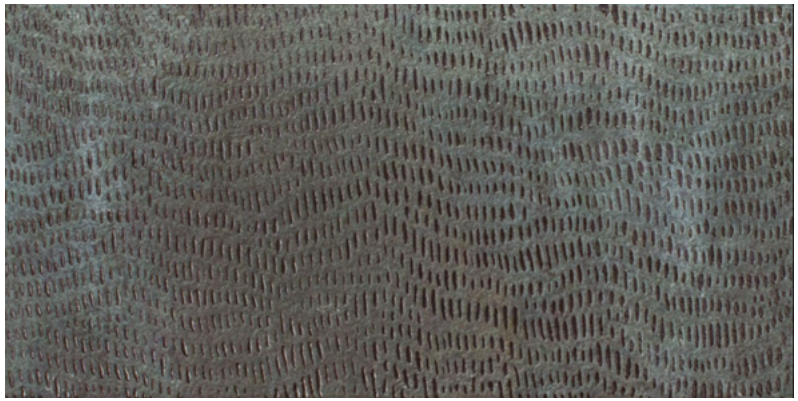

Vulcano Carve

TECHNICAL INFORMATION		
CHARACTERISTICS	STANDARD	Declared ASTM
Water Absorption	ISO-10545/3	<=0.5%
Break Strength	ISO-10545/4	335 Lbs
Scratch Hardness	EN-101	4
Chemical Resistance	ISO-10545/13	Unaffected
Frost Resistance	ISO-10545/12	Resistant
Group	ISO-10545/7	3
Dynamic Coefficient of Friction (DCOF)	A137.1	<=0.42
PEI	C1027	3
Shade and Texture Rating	CTDA	V3
Facial Dimensions	ISO-10545/2	Pass
Range of Thickness	ISO-10545/2	Pass
Warpage	ISO-10545/2	Pass
Wedging	ISO-10545/2	Pass

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
12"x24"	19.38	10

Available Sizes

12"x24" R

zen

ceramic wall

M V1 12 mm

Zen Black

TECHNICAL INFORMATION		
CHARACTERISTICS	**STANDARD**	**Declared ASTM**
Water Absorption	ISO-10545/3	>=0.10%
Break Strength	ISO-10545/4	135 Lbs
Scratch Hardness	EN-101	0
Chemical Resistance	ISO-10545/13	Unaffected
Shade and Texture Rating	CTDA	V1
Warpage	ISO-10545/2	Pass
Wedging	ISO-10545/2	Pass

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
16"x48"	20.67	4

Available Size

16"x48"