Roca

Stone Basel

Stone Basel Grafito 24”x48”

Stone Basel

Stone Basel replicates the soft touch of volcanic rock polished by water and its texture under light in a porcelain proposal for both floor and wall. This collection is ideal for those who seek perfection and take care of every detail.

Color Body Porcelain

48”x48” R - 24”x48” R - 12”x24” R - 16”x48” R Wall

Stone Basel

Stone Basel Caliza 24"x48" R

Stone Basel Gris 12"x24" R

Stone Basel Negro 12"x24" R

Stone Basel

Color Body Porcelain

6-8.7 mm | M | V3 | 50% RECYCLED

48”x48” R	24”x48” R	12”x24” R
120x120 cm	60x120 cm	30x120 cm

Caliza

48"x48" R
FKTEOMHZA1

24"x48" R
FKTR054ZA1

12"x24" R
FKTR057ZA1

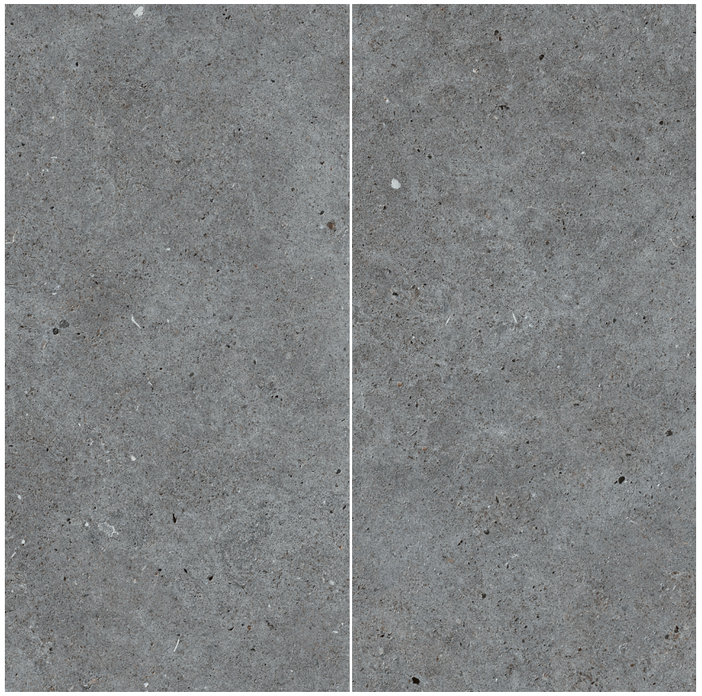

Grafito

48"x48" R
FKTEOMH101

24"x48" R
FKTR054101

12"x24" R
FKTR057101

Gris

48"x48" R
FKTEOMH021

24"x48" R
FKTR054021

12"x24" R
FKTR057021

Negro

48"x48" R
FKTEOMH161

24"x48" R
FKTR054161

12"x24" R
FKTR057161

Stone Basel

Ceramic Wall

10.5 mm | M | V3 | 16”x48” R
40x120 cm

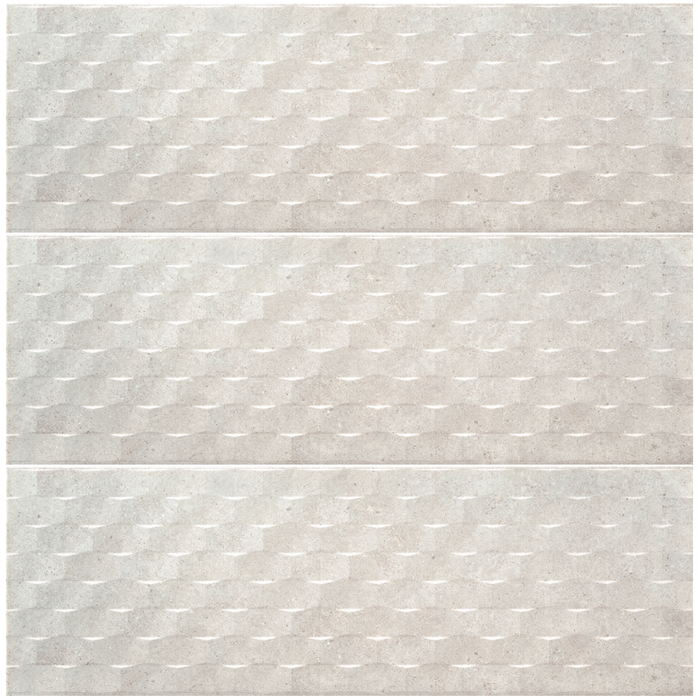

Suite Caliza

16"x48" R
FKTR6MCZA1

Technical Specifications (Floor)

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	C373	<=0.5%
Break Strength	C648	Min. 450
Scratch Hardness	MOH’s Scale	5
Chemical Resistance	C650	Unaffected
Frost Resistance	C1026	Resistant
Group	See FAQ’s	4
Deep Abrasion - Unglazed Tiles	C1243	Pass
PEI- Glazed Tiles***	C1027	-
Minimum Bond Strength (PSI)	C482	165
Dynamic Coefficient of Friction (DCOF)	A137.1	>=0.42
Shade and Texture Rating	CTDA “V”	V3
Facial Dimensions	C499	Pass
Range of Thickness	C499	Pass
Warpage	C485	Pass
Wedging	C502	Pass

Technical Specifications (Wall)

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	C373	>10%
Break Strength	C648	Meets or Exceeds
Scratch Hardness	MOH’s Scale	-
Chemical Resistance	C650	Unaffected
Shade and Texture Rating	CTDA “V”	V3
Warpage	C485	Pass
Wedging	C502	Pass

Packaging Info

Size	SF per carton	PC per carton
12”x24” R	13.56	7
24”x48” R	15.50	2
16”x48” R	15.50	3
48”x48” R	31	2