



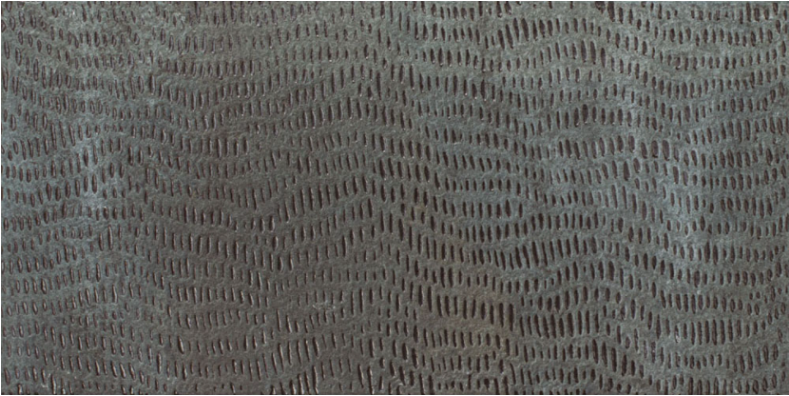

Roca

vulcano

glazed & polished porcelain



Vulcano Carve

TECHNICAL INFORMATION		
CHARACTERISTICS	STANDARD	Declared ASTM
Water Absorption	ISO-10545/3	<=0.5%
Break Strength	ISO-10545/4	335 Lbs
Scratch Hardness	EN-101	4
Chemical Resistance	ISO-10545/13	Unaffected
Frost Resistance	ISO-10545/12	Resistant
Group	ISO-10545/7	3
Dynamic Coefficient of Friction (DCOF)	A137.1	<=0.42
PEI	C1027	3
Shade and Texture Rating	CTDA	V3
Facial Dimensions	ISO-10545/2	Pass
Range of Thickness	ISO-10545/2	Pass
Warpage	ISO-10545/2	Pass
Wedging	ISO-10545/2	Pass

PACKAGING INFORMATION		
SIZE	SF PER CARTON	PC PER CARTON
12"x24"	19.38	10

Available Sizes

12"x24" R