

# Sandstone



# **Sandstone**

An original blend between two stones brings to life this beautiful material, whose charm is found in the richness in textures resulting from the mix of thin veining and soft degraded.

Porcelain Tile

⇒ 12"x24"

# Sandstone

#### Porcelain Tile




# **12"x24"** 300x600 cm





# Beige 12"x24" USANDST16BE

## Other Faces

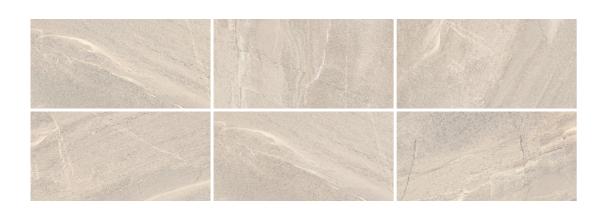

### Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	C373	<=0.5%
Break Strength	C648	Min. 275
Chemical Resistance	C650	Class A (Resist) <sup>1</sup>
Stain Resistance	C1378	Class A
Frost Resistance	C1026	Resistant
Thermal Shock Resistance	C484	Resistant
Crazing Resistance	C424	Resistant
Group	See FAQ's	4
PEI- Glazed Tiles	C1027	PEI (IV)
Dynamic Coefficient of Friction (DCOF)	A326.3	>=0.42
Shade and Texture Rating	CTDA "V"	V3
Facial Dimensions	C499	Pass
Range of Thickness	C499	Pass
Warpage	C485	Pass
Wedging	C502	Pass

### Packaging Info

Size	SF per carton	PC per carton	Bx per pallet
12"x24"	17.44	9	32

4 | Basalt | 5