



**Roca**

**Bosco**




Bosco Roble 8"x48" R




Bosco Vison 8"x48" R & Suite Bosco Vison 12"x24" R



Bosco Gris 8"x48" R



**8"x48" R**  
20x120cm

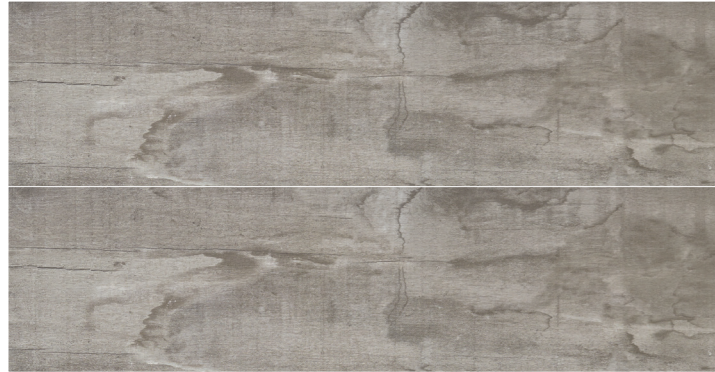

## Gris

**8"x48" R**  
FDAROFPO21



## Roble

**8"x48" R**  
FDAROF741



## Vison

**8"x48" R**  
FDAROF141

## Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	ISO-10545/3	<=0.5
Break Strength	ISO-10545/4	Min. 450
Scratch Hardness	EN-101	6
Chemical Resistance	ISO-10545/13	Unaffected
Frost Resistance	ISO-10545/12	Resistant
Group	ISO-10545/7	4
Dynamic Coefficient of Friction (DCOF)	A137.1	>=0.42
Shade and Texture Rating	CTDA "V"	V3
Facial Dimensions	ISO-10545/2	Pass
Range of Thickness	ISO-10545/2	Pass
Warpage	ISO-10545/2	Pass
Wedging	ISO-10545/2	Pass


## Packaging Info

Size	SF per carton	PC per carton
8"x48" R	10.12	4

 9.4 mm | 
  M | 
  V2 | 
 12"x24"  
30x60cm



## Suite Gris



12"x24"  
FDAR557021




## Suite Roble



12"x24"  
FDAR157741



## Suite Vison



12"x24"  
FDAR157141

## Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	ISO-10545/3	>10
Break Strength	ISO-10545/4	N/A
Scratch Hardness	EN-101	-
Chemical Resistance	ISO-10545/13	Unaffected
Shade and Texture Rating	CTDA "V"	V2
Warpage	ISO-10545/2	Pass
Wedging	ISO-10545/2	Pass

## Packaging Info

Size	SF per carton	PC per carton
12"x24"	13.56	7