



Theia

DUNE
UNIQUE MATTERS

Roca

Theia

Theia, an extensive collection of marbles with dramatic flair. The dual shades of white and black marbles that illustrate the strength of the stone with its piercing colors and irregular veining, forming a dramatic covering in copper and golden hues.



Theia 11.8"x35.4"



Theia Talasa 11.8"x35.4"



Theia Satin 35.4"x35.4"



Theia Satin 35.4"x35.4"

Theia

Ceramic Wall & Glazed Porcelain

11mm  **11.8"x35.4"**
30x90 cm



Theia



11.8"x35.4"
188486

Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM
Dimensions	ISO 10545-2	± 0.5%
Water Absorption	ISO 10545-3	E>10%
Chemical Resistance	ISO 10545-13	GA
Flatness	ISO 10545-2	± 0.5%
Crazing Resistance	ISO 10545-11	Accomplish
Resistance to Stains	ISO 10545-14	5
Chemical Resistance Swimmingpool	ISO 10545-13	GA
Breaking Strength	ISO 10545-4:9	>=125 lbf
Frost Resistance	ISO 10545-12	N/A
Resistance to Thermal Shock	ISO 10545-9	Accomplish



Theia 11.8"x35.4"


Packaging Info

Size	SF per carton	PC per carton	BX per pallet
11.8"x35.4"	39.83	4	48


Theia

Ceramic Wall & Glazed Porcelain

10mm  **35.4"x35.4"**
90x90 cm

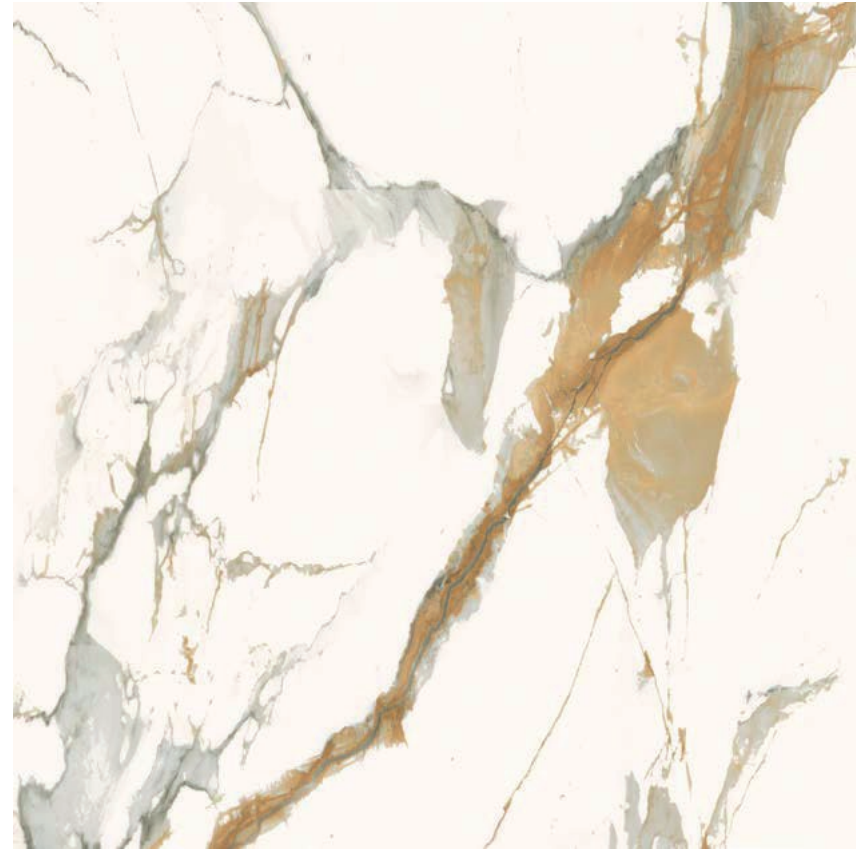

Theia



35.4"x35.4"
188450

Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM
Dimensions	ISO 10545-2	± 0.6%
Water Absorption	ISO 10545-3	E≤0.5%
Resistance to Surface Abrasion	ISO 10545-7	Class 4
Chemical Resistance	ISO 10545-13	GHB
Flatness	ISO 10545-2	± 0.5%
Crazing Resistance	ISO 10545-11	Accomplish
Resistance to Stains	ISO 10545-14	5
Slip Resistance	41901 EX	Class 0
Breaking Strength	ISO 10545-4:9	≥350 lbf
Frost Resistance	ISO 10545-12	Accomplish
Resistance to Thermal Shock	ISO 10545-9	Accomplish

Packaging Info

Size	SF per carton	PC per carton	BX per pallet
35.4"x35.4"	13.35	1	80



Theia 35.4"x35.4"


Theia

Ceramic Wall & Glazed Porcelain

9mm **23.6"x23.6"**
60x60 cm



Theia Satin



23.6"x23.6"
188483

Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM
Dimensions	ISO 10545-2	± 0.6%
Water Absorption	ISO 10545-3	E≤0.5%
Resistance to Surface Abrasion	ISO 10545-7	Class 4
Chemical Resistance	ISO 10545-13	GA
Flatness	ISO 10545-2	± 0.5%
Crazing Resistance	ISO 10545-11	Accomplish
Resistance to Stains	ISO 10545-14	5
Chemical Resistance Swimmingpool	ISO 10545-13	GA
Slip Resistance	41901 EX	Class O
Breaking Strength	ISO 10545-4:9	≥350 lbf
Frost Resistance	ISO 10545-12	Accomplish
Resistance to Thermal Shock	ISO 10545-9	Accomplish

Packaging Info

Size	SF per carton	PC per carton	BX per pallet
23.6"x23.6"	29.92	3	40


Theia

Ceramic Wall & Glazed Porcelain

10mm  **35.4"x35.4"**
90x90 cm



Theia Satin



35.4"x35.4"
188464

Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM
Dimensions	ISO 10545-2	± 0.6%
Water Absorption	ISO 10545-3	E≤0.5%
Resistance to Surface Abrasion	ISO 10545-7	Class 4
Chemical Resistance	ISO 10545-13	GHB
Flatness	ISO 10545-2	± 0.5%
Crazing Resistance	ISO 10545-11	Accomplish
Resistance to Stains	ISO 10545-14	5
Slip Resistance	41901 EX	Class 0
Breaking Strength	ISO 10545-4:9	≥350 lbf
Frost Resistance	ISO 10545-12	Accomplish
Resistance to Thermal Shock	ISO 10545-9	Accomplish

Packaging Info

Size	SF per carton	PC per carton	BX per pallet
35.4"x35.4"	13.35	1	80




Theia Satin 35.4"x35.4"

Theia

Ceramic Wall & Glazed Porcelain

10mm  **10"x11.6"**
25.5x29.5 cm

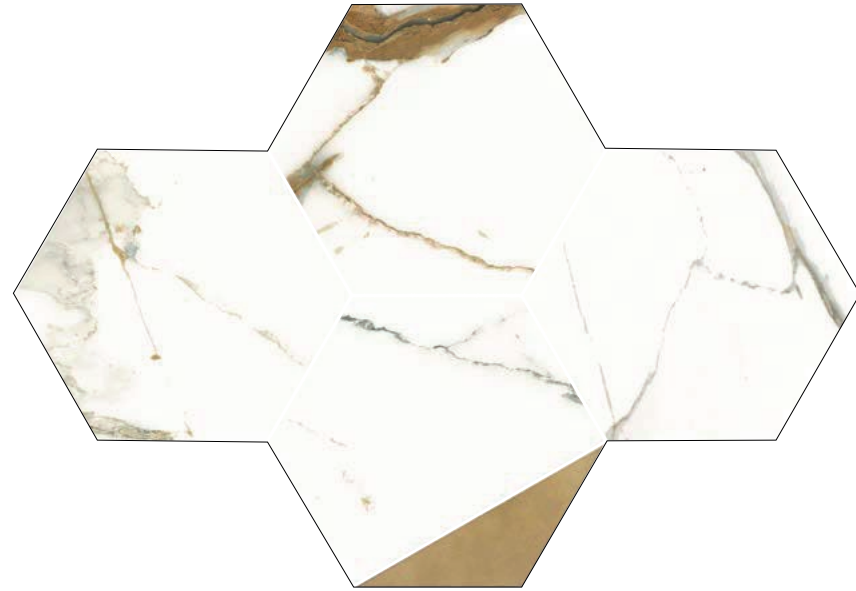

Mosaico Theia



10"x11.6"
188519

Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM
Dimensions	ISO 10545-2	± 0.5%
Flatness	ISO 10545-2	± 0.5%
Crazing Resistance	ISO 10545-11	Accomplish
Resistance to Stains	ISO 10545-14	5
Chemical Resistance Swimmingpool	ISO 10545-13	GA
Breaking Strength	ISO 10545-4:9	>=125 lbf
Frost Resistance	ISO 10545-12	Accomplish
Resistance to Thermal Shock	ISO 10545-9	Accomplish



Mosaico Theia 10"x11.6"

Packaging Info

Size	SF per carton	PC per carton	BX per pallet
10"x11.6"	143.05	6	48